




V2P 2.0


Permanent overvoltage
protector against mains
voltage increases in **single-**
phase installations.



Dimensions

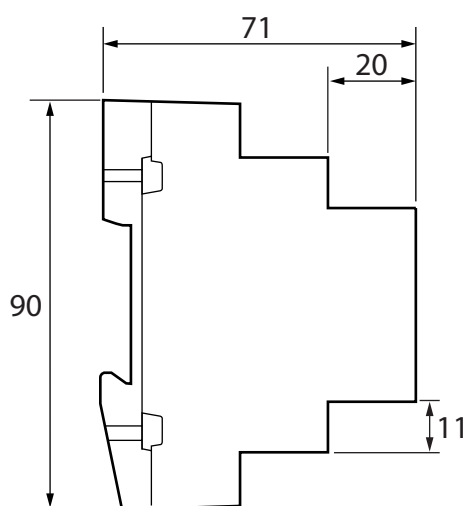

Electrical diagram

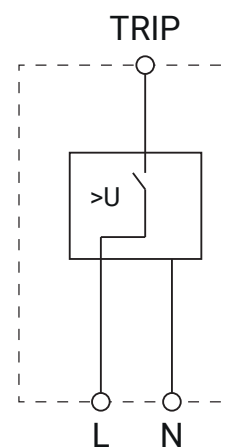

Models

Code	Reference
10002612	V2P 2.0

Scan for more
information:





Technical specifications

GENERALS	Rated voltage Un	240 VAC
	Frequency	50-60 Hz
	Power consumption	0.2 VA
	Maximum terminal cross-section	25 mm ²
	Alarm contact	6 A / 30 VDC, 6 A / 250 VAC
	Environmental limits	-20° +70° C / 80% H.R.
	Protection	IP20
	Mounting	Rail DIN 35
	Number of DIN modules	1
	Standards	2014/35/UE (LVD) 2014/30/UE (EMC) 2011/65/UE (RoHS)
	Dimensions (width x height x depth)	18 x 90 x 71 mm
	Average weight approx.	60 g
PERM	Disconnection voltage	according to standards UNE-EN 50550/63052
	Overvoltage response time	IEC 63052:2019