

SURGE PROTECTIVE DEVICE





V3P 3.0

Permanent overvoltage
protector against mains
voltage increases in **three-**
phase installations.




DATASHEET

Dimensions

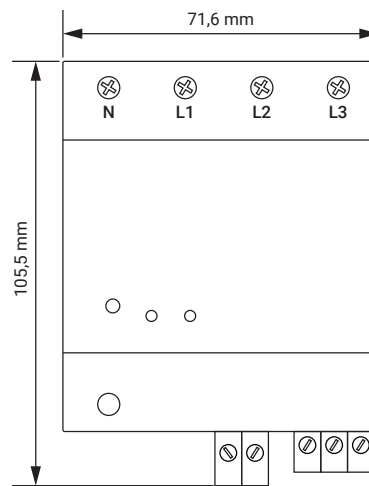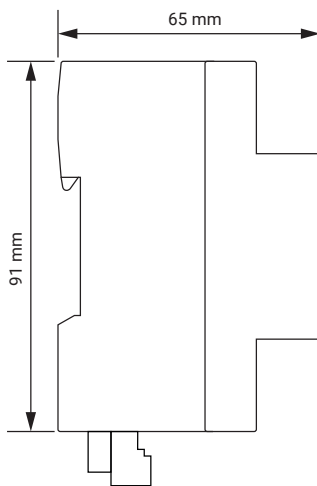

Electrical diagram

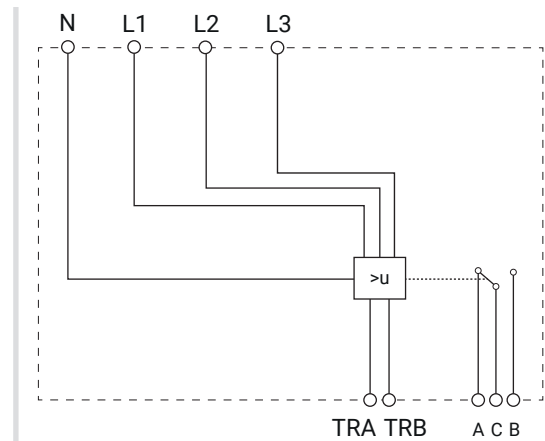

Models

Code	Reference
10003367	V3P 3.0

Scan for more
information:





Technical specifications

GENERALS	Rated voltage Un	240 VAC (N/L1, N/L2, N/L3)
	Frequency	50-60 Hz
	Power consumption	0,6 VA
	Maximum terminal cross-section	25 mm ²
	Alarm contact	6 A / 30 VDC, 6 A / 250 VAC
	Environmental limits	-20° +70° C / 80% H.R.
	Protection	IP20
	Mounting	Rail DIN 35
	Number of DIN modules	4
	Standards	2014/35/UE (LVD) 2014/30/UE (EMC) 2011/65/UE (RoHS)
	Dimensions (width x height x depth)	71.6 x 105.5 x 65 mm
	Average weight approx.	245 g
PERM	Disconnection voltage	According to standard UNE-EN 50550/63052
	Overvoltage response time	IEC 63052:2019