





DUO2.0


Protector against
permanent and transient
overvoltages.
Type 2.



Dimensions

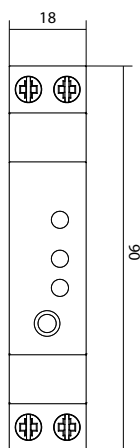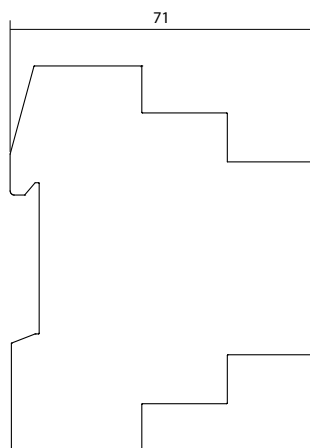

Electrical diagram

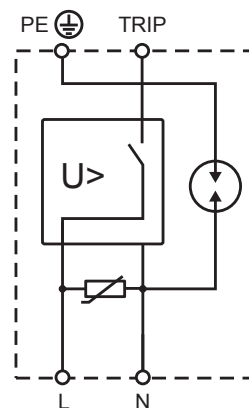

Models

Code	Reference
10002613	DUO2.0

Scan for more
information:





Technical specifications

GENERALS	Rated voltage Un (L-N)	240 VAC
	Frequency	50-60 Hz
	Consumption	0,3 W
	Maximum terminal cross-section	6 mm ²
	Environmental limits	-20° +70° C / 80% H.R.
	Protection	IP20
	Mounting	Rail DIN 35
	N° of DIN modules	1
	Standards	2014/35/UE (LVD) 2014/30/UE (EMC) 2011/65/UE (RoHS)
	Dimensions (width x height x depth)	18 x 90 x 71 mm
PERM.	Average weight approx.	66 g
	Disconnection voltage	265 VAC ±2%
TRANS.	Overvoltage response time	according to UNE-EN50550/63052
	Level protection Up	≤1,5 kV
	Maximum discharge current (8/20µs) Imax	12,5 kA
	Type	2