




## DIMENSIONS



## AWARDS

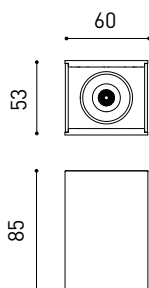

Name	BLACK FOSTER SURF 1 2700K WT
Reference	A3201010WT
Color	Textured white
RAL	9016
Category	SURFACE

## PRODUCT

BLACK FOSTER SURF 1 2700K WT

A3201010WT

Textured white

9016

SURFACE

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,00 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	38°
Unified Glare Rating	UGR<19
Lighting efficiency	90%
Efficacy	90 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Weight	260 g.
Packaged weight	310 g.
Packaging dimensions	254 × 93 × 70 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster Surface is the product that transfers the claimed effect "The Invisible Black" to a linear system in surface application. Black Foster has a very discrete presence in the interior design due to its reduced dimensions and its extremely low glare helping the piece not to gain much prominence.

POLAR DIAGRAM

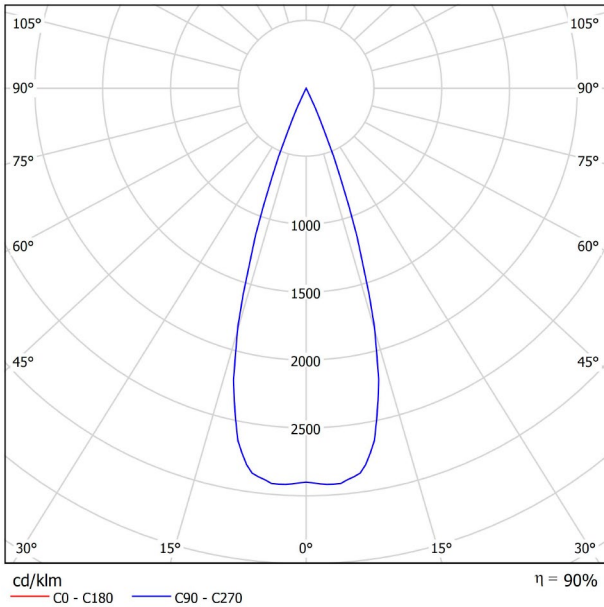

CONICAL DIAGRAM

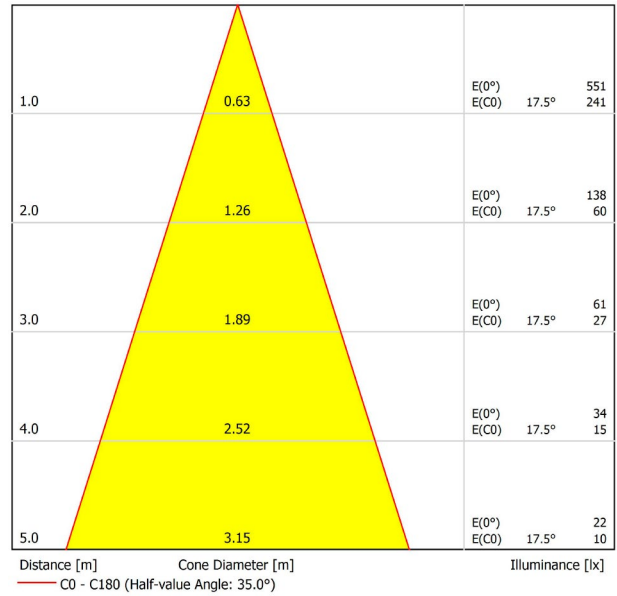

UGR

Glare Evaluation According to UGR											
ρ Ceiling	70	70	50	50	30	70	70	50	50	30	
ρ Walls	50	30	50	30	30	50	30	50	30	30	
ρ Floor	20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	-6.7	-6.1	-6.4	-5.9	-5.7	-6.7	-6.1	-6.4	-5.9	-5.7
	3H	-6.8	-6.2	-6.5	-6.0	-5.8	-6.8	-6.2	-6.5	-6.0	-5.8
	4H	-6.9	-6.4	-6.6	-6.1	-5.8	-6.9	-6.4	-6.6	-6.1	-5.8
	6H	-7.0	-6.5	-6.6	-6.2	-5.9	-7.0	-6.5	-6.6	-6.2	-5.9
	8H	-7.0	-6.5	-6.7	-6.2	-5.9	-7.0	-6.5	-6.7	-6.2	-5.9
4H	12H	-7.0	-6.6	-6.7	-6.3	-6.0	-7.0	-6.6	-6.7	-6.3	-6.0
	2H	-6.9	-6.4	-6.6	-6.1	-5.8	-6.9	-6.4	-6.6	-6.1	-5.8
	3H	-7.0	-6.6	-6.7	-6.3	-6.0	-7.0	-6.6	-6.7	-6.3	-6.0
	4H	-7.1	-6.7	-6.7	-6.4	-6.1	-7.1	-6.7	-6.7	-6.4	-6.1
	6H	-7.2	-6.9	-6.8	-6.5	-6.1	-7.2	-6.9	-6.8	-6.5	-6.1
8H	8H	-7.2	-6.9	-6.8	-6.6	-6.2	-7.2	-6.9	-6.8	-6.6	-6.2
	12H	-7.3	-7.0	-6.8	-6.6	-6.2	-7.3	-7.0	-6.8	-6.6	-6.2
	4H	-7.2	-6.9	-6.8	-6.6	-6.2	-7.2	-6.9	-6.8	-6.6	-6.2
	6H	-7.3	-7.1	-6.9	-6.7	-6.2	-7.3	-7.1	-6.9	-6.7	-6.2
	8H	-7.4	-7.2	-6.9	-6.8	-6.3	-7.4	-7.2	-6.9	-6.8	-6.3
12H	12H	-7.4	-7.3	-6.9	-6.8	-6.3	-7.4	-7.3	-6.9	-6.8	-6.3
	4H	-7.3	-7.0	-6.8	-6.6	-6.2	-7.3	-7.0	-6.8	-6.6	-6.2
	6H	-7.4	-7.2	-6.9	-6.8	-6.3	-7.4	-7.2	-6.9	-6.8	-6.3
8H	-7.4	-7.3	-6.9	-6.8	-6.3	-7.4	-7.3	-6.9	-6.8	-6.3	
Variation of the observer position for the luminaire distances S											
S = 1.0H	+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H	+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H	+0.0 / 0.0					+0.0 / 0.0					
Standard table	BK00					BK00					
Correction Summand	-20.0					-20.0					
Corrected Glare Indices referring to 190lm Total Luminous Flux											