




## DIMENSIONS



## AWARDS




Name	BLACK FOSTER SURF 1 3000K WT
Reference	A3201011WT
Color	Textured white
RAL	9016
Category	SURFACE
<b>PRODUCT</b>	
<b>LIGHTING INFORMATION</b>	
Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	3,00 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	38°
Unified Glare Rating	UGR<19
Lighting efficiency	90%
Efficacy	100 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h
<b>OTHER DATA</b>	
Ingress Protection	IP20
Weight	260 g.
Packaged weight	310 g.
Packaging dimensions	254 × 93 × 70 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster Surface is the product that transfers the claimed effect "The Invisible Black" to a linear system in surface application. Black Foster has a very discrete presence in the interior design due to its reduced dimensions and its extremely low glare helping the piece not to gain much prominence.

POLAR DIAGRAM

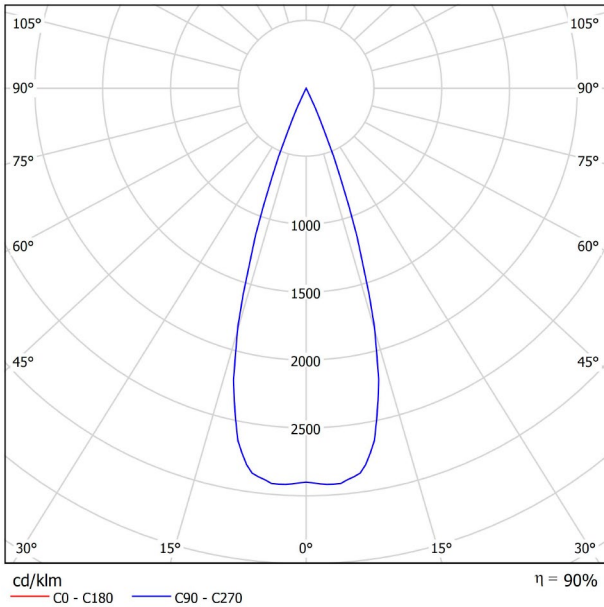

CONICAL DIAGRAM

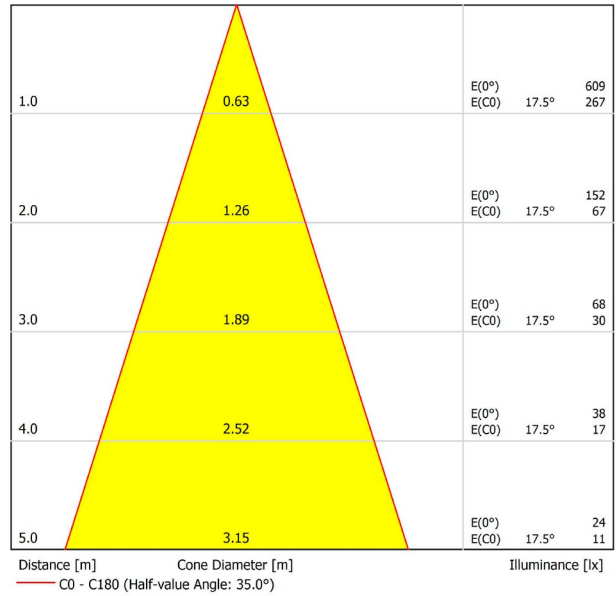

UGR

Glare Evaluation According to UGR											
ρ Ceiling	70	70	50	50	30	70	70	50	50	30	30
ρ Walls	50	30	50	30	30	50	30	50	30	30	20
ρ Floor	20	20	20	20	20	20	20	20	20	20	20
Room Size		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
X	Y										
2H	2H	-6.3	-5.7	-6.1	-5.5	-5.3	-6.3	-5.7	-6.1	-5.5	-5.3
	3H	-6.5	-5.9	-6.2	-5.7	-5.4	-6.5	-5.9	-6.2	-5.7	-5.4
	4H	-6.5	-6.0	-6.2	-5.8	-5.5	-6.5	-6.0	-6.2	-5.8	-5.5
	6H	-6.6	-6.1	-6.3	-5.8	-5.6	-6.6	-6.1	-6.3	-5.8	-5.6
	8H	-6.7	-6.2	-6.3	-5.9	-5.6	-6.7	-6.2	-6.3	-5.9	-5.6
4H	12H	-6.7	-6.2	-6.3	-5.9	-5.6	-6.7	-6.2	-6.3	-5.9	-5.6
	2H	-6.5	-6.0	-6.2	-5.8	-5.5	-6.5	-6.0	-6.2	-5.8	-5.5
	3H	-6.7	-6.2	-6.3	-5.9	-5.6	-6.7	-6.2	-6.3	-5.9	-5.6
	4H	-6.8	-6.4	-6.4	-6.0	-5.7	-6.8	-6.4	-6.4	-6.0	-5.7
	6H	-6.8	-6.5	-6.4	-6.2	-5.8	-6.8	-6.5	-6.4	-6.2	-5.8
8H	8H	-6.9	-6.6	-6.5	-6.2	-5.8	-6.9	-6.6	-6.5	-6.2	-5.8
	12H	-6.9	-6.7	-6.5	-6.3	-5.9	-6.9	-6.7	-6.5	-6.3	-5.9
	4H	-6.9	-6.6	-6.5	-6.2	-5.8	-6.9	-6.6	-6.5	-6.2	-5.8
	6H	-7.0	-6.8	-6.5	-6.3	-5.9	-7.0	-6.8	-6.5	-6.3	-5.9
	8H	-7.0	-6.8	-6.5	-6.4	-5.9	-7.0	-6.8	-6.5	-6.4	-5.9
12H	12H	-7.1	-6.9	-6.6	-6.5	-6.0	-7.1	-6.9	-6.6	-6.5	-6.0
	4H	-6.9	-6.7	-6.5	-6.3	-5.9	-6.9	-6.7	-6.5	-6.3	-5.9
	6H	-7.0	-6.8	-6.5	-6.4	-5.9	-7.0	-6.8	-6.5	-6.4	-5.9
8H	-7.1	-6.9	-6.6	-6.5	-6.0	-7.1	-6.9	-6.6	-6.5	-6.0	
Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0				
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0				
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0				
Standard table		BK00					BK00				
Correction Summand		-20.0					-20.0				
Corrected Glare Indices referring to 210lm Total Luminous Flux											