





DIMENSIONS



AWARDS



PRODUCT	
Name	BLACK FOSTER SURF 5 DIM 1/10V 3000K NT
Reference	A3204041NT
Color	Textured black
RAL	9005
Category	SURFACE
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	1050 Lm
Power	10,5 W
Power values of the system	11,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	38°
Unified Glare Rating	UGR<19
Lighting efficiency	90%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	1-10V
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP20
Weight	800 g.
Packaged weight	850 g.
Packaging dimensions	254 × 93 × 70 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster Surface is the product that transfers the claimed effect "The Invisible Black" to a linear system in surface application. Black Foster has a very discrete presence in the interior design due to its reduced dimensions and its extremely low glare helping the piece not to gain much prominence.

POLAR DIAGRAM



CONICAL DIAGRAM

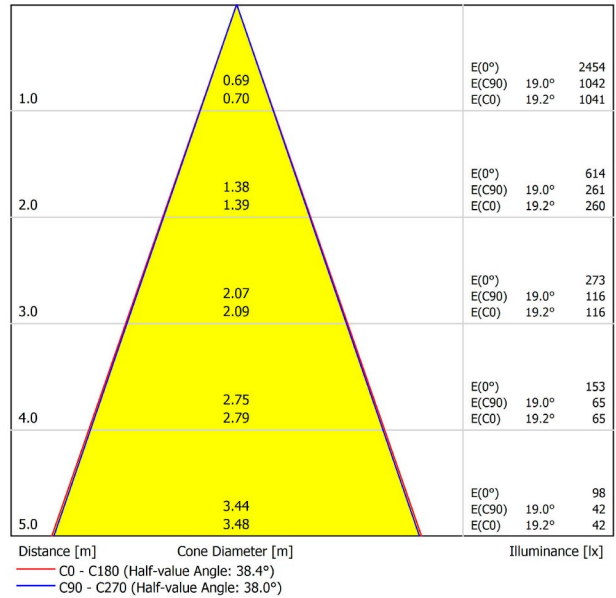

UGR

Glare Evaluation According to UGR															
ρ Ceiling	70	70	50	50	30	70	70	50	50	30	70	70	50	50	30
ρ Walls	50	30	50	30	30	50	30	50	30	30	20	20	20	20	20
ρ Floor	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis								
2H	2H	-13.5	-12.8	-13.2	-12.7	-12.5	-14.3	-13.7	-14.1	-13.5	-13.3				
	3H	-7.2	-6.6	-6.9	-6.4	-6.1	-7.0	-6.5	-6.8	-6.2	-6.0				
	4H	-3.7	-3.1	-3.4	-2.9	-2.6	-3.1	-2.5	-2.8	-2.3	-2.0				
	6H	-0.0	0.5	0.3	0.8	1.0	0.4	0.9	0.7	1.1	1.4				
	8H	1.8	2.3	2.2	2.6	2.9	2.2	2.6	2.5	2.9	3.2				
4H	12H	3.8	4.3	4.2	4.6	4.9	4.2	4.6	4.5	5.0	5.3				
	2H	-10.9	-10.4	-10.6	-10.1	-9.9	-11.3	-10.7	-11.0	-10.5	-10.2				
	3H	-4.9	-4.5	-4.6	-4.2	-3.9	-4.8	-4.3	-4.4	-4.0	-3.7				
	4H	-1.5	-1.1	-1.1	-0.8	-0.4	-1.1	-0.7	-0.7	-0.3	0.0				
	6H	2.0	2.4	2.4	2.7	3.1	2.4	2.7	2.8	3.0	3.4				
8H	8H	3.9	4.2	4.3	4.6	5.0	4.2	4.5	4.6	4.9	5.3				
	12H	6.0	6.2	6.4	6.6	7.0	6.3	6.5	6.7	6.9	7.3				
	4H	0.0	0.3	0.4	0.7	1.1	0.3	0.6	0.7	1.0	1.4				
	6H	3.7	3.9	4.1	4.3	4.7	3.9	4.1	4.3	4.5	5.0				
	8H	5.6	5.8	6.1	6.3	6.7	5.8	6.0	6.3	6.5	6.9				
12H	12H	7.8	7.9	8.3	8.4	8.9	8.1	8.2	8.6	8.7	9.2				
	4H	0.5	0.8	1.0	1.2	1.6	0.8	1.0	1.2	1.4	1.9				
	6H	4.3	4.4	4.7	4.9	5.3	4.4	4.6	4.9	5.0	5.5				
8H	6.3	6.5	6.8	6.9	7.4	6.5	6.6	7.0	7.1	7.6					
Variation of the observer position for the luminaire distances S															
S = 1.0H	+0.9 / -0.3					+1.3 / -0.4									
S = 1.5H	+1.9 / -0.6					+2.7 / -0.7									
S = 2.0H	+3.1 / -0.8					+4.2 / -1.0									
Standard table	---					---									
Correction Summand	---					---									
Corrected Glare Indices referring to 1050lm Total Luminous Flux															