



## DIMENSIONS



## AWARDS



Name	BLACK FOSTER SUSP 1200 DIM ON BOARD 4000K NT
Reference	A3211052NT
Color	Textured black
RAL	9005
Category	SUSPENSION

## PRODUCT

BLACK FOSTER SUSP 1200 DIM ON BOARD 4000K NT  
A3211052NT  
Textured black  
9005  
SUSPENSION

Light source	LED
Gross luminous flux	2500 Lm
Power	21 W
Power values of the system	23,33 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	38°
Unified Glare Rating	UGR<19
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	ON BOARD
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

## LIGHTING INFORMATION

LED  
2500 Lm  
21 W  
23,33 W  
4000 K  
CRI>90  
Mac Adam Step 3  
38°  
UGR<19  
90%  
119 Lm/W  
700 mA  
ON BOARD  
Please Consult  
Included  
  
220 V/240 V  
50/60 Hz  
A+  
L80B10 (Tc=85°C) >60.000h

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	3400 g.
Packaged weight	4470 g.
Packaging dimensions	D145 x 1270 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

## OTHER DATA

IP20  
2 m  
Yes  
3400 g.  
4470 g.  
D145 x 1270 mm.




Black Foster Suspension es la luminaria que traslada el aclamado efecto 'The Invisible Black' a un sistema lineal de suspensión. Se compone de una serie de módulos de emisión de luz dentro de un foseado metálico. Ofrece iluminación "no-glare" en aplicaciones sobre mesas y conserva la misma estética tanto encendida como apagada.

POLAR DIAGRAM



CONICAL DIAGRAM

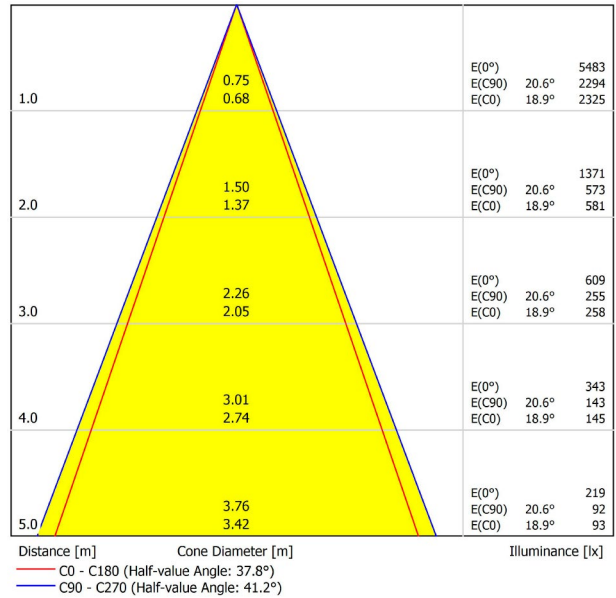

UGR

Glare Evaluation According to UGR											
$\rho$ Ceiling	70	70	50	50	30	70	70	50	50	30	
$\rho$ Walls	50	30	50	30	30	50	30	50	30	30	
$\rho$ Floor	20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	-23.8	-23.2	-23.6	-23.0	-22.8	-20.8	-20.1	-20.5	-20.0	-19.8
	3H	-12.1	-11.5	-11.8	-11.3	-11.0	-15.1	-14.5	-14.8	-14.3	-14.0
	4H	-11.6	-11.0	-11.3	-10.8	-10.5	-13.4	-12.8	-13.1	-12.6	-12.3
	6H	-8.5	-8.0	-8.2	-7.7	-7.5	-10.1	-9.6	-9.8	-9.3	-9.0
4H	8H	-8.5	-8.0	-8.1	-7.7	-7.4	-8.1	-7.6	-7.8	-7.3	-7.1
	12H	-7.1	-6.6	-6.8	-6.3	-6.0	-6.4	-6.0	-6.1	-5.7	-5.3
	2H	-16.5	-15.9	-16.2	-15.7	-15.4	-16.0	-15.4	-15.7	-15.2	-14.9
8H	3H	-11.4	-10.9	-11.0	-10.6	-10.3	-12.7	-12.2	-12.3	-11.9	-11.6
	4H	-8.7	-8.3	-8.3	-8.0	-7.6	-11.6	-11.2	-11.3	-10.9	-10.6
	6H	-6.2	-5.9	-5.8	-5.5	-5.2	-7.1	-6.8	-6.7	-6.4	-6.0
	8H	-6.1	-5.8	-5.7	-5.5	-5.1	-5.8	-5.6	-5.4	-5.2	-4.8
12H	12H	-5.0	-4.7	-4.6	-4.3	-3.9	-4.5	-4.2	-4.1	-3.8	-3.4
	4H	-8.6	-8.3	-8.2	-7.9	-7.5	-10.8	-10.5	-10.4	-10.2	-9.8
	6H	-4.9	-4.7	-4.4	-4.3	-3.8	-6.1	-5.9	-5.6	-5.5	-5.0
8H	8H	-4.6	-4.4	-4.1	-4.0	-3.5	-5.0	-4.8	-4.5	-4.4	-3.9
	12H	-3.6	-3.4	-3.1	-3.0	-2.5	-3.8	-3.6	-3.3	-3.2	-2.7
	4H	-8.3	-8.0	-7.8	-7.6	-7.2	-9.9	-9.6	-9.4	-9.2	-8.8
12H	6H	-4.7	-4.6	-4.3	-4.1	-3.6	-5.8	-5.6	-5.3	-5.2	-4.7
	8H	-4.4	-4.3	-3.9	-3.8	-3.3	-4.7	-4.6	-4.3	-4.1	-3.6
Variation of the observer position for the luminaire distances S											
S = 1.0H	+2.4 / -1.3					+3.7 / -1.4					
S = 1.5H	+4.4 / -1.5					+6.0 / -1.8					
S = 2.0H	+6.3 / -4.1					+8.0 / -2.2					
Standard table	BK07					---					
Correction Summand	-24.6					---					
Corrected Glare Indices referring to 2500lm Total Luminous Flux											