




DIMENSIONS



AWARDS

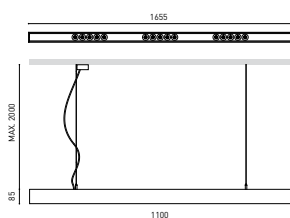

Name	BLACK FOSTER SUSP 1600 DIM ON BOARD 4000K WT
Reference	A3212052WT
Color	Textured white
RAL	9016
Category	SUSPENSION

Light source	LED
Gross luminous flux	3750 Lm
Power	21 W
Power values of the system	23,33 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	38°
Unified Glare Rating	UGR<19
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	ON BOARD
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	4420 g.
Packaged weight	5840 g.
Packaging dimensions	D145 x 1735 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

PRODUCT

BLACK FOSTER SUSP 1600 DIM ON BOARD 4000K WT

A3212052WT

Textured white

9016

SUSPENSION

LIGHTING INFORMATION

LED

3750 Lm

21 W

23,33 W

4000 K

CRI>90

Mac Adam Step 3

38°

UGR<19

90%

119 Lm/W

700 mA

ON BOARD

Please Consult

Included



220 V/240 V

50/60 Hz

A+

L80B10 (Tc=85°C) >60.000h

OTHER DATA

IP20

2 m

Yes

4420 g.

5840 g.


D145 x 1735 mm.

1


Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate



POLAR DIAGRAM

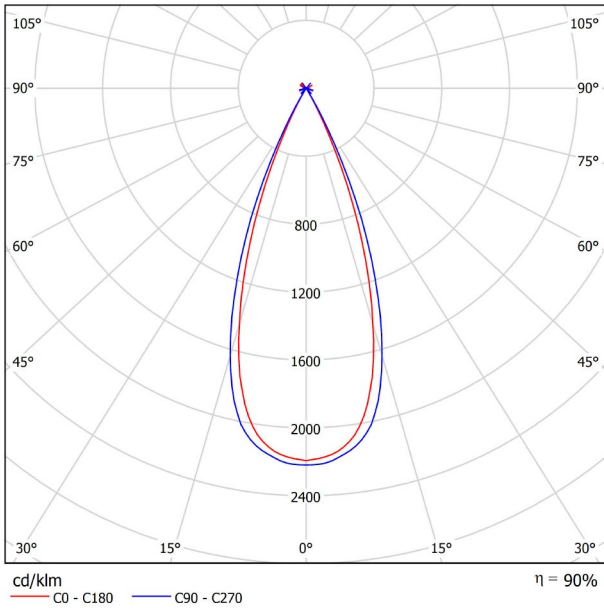

CONICAL DIAGRAM

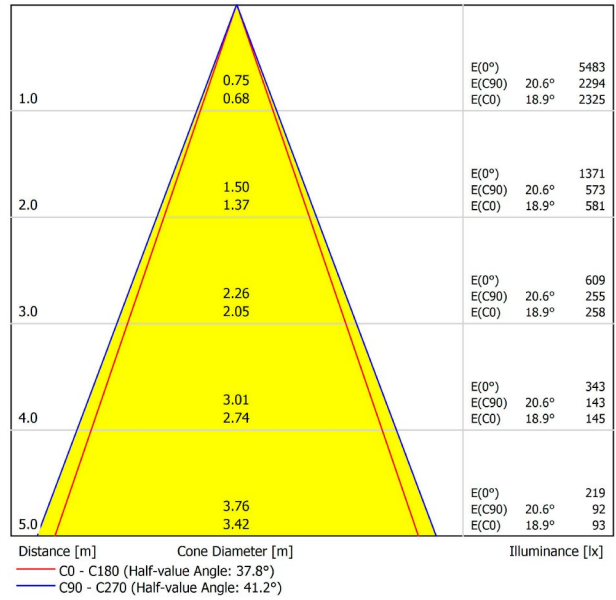

UGR

Glare Evaluation According to UGR												
ρ Ceiling	70	70	50	50	30	70	70	50	50	30	70	70
ρ Walls	50	30	50	30	30	50	30	50	30	30	50	30
ρ Floor	20	20	20	20	20	20	20	20	20	20	20	20
Room Size		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
X	Y											
2H	2H	-23.8	-23.2	-23.6	-23.0	-22.8	-20.8	-20.1	-20.5	-20.0	-19.8	-19.8
	3H	-12.1	-11.5	-11.8	-11.3	-11.0	-15.1	-14.5	-14.8	-14.3	-14.0	-14.0
	4H	-11.6	-11.0	-11.3	-10.8	-10.5	-13.4	-12.8	-13.1	-12.6	-12.3	-12.3
	6H	-8.5	-8.0	-8.2	-7.7	-7.5	-10.1	-9.6	-9.8	-9.3	-9.0	-9.0
4H	2H	-16.5	-15.9	-16.2	-15.7	-15.4	-16.0	-15.4	-15.7	-15.2	-14.9	-14.9
	3H	-11.4	-10.9	-11.0	-10.6	-10.3	-12.7	-12.2	-12.3	-11.9	-11.6	-11.6
	4H	-8.7	-8.3	-8.3	-8.0	-7.6	-11.6	-11.2	-11.3	-10.9	-10.6	-10.6
	6H	-6.2	-5.9	-5.8	-5.5	-5.2	-7.1	-6.8	-6.7	-6.4	-6.0	-6.0
8H	2H	-6.1	-5.8	-5.7	-5.5	-5.1	-5.8	-5.6	-5.4	-5.2	-4.8	-4.8
	3H	-5.0	-4.7	-4.6	-4.3	-3.9	-4.5	-4.2	-4.1	-3.8	-3.4	-3.4
	4H	-8.6	-8.3	-8.2	-7.9	-7.5	-10.8	-10.5	-10.4	-10.2	-9.8	-9.8
	6H	-4.9	-4.7	-4.4	-4.3	-3.8	-6.1	-5.9	-5.6	-5.5	-5.0	-5.0
12H	2H	-4.6	-4.4	-4.1	-4.0	-3.5	-5.0	-4.8	-4.5	-4.4	-3.9	-3.9
	3H	-3.6	-3.4	-3.1	-3.0	-2.5	-3.8	-3.6	-3.3	-3.2	-2.7	-2.7
	4H	-8.3	-8.0	-7.8	-7.6	-7.2	-9.9	-9.6	-9.4	-9.2	-8.8	-8.8
	6H	-4.7	-4.6	-4.3	-4.1	-3.6	-5.8	-5.6	-5.3	-5.2	-4.7	-4.7
12H	2H	-4.4	-4.3	-3.9	-3.8	-3.3	-4.7	-4.6	-4.3	-4.1	-3.6	-3.6
	3H											
	4H											
	6H											
Variation of the observer position for the luminaire distances S												
S = 1.0H		+2.4 / -1.3					+3.7 / -1.4					
S = 1.5H		+4.4 / -1.5					+6.0 / -1.8					
S = 2.0H		+6.3 / -4.1					+8.0 / -2.2					
Standard table		BK07					---					
Correction		-					---					
Summand		-24.6					---					
Corrected Glare Indices referring to 2500lm Total Luminous Flux												