




## DIMENSIONS



## ACCESSORIES



HIGH CHROMATIC LED

## AWARDS



## PRODUCT

Name	SIX M RECESSED 2 DIM DALI 19° 3000K NT
Reference	A3322211NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2130 Lm
Power	17 W
Power values of the system	19,54 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	19°
Lighting efficiency	93%
Efficacy	125 Lm/W
Current intensity	500 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h

## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	310°
Rotation angle	350°
Weight	443 g.
Packaged weight	555 g.
Packaging dimensions	203 × 180 × 81 mm.
Units per package	1
Materials	Aluminium / Polycarbonate


Pending

Six Recessed is a spotlight for single recessed lighting solutions that stands out for its elegance and airiness. Its body; disk looking, rounded shaped, encloses an innovative combination of reflector and lens. The combined action of both, allows Six to direct light rays with the maximum uniformity in a very small distance that, at the same time, has made possible its differential design-reduced and minimalist-. In addition, Six can be freely articulated due to its airy arm which allows the spotlight to be orientated in any direction.

POLAR DIAGRAM



CONICAL DIAGRAM

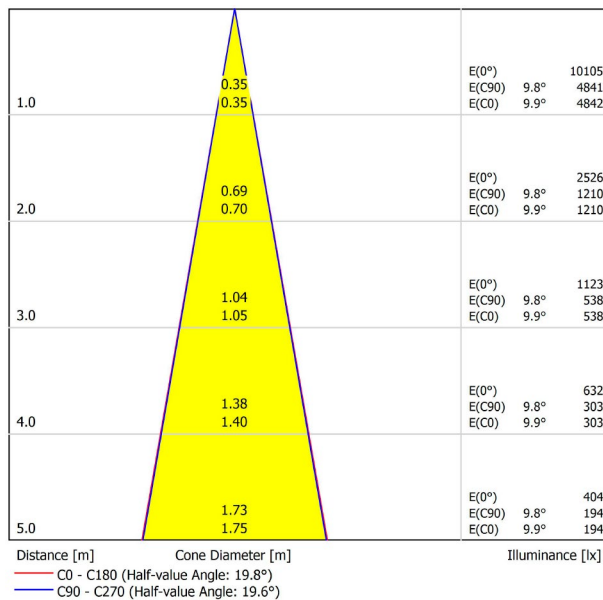

Vivid Model Colour Temperature	2700K	3000K	3500K	4000K	Light Pink
📖 Reading			•	•	
🥕 Fruits & Vegetables		•	•		
🍞 Bakery	•				
👤 Retail		•	•		
💄 Cosmetics			•	•	
🥩 Meat					•
🐟 Fish				•	
🐠 Seafood				•	•



For some of its products, Arkoslight offers the possibility to provide them with a special LED, designed to create an illumination focused on visually promoting goods or products for commercial purposes. It is a high chromaticity LED, capable of identifying the colour shades that produce a positive psychological perception of the illuminated object.

This special LED lighting source offers a much more attractive and intense colour range than a conventional LED, besides being much wider. Technically, this is possible thanks to a special LED setting that includes a «special saturation parameter», capable of highlighting the objects colours and materials in such a way that they seem more attractive within the visible light spectrum. To achieve this performance, in each case, the appropriate diode and specific phosphor coating are carefully selected.