


SIX RECESSED

ARKOSLIGHT®



DIMENSIONS

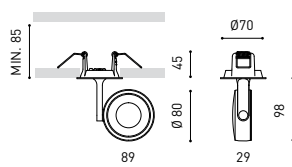

ACCESSORIES



HIGH CHROMATIC LED

AWARDS



Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

| | |
|-----------|--|
| Name | SIX M RECESSED 2 DIM DALI 38° 2700K WT |
| Reference | A3322230WT |
| Color | Textured white |
| RAL | 9005 |
| Category | CEILING RECESSED |

PRODUCT

| | |
|-----------------------------|---------------------------|
| Light source | LED |
| Gross luminous flux | 2050 Lm |
| Power | 17 W |
| Power values of the system | 19,54 W |
| Colour temperature | 2700 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | Mac Adam Step 2 |
| Light beam angle | 38° |
| Lighting efficiency | 93% |
| Efficacy | 121 Lm/W |
| Current intensity | 500 mA |
| Dimming | DALI |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Emergency power supply | Please Consult |
| Electrical insulation class | □ |
| Voltage | 220 V/240 V |
| Frequency | 50/60 Hz |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

OTHER DATA

| | |
|----------------------|---------------------------|
| Ingress Protection | IP20 |
| Recess measurements | Ø62 mm. |
| Swivel angle | 310° |
| Rotation angle | 350° |
| Weight | 443 g. |
| Packaged weight | 555 g. |
| Packaging dimensions | 203 × 180 × 81 mm. |
| Units per package | 1 |
| Materials | Aluminium / Polycarbonate |


CE Pending

Six Recessed is a spotlight for single recessed lighting solutions that stands out for its elegance and airiness. Its body; disk looking, rounded shaped, encloses an innovative combination of reflector and lens. The combined action of both, allows Six to direct light rays with the maximum uniformity in a very small distance that, at the same time, has made possible its differential design-reduced and minimalist-. In addition, Six can be freely articulated due to its airy arm which allows the spotlight to be orientated in any direction.


04-07-19 / 18:00



POLAR DIAGRAM

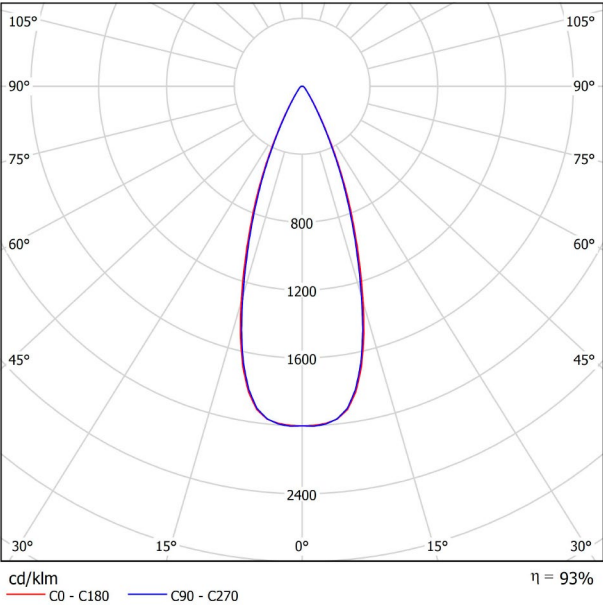



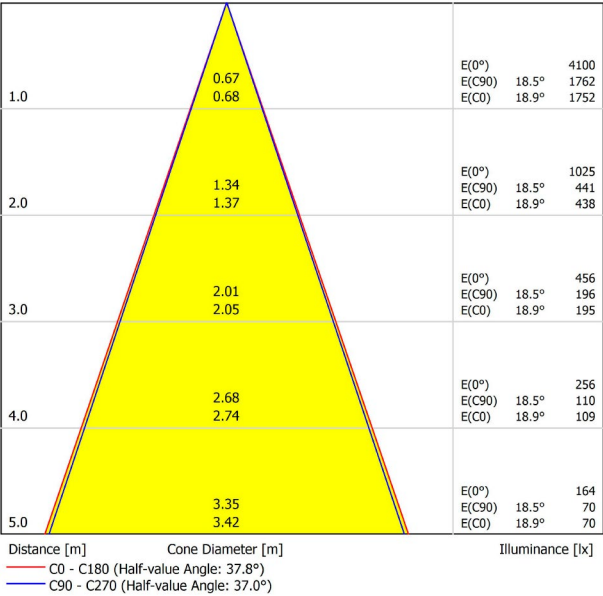





CONICAL DIAGRAM



HIGH CHROMATIC LED

ARKOSLIGHT®

FOR COMMERCIAL PRODUCT SHOWCASING

| Vivid Model Colour Temperature | 2700K | 3000K | 3500K | 4000K | Light Pink |
|---|-------|-------|-------|-------|------------|
|  Reading | | | • | • | |
|  Fruits & Vegetables | | • | • | | |
|  Bakery | • | | | | |
|  Retail | | • | • | | |
|  Cosmetics | | | • | • | |
|  Meat | | | | | • |
|  Fish | | | | • | |
|  Seafood | | | | • | • |



For some of its products, Arkoslight offers the possibility to provide them with a special LED, designed to create an illumination focused on visually promoting goods or products for commercial purposes. It is a high chromaticity LED, capable of identifying the colour shades that produce a positive psychological perception of the illuminated object.

This special LED lighting source offers a much more attractive and intense colour range than a conventional LED, besides being much wider. Technically, this is possible thanks to a special LED setting that includes a «special saturation parameter», capable of highlighting the objects colours and materials in such a way that they seem more attractive within the visible light spectrum. To achieve this performance, in each case, the appropriate diode and specific phosphor coating are carefully selected.