




DIMENSIONS



ACCESSOIRES

ANTI-GLARE HONEYCOMB
LOUVER

TRACK 48V OPTIONS

PRODUIT

Nom	FIT 35 48V DIM DALI 29° 2700K WT
Référence	A3450220WT
Couleur	Blanc Texturé
Puissance du système	9016
Catégorie	TRACKLIGHTS

INFORMATION LUMINEUSE

Source de lumière	LED
Flux lumineux brut	590 Lm
Puissance	5,5 W
Valeurs de puissance du système	6,18 W
Température de couleur	2700 K
Indice de reproduction chromatique	CRI>90
Stabilité chromatique	Mac Adam Step 2
Angle du faisceau lumineux	29°
Efficacité lumineuse	80%
Efficacité	107 Lm/W
Intensité de courant	500 mA
Gradation	DALI
Contrôle par bluetooth	Veuillez consulter
Driver	Inclus
Classe d'isolation électrique	III
Tension	48 Vdc
Efficacité énergétique	A+
Durée de vie de la LED	L80B10 (Tj=85°C) >60.000h

D'AUTRES DONNÉES

Étanchéité	IP20
Angle de basculement	90°
Angle de rotation	360°
Type de rail	Track 48V
Poids	180 g.
Poids avec emballage	250 g.
Dimensions de l'emballage	188 x 165 x 53 mm.
Unités par emballage	1
Matériaux	Aluminium / Polycarbonate



Fit est un projecteur pour applications de rail à basse tension disponible en cinq modèles (Ø50, Ø35, Ø35 Double, Ø20 et Ø20 Double). De géométrie cylindrique et de formes essentielles, il se distingue par son minimalisme esthétique et sa fonctionnalité, car il peut être orienté dans toutes les directions. Le périmètre de sa bouche en noir et son accessoire de type panneau à lamelles d'abeille accentuent sa vocation anti-éblouissante.

DIAGRAMME POLAIRE



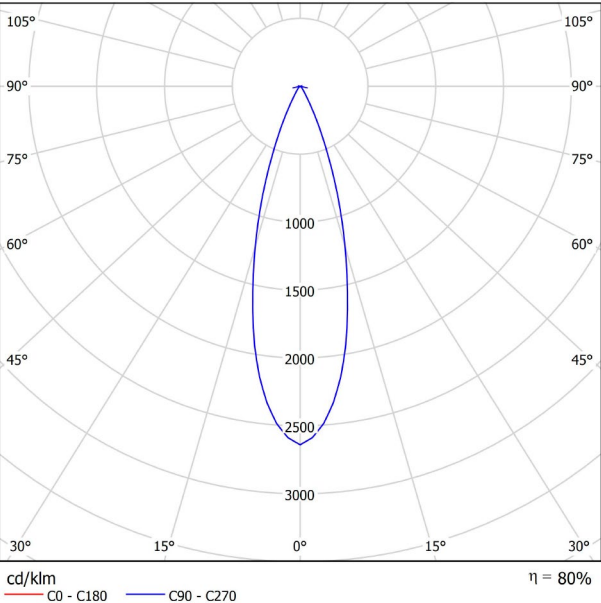


DIAGRAMME CONIQUE



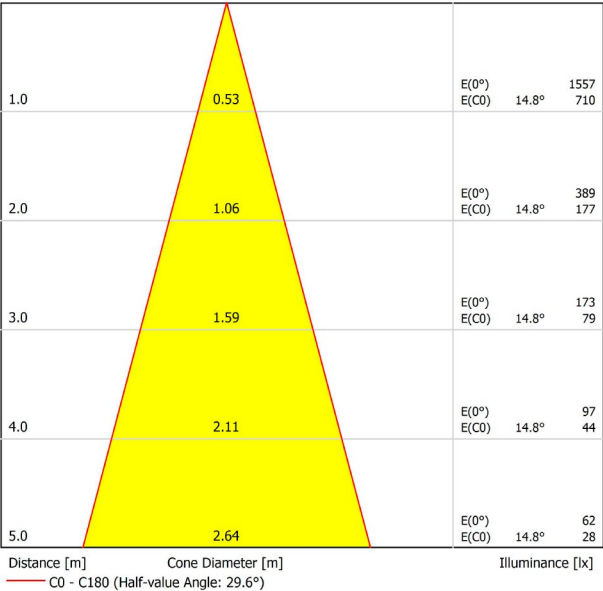

PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories
N'EST PAS VENDU SÉPARÉMENT.	



Accessoire composé d'une grille en nid d'abeille pour réduire l'éblouissement et l'incidence directe des rayons dans la vision.

TRACK 48V TRIMLESS

ARKOSLIGHT®

TRACK 48V SURFACE

Available on request. Please consult.



TRACK 48V 1M	A338-01-00- N
TRACK 48V 2M	A338-02-00- N
TRACK 48V 3M	A338-03-00- N
TRACK 48V Corner 90° One Plane	A338-06-00- N
TRACK 48V Corner 90° Two Planes	A338-07-00- N



			P	I	D
CONSTANT VOLTAGE LED POWER SUPPLY	 NO DIM	0434-01-21	75W	48V	180 x 52 x 30mm
		0434-01-22	150W	48V	240 x 60 x 49mm
	 DALI	0434-01-19	75W	48V	235 x 100 x 31mm
		0434-01-20	150W	48V	235 x 100 x 31mm

CABLE SECTION AND LENGHT BETWEEN TRACK 48V AND POWER SUPPLY

TRACK LENGHT (m)		10			20		29
CABLE LENGHT (m)		1	10	20	1	10	1
POWER (W)	CABLE SECTION (mm²)						
75W	0,75mm²	✓	✓	✓	✓	✓	✓
	1,5mm²	✓	✓	✓	✓	✓	✓
150W	0,75mm²	✓	X	X	✓	X	✓
	1,5mm²	✓	✓	X	✓	✓	✓

COLOUR | N ■ RAL 9005 |

Recommended for installations where the profile can be installed before the false plasteboard ceiling (thickness 12,5mm.)

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com




TRACK 48V TRIMLESS

ARKOSLIGHT®

TRACK 48V SURFACE


Available on request. Please consult.

TRACK 48V 90° CORNER One Plane




*Electrical connection not included

TRACK 48V 90° CORNER Two Planes




*Electrical connection not included




TRACK 48V Live-End Connector

A338-00-01- | N |



TRACK 48V Central Connector

A338-00-02- | N |




TRACK 48V Corner 90° Connector

A338-00-12




TRACK 48V Short T-Bracket

A338-00-03



TRACK 48V Long T-Bracket

A338-00-04



TRACK 48V Straight Joiners (2 Units)

A338-00-05




TRACK 48V End

A338-00-06- | N |



TRACK 48V End Feed

A338-00-07- | N |



TRACK 48V Suspension Kit

A338-00-08

See accessories quantities*



TRACK 48V Clamp for M6 ROD

A338-00-09

See accessories quantities*



TRACK 48V Track Clamp

A338-00-10

See accessories quantities*

* SUGGESTED MOUNTING ACCESSORIES QUANTITIES

1000 mm - 2 Pcs.

2000 mm - 3 Pcs.

3000 mm - 4 Pcs.

COLOUR | N ■ RAL 9005 |

Recommended for installations where the profile can be installed before the false plasteboard ceiling (thickness 12,5mm.)

Calle N · Pol. Ind. EL OLIVERAL

46394 Ribarroja del Turia · Valencia (Spain)

Tel. +34 961 667 207 · Fax +34 961 667 054

info@arkoslight.com · www.arkoslight.com

