




DIMENSIONS



ACCESSORIES

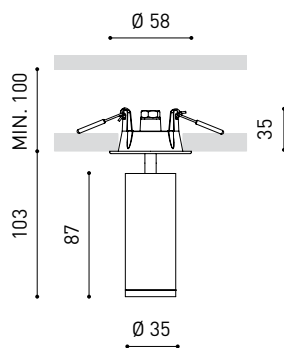

ANTI-GLARE HONEYCOMB LOUVER

Name	FIT 35 RECESSED DIM DALI 29° 3000K WT
Reference	A3452221WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

PRODUCT

FIT 35 RECESSED DIM DALI 29° 3000K WT  
A3452221WT  
Textured white  
9016  
CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	5,5 W
Power values of the system	6,71 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	29°
Lighting efficiency	80%
Efficacy	115 Lm/W
Current intensity	500 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	290 g.
Packaged weight	365 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

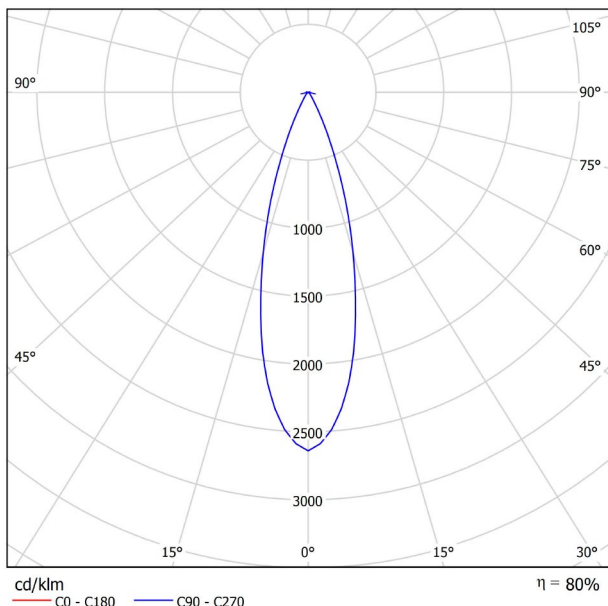

CONICAL DIAGRAM

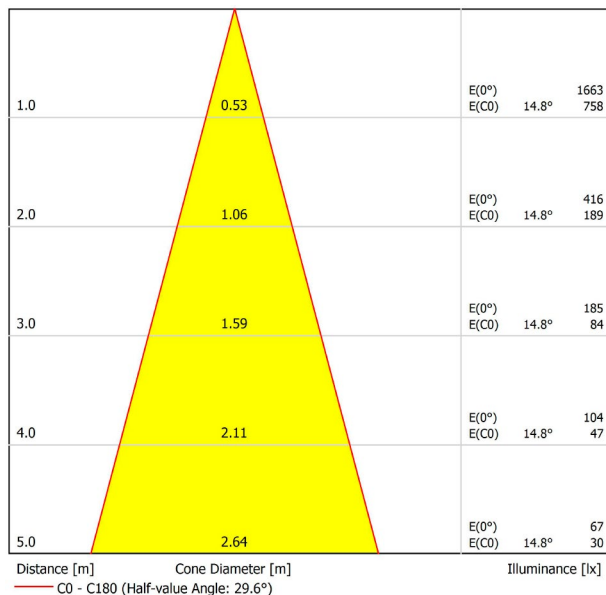



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories

NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.