




DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

Name	FIT 50 RECESSED 47° 2700K NT
Reference	A3462130NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

PRODUCT

FIT 50 RECESSED 47° 2700K NT

A3462130NT

Textured black

9005

CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1040 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	47°
Lighting efficiency	80%
Efficacy	87 Lm/W
Current intensity	1050 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	510 g.
Packaged weight	625 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate




Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

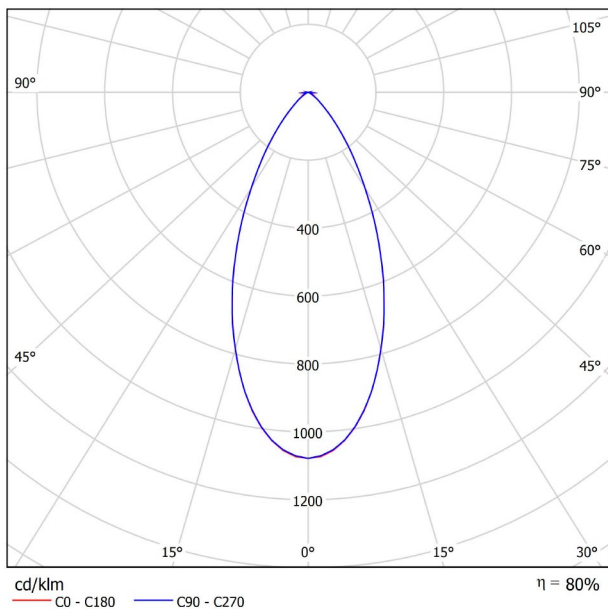

CONICAL DIAGRAM

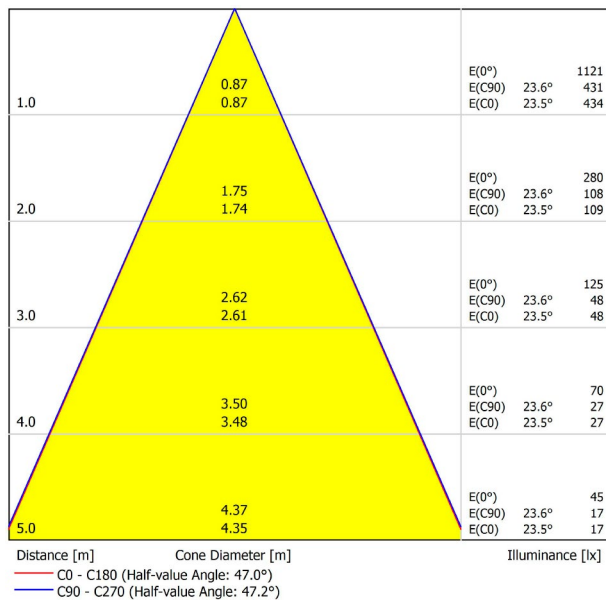



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories

NOT SOLD SEPARATELY.



Accessory made up of louvre in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.