


DIMENSIONS



Name	FIFTY RECESSED 90 DIM DALI/PUSH 4000K NT
Reference	A2310122NT
Color	Textured black
Power of the system	9005
Category	CEILING RECESSED

PRODUCT

LIGHTING INFORMATION

LED

2250 Lm

15,3 W

17,39 W

4000 K

CRI>90

Mac Adam Step 2

102°

70%

147 Lm/W

600 mA

DALI / Push

Please Consult

Included



220 V/240 V

50/60 Hz

A+

L80B10 (Tc=80°C) >60.000h

OTHER DATA

IP20

864 x 58 mm.

Yes

3550 g.

4990 g.

Ø168 x 1020 mm.

1

Aluminium / Polycarbonate




Light source	LED
Gross luminous flux	2250 Lm
Power	15,3 W
Power values of the system	17,39 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	102°
Lighting efficiency	70%
Efficacy	147 Lm/W
Current intensity	600 mA
Dimming	DALI / Push
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h

Ingress Protection	IP20
Recess measurements	864 x 58 mm.
Diffuser included	Yes
Weight	3550 g.
Packaged weight	4990 g.
Packaging dimensions	Ø168 x 1020 mm.
Units per package	1
Materials	Aluminium / Polycarbonate

Fifty is the recessed LED profile of Arkoslight. Fifty, also available in trimless version, it's ideal for longitudinal lighting solutions, where its diffuser contributes to light up in a functional way. On the whole, this profile is capable of assuming the task of highlighting the different lines, volumes or lanes which are defined in the architecture of spaces.

POLAR DIAGRAM

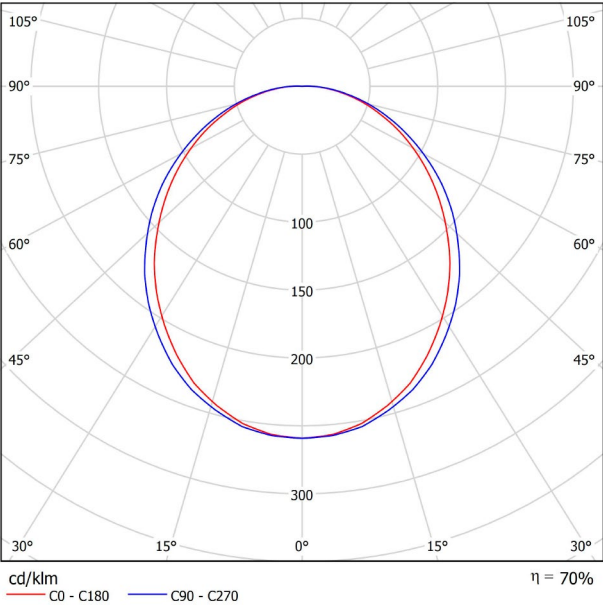

CONICAL DIAGRAM

