




DIMENSIONS



AWARDS




<b>Name</b>	STRAM MINI PRISMATIC 2 DIM 1/10V 4000K WT
<b>Reference</b>	A2370232WT
<b>Color</b>	Textured white
<b>RAL</b>	9016
<b>Category</b>	CEILING RECESSED
<b>PRODUCT</b>	
<b>Light source</b>	LED
<b>Gross luminous flux</b>	1075 Lm
<b>Power</b>	7 W
<b>Power values of the system</b>	7,95 W
<b>Colour temperature</b>	4000 K
<b>Colour Rendering Index</b>	CRI>90
<b>Chromatic stability</b>	Mac Adam Step 2
<b>Light beam angle</b>	87°
<b>Lighting efficiency</b>	80%
<b>Efficacy</b>	168 Lm/W
<b>Current intensity</b>	500 mA
<b>Dimming</b>	1-10V
<b>Control through bluetooth</b>	Please Consult
<b>Driver</b>	Included - Connected
<b>Emergency power supply</b>	Please Consult
<b>Electrical insulation class</b>	<input type="checkbox"/>
<b>Voltage</b>	220 V/240 V
<b>Frequency</b>	50/60 Hz
<b>Energy efficiency</b>	A+
<b>LED lifespan</b>	L80B10 (Tc=80°C) >60.000h
<b>OTHER DATA</b>	
<b>Ingress Protection</b>	IP43/54** - IP 54, please consult
<b>Impact resistance</b>	IK07
<b>Recess measurements</b>	Ø122 mm.
<b>Weight</b>	650 g.
<b>Packaged weight</b>	795,1 g.
<b>Packaging dimensions</b>	203 x 249 x 72 mm.
<b>Units per package</b>	1
<b>Materials</b>	Aluminium / Polymethyl Methacrylate




Ceiling recessed downlight, with a prominent bezel and textured finish, for general lighting functions with diffuse light. Its differentiated aesthetics provide distinction in spaces where it is fitted, considerably different to the traditional round downlight.

POLAR DIAGRAM

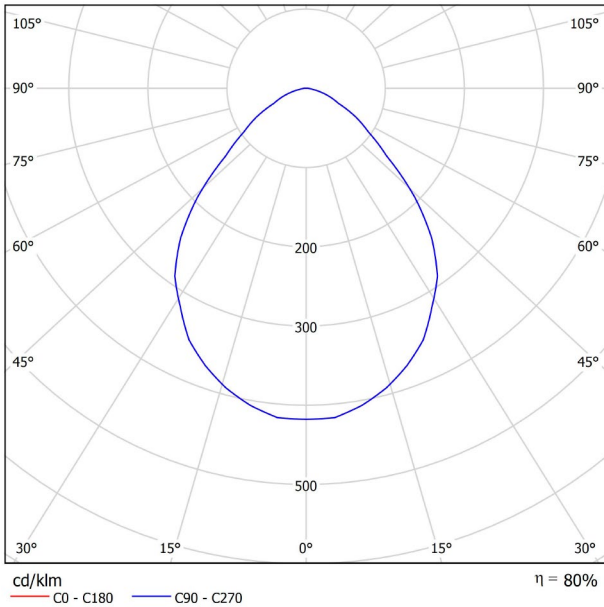

CONICAL DIAGRAM

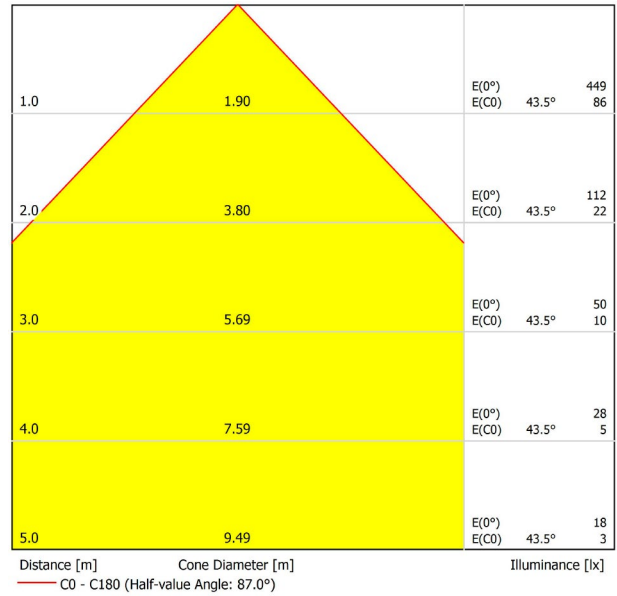

UGR

Glare Evaluation According to UGR											
ρ Ceiling	70	70	50	50	30	70	70	50	50	30	30
ρ Walls	50	30	50	30	30	50	30	50	30	30	20
ρ Floor	20	20	20	20	20	20	20	20	20	20	20
Room Size X Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	21.8	22.9	22.1	23.2	23.4	21.8	22.9	22.1	23.2	23.4
	3H	22.8	23.7	23.1	24.0	24.2	22.8	23.7	23.1	24.0	24.2
	4H	23.1	24.0	23.4	24.3	24.5	23.1	24.0	23.4	24.3	24.5
	6H	23.2	24.1	23.6	24.4	24.7	23.2	24.1	23.6	24.4	24.7
	8H	23.3	24.1	23.6	24.4	24.7	23.3	24.1	23.6	24.4	24.7
4H	12H	23.3	24.0	23.6	24.4	24.7	23.3	24.0	23.6	24.4	24.7
	2H	22.1	23.0	22.4	23.3	23.6	22.1	23.0	22.4	23.3	23.6
	3H	23.2	24.0	23.6	24.3	24.6	23.2	24.0	23.6	24.3	24.6
	4H	23.7	24.3	24.0	24.7	25.0	23.7	24.3	24.0	24.7	25.0
	6H	23.9	24.5	24.3	24.8	25.2	23.9	24.5	24.3	24.8	25.2
8H	8H	23.9	24.5	24.4	24.9	25.3	23.9	24.5	24.4	24.9	25.3
	12H	24.0	24.5	24.4	24.9	25.3	24.0	24.5	24.4	24.9	25.3
	4H	23.8	24.3	24.2	24.7	25.1	23.8	24.3	24.2	24.7	25.1
	6H	24.1	24.5	24.5	24.9	25.4	24.1	24.5	24.5	24.9	25.4
	8H	24.2	24.6	24.7	25.0	25.5	24.2	24.6	24.7	25.0	25.5
12H	12H	24.2	24.6	24.7	25.0	25.5	24.2	24.6	24.7	25.0	25.5
	4H	23.8	24.2	24.2	24.7	25.1	23.8	24.2	24.2	24.7	25.1
	6H	24.1	24.5	24.6	24.9	25.4	24.1	24.5	24.6	24.9	25.4
8H	24.2	24.5	24.7	25.0	25.5	24.2	24.5	24.7	25.0	25.5	
Variation of the observer position for the luminaire distances S											
S = 1.0H	+0.5 / -0.7					+0.5 / -0.7					
S = 1.5H	+1.0 / -1.4					+1.0 / -1.4					
S = 2.0H	+2.1 / -2.2					+2.1 / -2.2					
Standard table	BK03					BK03					
Correction Summand	6.4					6.4					
Corrected Glare Indices referring to 1075lm Total Luminous Flux											