




DIMENSIONS



AWARDS



Name	STRAM MINI PRISMATIC 2 DIM DALI 3000K WT
Reference	A2370241WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

PRODUCT


LIGHTING INFORMATION

OTHER DATA




Ceiling recessed downlight, with a prominent bezel and textured finish, for general lighting functions with diffuse light. Its differentiated aesthetics provide distinction in spaces where it is fitted, considerably different to the traditional round downlight.

POLAR DIAGRAM

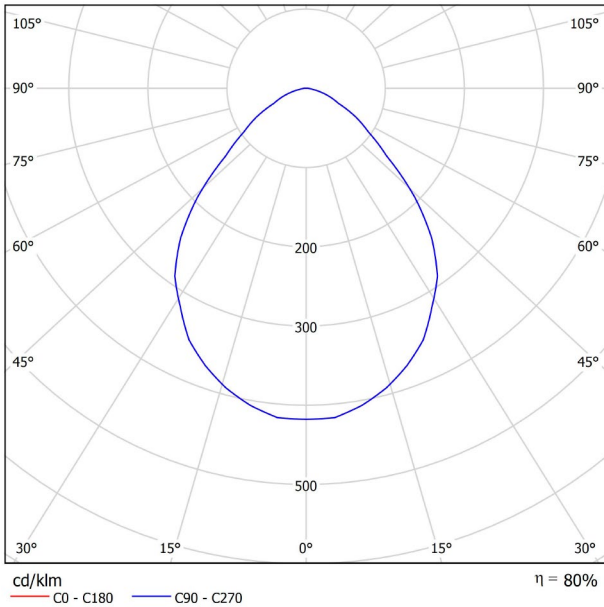

CONICAL DIAGRAM

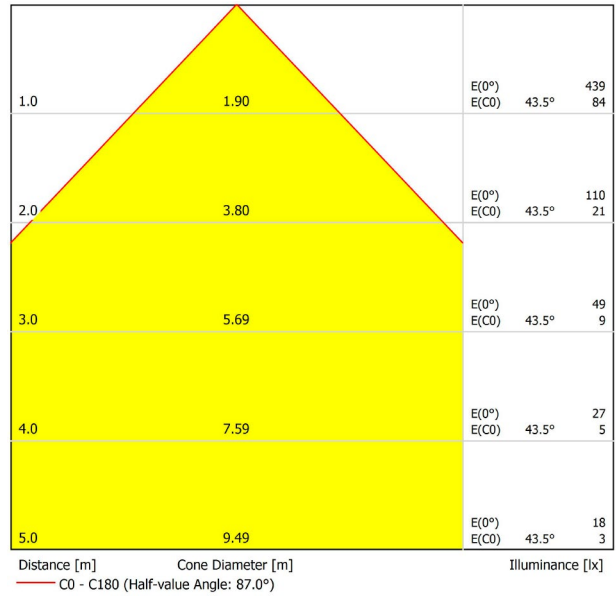

UGR

Glare Evaluation According to UGR												
ρ Ceiling	70	70	50	50	30	70	70	50	50	30		
ρ Walls	50	30	50	30	30	50	30	50	30	30		
ρ Floor	20	20	20	20	20	20	20	20	20	20		
Room Size	X	Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	2H	21.8	22.9	22.0	23.1	23.3	21.8	22.9	22.0	23.1	23.3
	3H	3H	22.7	23.7	23.0	23.9	24.2	22.7	23.7	23.0	23.9	24.2
	4H	4H	23.0	23.9	23.3	24.2	24.5	23.0	23.9	23.3	24.2	24.5
	6H	6H	23.2	24.0	23.5	24.3	24.6	23.2	24.0	23.5	24.3	24.6
	8H	8H	23.2	24.0	23.5	24.3	24.6	23.2	24.0	23.5	24.3	24.6
4H	12H	12H	23.2	24.0	23.6	24.3	24.6	23.2	24.0	23.6	24.3	24.6
	2H	2H	22.0	22.9	22.3	23.2	23.5	22.0	22.9	22.3	23.2	23.5
	3H	3H	23.1	23.9	23.5	24.2	24.6	23.1	23.9	23.5	24.2	24.6
	4H	4H	23.6	24.2	24.0	24.6	25.0	23.6	24.2	24.0	24.6	25.0
	6H	6H	23.8	24.4	24.2	24.8	25.2	23.8	24.4	24.2	24.8	25.2
8H	8H	8H	23.9	24.4	24.3	24.8	25.2	23.9	24.4	24.3	24.8	25.2
	12H	12H	23.9	24.4	24.3	24.8	25.2	23.9	24.4	24.3	24.8	25.2
	4H	4H	23.7	24.2	24.1	24.6	25.0	23.7	24.2	24.1	24.6	25.0
	6H	6H	24.0	24.4	24.5	24.9	25.3	24.0	24.4	24.5	24.9	25.3
	8H	8H	24.1	24.5	24.6	24.9	25.4	24.1	24.5	24.6	24.9	25.4
12H	12H	12H	24.2	24.5	24.7	25.0	25.5	24.2	24.5	24.7	25.0	25.5
	4H	4H	23.7	24.2	24.1	24.6	25.0	23.7	24.2	24.1	24.6	25.0
	6H	6H	24.0	24.4	24.5	24.8	25.3	24.0	24.4	24.5	24.8	25.3
8H	8H	24.1	24.4	24.6	24.9	25.4	24.1	24.4	24.6	24.9	25.4	
Variation of the observer position for the luminaire distances S												
S = 1.0H	+0.5 / -0.7					+0.5 / -0.7						
S = 1.5H	+1.0 / -1.4					+1.0 / -1.4						
S = 2.0H	+2.1 / -2.2					+2.1 / -2.2						
Standard table	BK03					BK03						
Correction Summand	6.4					6.4						
Corrected Glare Indices referring to 1050lm Total Luminous Flux												