




DIMENSIONS



ACCESSORIES

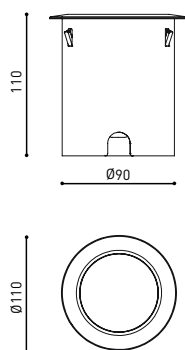

DRIVER OPTIONS

PRODUCT

Name	DARK M 4000K NX
Reference	A3010012NX
Color	Stainless steel
Category	WALL & FLOOR LIGHTS

LIGHTING INFORMATION


Light source	LED
Gross luminous flux	675 / 915 / 1290 Lm
Power	4,6 / 6,7 / 10,5 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	38°
Lighting efficiency	75%
Efficacy	140 Lm/W
Current intensity	140 / 200 / 300 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Excluded
Electrical insulation class	III
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

OTHER DATA

Ingress Protection	IP65
Impact resistance	IK08
Recess measurements	Ø92 mm.
Outdoor Use	Yes
Maximum surface temperature	80°
Supported load	7000 N.
Weight	1075 g.
Packaged weight	1185 g.
Packaging dimensions	155 × 137 × 124 mm.
Units per package	1
Materials	Stainless Steel / Aluminium / Glass-Transparent



Dark is a floor-recessed LED luminaire used together with elements that we wish to illuminate upwards, to be able to highlight their architectonic presence (structures, walls, trees, gardens, cornices, etc.). *** NOTE: Recessed box included



DRIVER OPTIONS*	P	I	
0434-00-36	4,6W	140mA	1 Darks
0434-00-37	6,7W	200mA	1 Darks
0434-00-38	10,5W	300mA	1 Darks

*Higher IP & DIM Drivers please consult

 NO DIM | IP20