




DIMENSIONS



ACCESSORIES

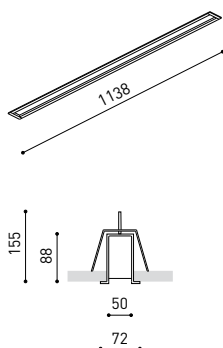

CUSTOM ACCESSORIES  
(MANDATORY)

Name	FIFTY RECESSED CUSTOM 120 4000K WT
Reference	A2311212WT
Color	Textured white
RAL	9016
Category	CUSTOM SYSTEMS

PRODUCT

FIFTY RECESSED CUSTOM 120 4000K WT  
A2311212WT  
Textured white  
9016  
CUSTOM SYSTEMS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3000 Lm
Power	20,4 W
Power values of the system	24,00 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	102°
Lighting efficiency	70%
Efficacy	147 Lm/W
Current intensity	600 mA
Control through bluetooth	Please Consult
Driver	Included - Fast Connect
Electrical insulation class	⊕
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h

OTHER DATA

Ingress Protection	IP20
Recess measurements	1148 × 58 mm.
Diffuser included	Yes
Weight	4730 g.
Packaged weight	6440 g.
Packaging dimensions	Ø168 × 1305 mm.
Units per package	1
Materials	Aluminium / Polycarbonate




Fifty Custom, is Arkoslight's profile solution for surface, recessed, suspension or wall applications for lighting projects where a very specific length is required. A tailored suit.

POLAR DIAGRAM



CONICAL DIAGRAM

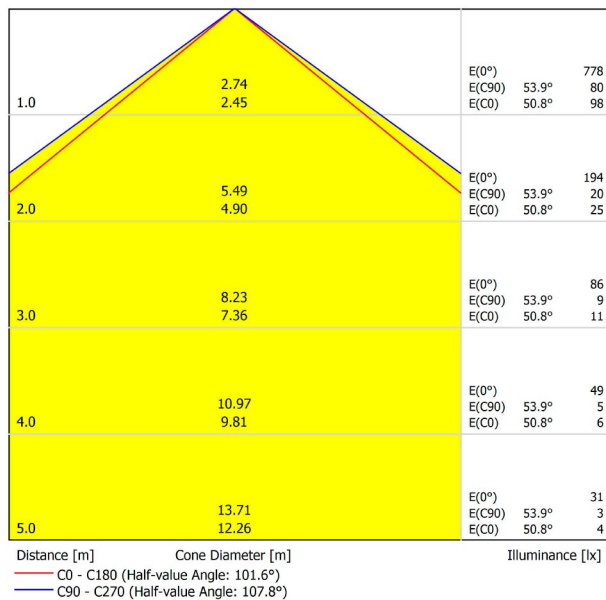

FIFTY 2 End Cap Kit Recessed	1050-00-20-   WT   NT
FIFTY Straight Joiner	1050-01-80
FIFTY Power Line	A231-00-00



COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 |

MATERIAL |  AL |