




DIMENSIONS



AWARDS



Name	POINTER 150mA 5W 37° 2700K W
Reference	A2711110W
Color	Matt white
Power of the system	Colour in the mass looks alike RAL 9010
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	680 Lm
Power	5 W
Power values of the system	6,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	37°
Lighting efficiency	78%
Efficacy	136 Lm/W
Current intensity	150 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø105 mm.
Swivel angle	30°
Rotation angle	355°
Weight	380 g.
Packaged weight	474,5 g.
Packaging dimensions	137 x 137 x 104 mm.
Units per package	1
Materials	Aluminium / Polycarbonate

OTHER DATA



Pointer is a directional LED downlight for recess-mounting applications. With a fine and narrow bezel, it stands out for its minimalist aesthetics, its perfect integration into the ceiling and the possibility of being easily directed towards any angle, as many times as required, just with a very gentle hand motion. Whatever may be the orientation of the adjustable light beam, Pointer always maintains the same aesthetic appearance. An advantage that increases the sensation of visual order of the ceiling and which makes Pointer unique in the market.

POLAR DIAGRAM

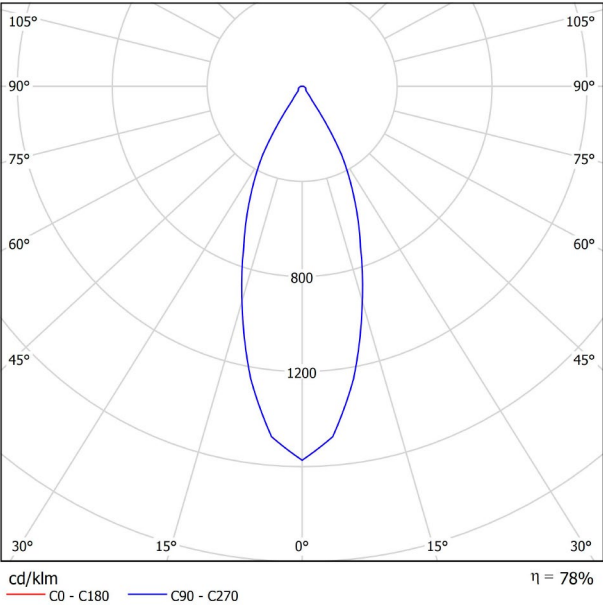

CONICAL DIAGRAM

