




DIMENSIONS



ACCESSORIES

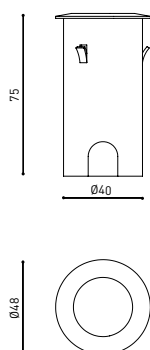

DRIVER OPTIONS

PRODUCT

Name	STEP 2700K NX
Reference	A2750000NX
Color	Stainless steel
Category	WALL & FLOOR LIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	100 Lm
Power	1 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	96°
Lighting efficiency	15%
Efficacy	110 Lm/W
Current intensity	350 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Excluded
Electrical insulation class	III
Energy efficiency	B
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP65
Impact resistance	IK08
Recess measurements	Ø41 mm.
Outdoor Use	Yes
Maximum surface temperature	40°
Supported load	5000 N.
Weight	130 g.
Packaged weight	152 g.
Packaging dimensions	64 × 58 × 91 mm.
Units per package	1
Materials	Stainless Steel / Aluminium / Glass-Transparent





Step is a floor-recessed luminaire for signage functions. Discrete, elegant and functional, it offers the technical features of a leaktight LED luminaire that is able to support weight loads. It is applicable in pedestrian and vehicle transit areas, both outdoors and indoors. Other outstanding features are its small size, low consumption and considerable durability. A technical film, in blue or white finish, on the illuminated Step surface, helps prevent the LED point from being marked and makes the colour more homogeneous. Step can be installed horizontally or vertically. *** NOTE: Recessed box included

POLAR DIAGRAM

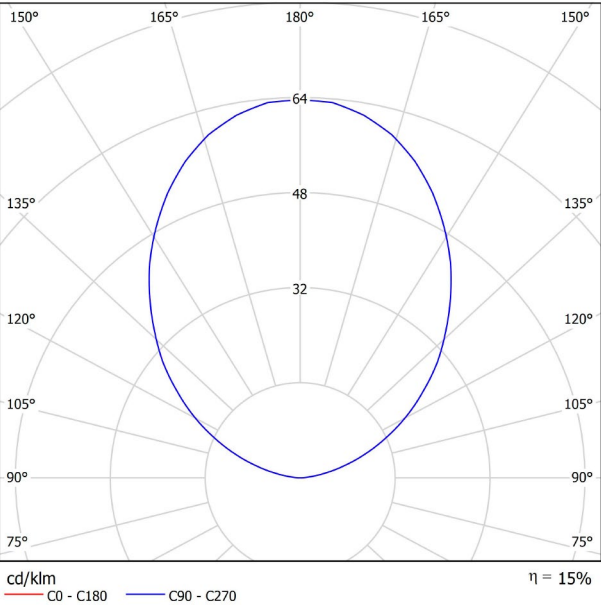

CONICAL DIAGRAM

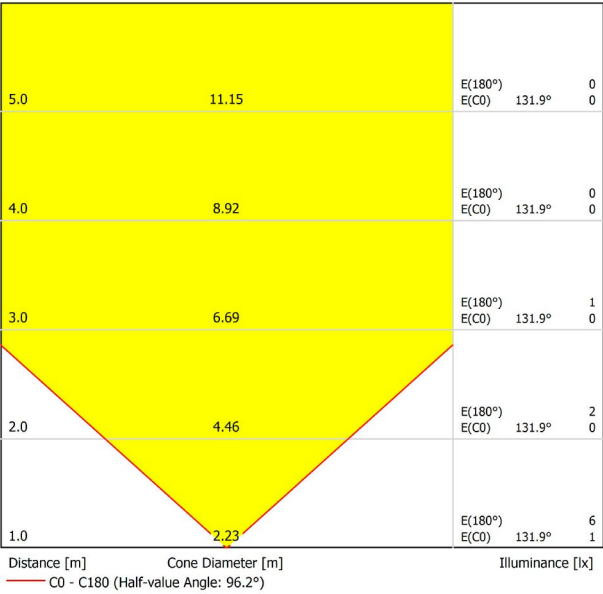



DRIVER OPTIONS*	P	I	
0434-00-39	1W	350mA	1 to 12 Steps

*Higher IP & DIM Drivers please consult

NO DIM | IP20