




## DIMENSIONS



## ACCESSORIES



## DRIVER OPTIONS

## PRODUCT

|           |                     |
|-----------|---------------------|
| Name      | STEP 3000K NX       |
| Reference | A2750001NX          |
| Color     | Stainless steel     |
| Category  | WALL & FLOOR LIGHTS |

## LIGHTING INFORMATION

|                             |                                    |
|-----------------------------|------------------------------------|
| Light source                | LED                                |
| Gross luminous flux         | 120 Lm                             |
| Power                       | 1 W                                |
| Colour temperature          | 3000 K                             |
| Colour Rendering Index      | CRI>90                             |
| Chromatic stability         | Mac Adam Step 3                    |
| Light beam angle            | 96°                                |
| Lighting efficiency         | 15%                                |
| Efficacy                    | 130 Lm/W                           |
| Current intensity           | 350 mA                             |
| Dimming                     | No Dim - Other DIM, please consult |
| Control through bluetooth   | Please Consult                     |
| Driver                      | Excluded                           |
| Electrical insulation class | III                                |
| Energy efficiency           | A                                  |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h          |


## OTHER DATA

|                             |                                                 |
|-----------------------------|-------------------------------------------------|
| Ingress Protection          | IP65                                            |
| Impact resistance           | IK08                                            |
| Recess measurements         | Ø41 mm.                                         |
| Outdoor Use                 | Yes                                             |
| Maximum surface temperature | 40°                                             |
| Supported load              | 5000 N.                                         |
| Weight                      | 130 g.                                          |
| Packaged weight             | 152 g.                                          |
| Packaging dimensions        | 64 × 58 × 91 mm.                                |
| Units per package           | 1                                               |
| Materials                   | Stainless Steel / Aluminium / Glass-Transparent |





Step is a floor-recessed luminaire for signage functions. Discrete, elegant and functional, it offers the technical features of a leaktight LED luminaire that is able to support weight loads. It is applicable in pedestrian and vehicle transit areas, both outdoors and indoors. Other outstanding features are its small size, low consumption and considerable durability. A technical film, in blue or white finish, on the illuminated Step surface, helps prevent the LED point from being marked and makes the colour more homogeneous. Step can be installed horizontally or vertically. \*\*\* NOTE: Recessed box included

POLAR DIAGRAM

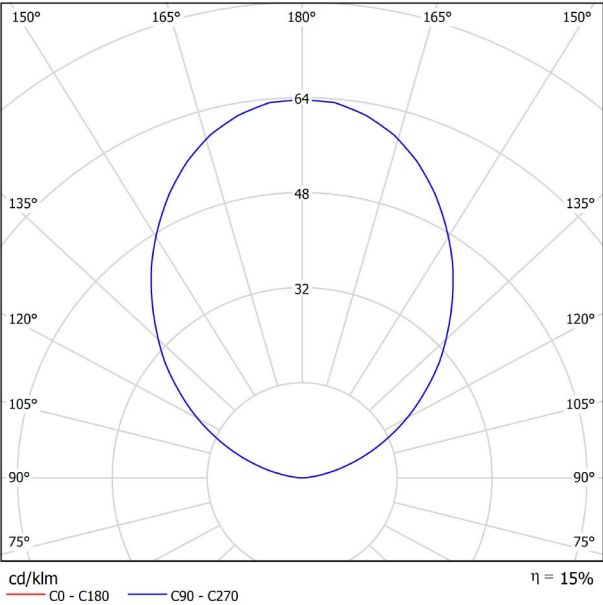

CONICAL DIAGRAM

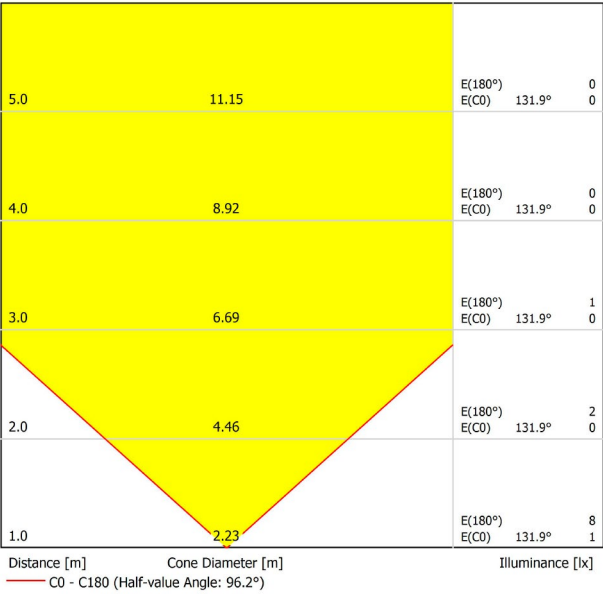



| DRIVER OPTIONS*   | P  | I     |               |
|-------------------|----|-------|---------------|
| <b>0434-00-39</b> | 1W | 350mA | 1 to 12 Steps |

\*Higher IP & DIM Drivers please consult

NO DIM | IP20