



DIMENSIONS



|           |  |
|-----------|--|
| Name      | FIFTY RECESSED 90 DIM DALI/PUSH 4000K NT |
| Reference | A2310122NT                               |
| Color     | Textured black                           |
| RAL       | 9005                                     |
| Category  | CEILING RECESSED                         |

PRODUCT

|           |  |
|-----------|--|
| Name      | FIFTY RECESSED 90 DIM DALI/PUSH 4000K NT |
| Reference | A2310122NT                               |
| Color     | Textured black                           |
| RAL       | 9005                                     |
| Category  | CEILING RECESSED                         |

LIGHTING INFORMATION

|                             |                           |
|-----------------------------|---------------------------|
| Light source                | LED                       |
| Gross luminous flux         | 2250 Lm                   |
| Power                       | 15,3 W                    |
| Power values of the system  | 17,39 W                   |
| Colour temperature          | 4000 K                    |
| Colour Rendering Index      | CRI>90                    |
| Chromatic stability         | Mac Adam Step 2           |
| Light beam angle            | 102°                      |
| Lighting efficiency         | 70%                       |
| Efficacy                    | 147 Lm/W                  |
| Current intensity           | 600 mA                    |
| Dimming                     | DALI / Push               |
| Control through bluetooth   | Please Consult            |
| Driver                      | Included                  |
| Electrical insulation class | ⊕                         |
| Voltage                     | 220 V/240 V               |
| Frequency                   | 50/60 Hz                  |
| Energy efficiency           | A+                        |
| LED lifespan                | L80B10 (Tc=80°C) >60.000h |


OTHER DATA

|                      |                           |
|----------------------|---------------------------|
| Ingress Protection   | IP20                      |
| Recess measurements  | 864 x 58 mm.              |
| Diffuser included    | Yes                       |
| Weight               | 3550 g.                   |
| Packaged weight      | 4990 g.                   |
| Packaging dimensions | Ø168 x 1020 mm.           |
| Units per package    | 1                         |
| Materials            | Aluminium / Polycarbonate |



Fifty is the recessed LED profile of Arkoslight. Fifty, also available in trimless version, it's ideal for longitudinal lighting solutions, where its diffuser contributes to light up in a functional way. On the whole, this profile is capable of assuming the task of highlighting the different lines, volumes or lanes which are defined in the architecture of spaces.

POLAR DIAGRAM

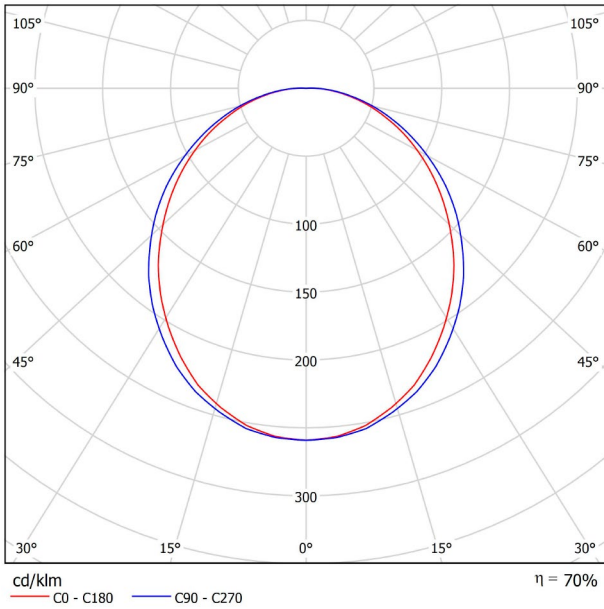

CONICAL DIAGRAM

