




DIMENSIONS



| | |
|-----------|-----------------------------|
| Name | FIFTY RECESSED 120 3000K NT |
| Reference | A2310211NT |
| Color | Textured black |
| RAL | 9006 |
| Category | CEILING RECESSED |

PRODUCT

| | |
|-----------------------------|---------------------------|
| Light source | LED |
| Gross luminous flux | 2920 Lm |
| Power | 20,4 W |
| Power values of the system | 24,00 W |
| Colour temperature | 3000 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | Mac Adam Step 2 |
| Light beam angle | 102° |
| Lighting efficiency | 70% |
| Efficacy | 143 Lm/W |
| Current intensity | 600 mA |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | ⊕ |
| Voltage | 220 V/240 V |
| Frequency | 50/60 Hz |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tc=80°C) >60.000h |

LIGHTING INFORMATION


| | |
|----------------------|---------------------------|
| Ingress Protection | IP20 |
| Recess measurements | 1148 × 58 mm. |
| Diffuser included | Yes |
| Weight | 4730 g. |
| Packaged weight | 6440 g. |
| Packaging dimensions | Ø168 × 1305 mm. |
| Units per package | 1 |
| Materials | Aluminium / Polycarbonate |

OTHER DATA



Fifty is the recessed LED profile of Arkoslight. Fifty, also available in trimless version, it's ideal for longitudinal lighting solutions, where its diffuser contributes to light up in a functional way. On the whole, this profile is capable of assuming the task of highlighting the different lines, volumes or lanes which are defined in the architecture of spaces.

POLAR DIAGRAM

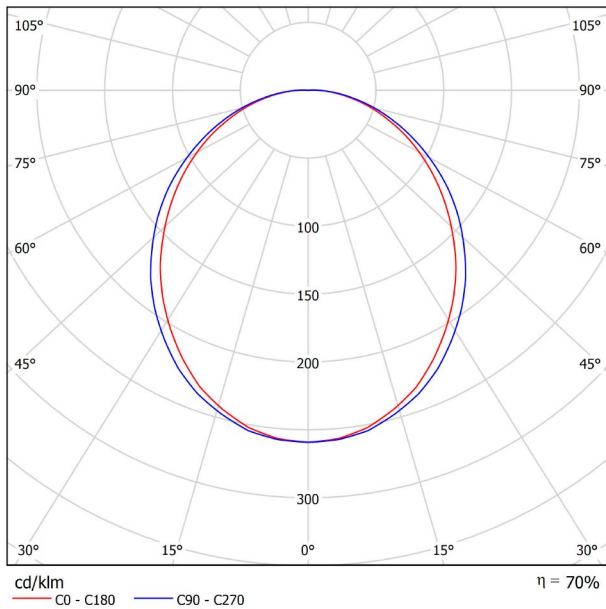

CONICAL DIAGRAM

