



DIMENSIONS



Name	FIFTY RECESSED 120 DIM DALI/PUSH 4000K NT
Reference	A2310222NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

PRODUCT

FIFTY RECESSED 120 DIM DALI/PUSH 4000K NT
 A2310222NT
 Textured black
 9005
 CEILING RECESSED

Light source	LED
Gross luminous flux	3000 Lm
Power	20,4 W
Power values of the system	23,18 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	102°
Lighting efficiency	70%
Efficacy	147 Lm/W
Current intensity	600 mA
Dimming	DALI / Push
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	⊕
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h

LIGHTING INFORMATION

LED
 3000 Lm
 20,4 W
 23,18 W
 4000 K
 CRI>90
 Mac Adam Step 2
 102°
 70%
 147 Lm/W
 600 mA
 DALI / Push
 Please Consult
 Included
 ⊕
 220 V/240 V
 50/60 Hz
 A+
 L80B10 (Tc=80°C) >60.000h

Ingress Protection	IP20
Recess measurements	1148 x 58 mm.
Diffuser included	Yes
Weight	4730 g.
Packaged weight	6440 g.
Packaging dimensions	Ø168 x 1305 mm.
Units per package	1
Materials	Aluminium / Polycarbonate


OTHER DATA

IP20
 1148 x 58 mm.
 Yes
 4730 g.
 6440 g.
 Ø168 x 1305 mm.
 1
 Aluminium / Polycarbonate



Fifty is the recessed LED profile of Arkoslight. Fifty, also available in trimless version, it's ideal for longitudinal lighting solutions, where its diffuser contributes to light up in a functional way. On the whole, this profile is capable of assuming the task of highlighting the different lines, volumes or lanes which are defined in the architecture of spaces.

POLAR DIAGRAM

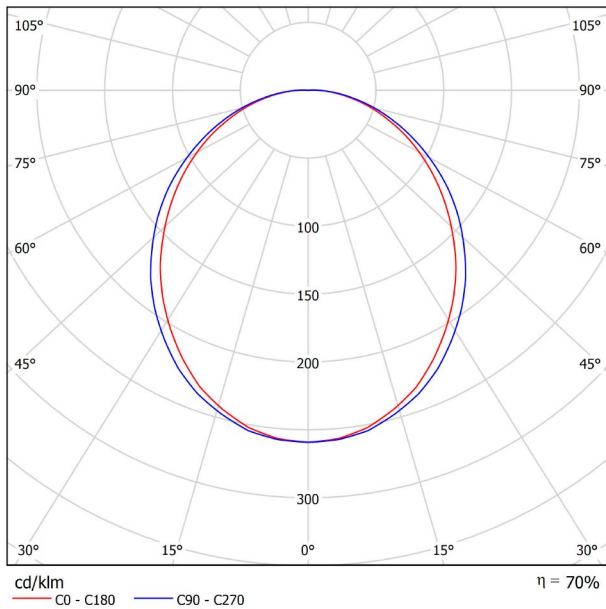

CONICAL DIAGRAM

