



DIMENSIONS



Name	FIFTY RECESSED 150 4000K NT
Reference	A2310312NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

PRODUCT

FIFTY RECESSED 150 4000K NT  
A2310312NT  
Textured black  
9005  
CEILING RECESSED

Light source	LED
Gross luminous flux	3750 Lm
Power	25,5 W
Power values of the system	30,00 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	102°
Lighting efficiency	70%
Efficacy	147 Lm/W
Current intensity	600 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	⊕
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h

LIGHTING INFORMATION

Ingress Protection	IP20
Recess measurements	1432 × 58 mm.
Diffuser included	Yes
Weight	5920 g.
Packaged weight	8170 g.
Packaging dimensions	Ø168 × 1590 mm.
Units per package	1
Materials	Aluminium / Polycarbonate


OTHER DATA

IP20  
1432 × 58 mm.  
Yes  
5920 g.  
8170 g.  
Ø168 × 1590 mm.  
1  
Aluminium / Polycarbonate



Fifty is the recessed LED profile of Arkoslight. Fifty, also available in trimless version, it's ideal for longitudinal lighting solutions, where its diffuser contributes to light up in a functional way. On the whole, this profile is capable of assuming the task of highlighting the different lines, volumes or lanes which are defined in the architecture of spaces.

POLAR DIAGRAM

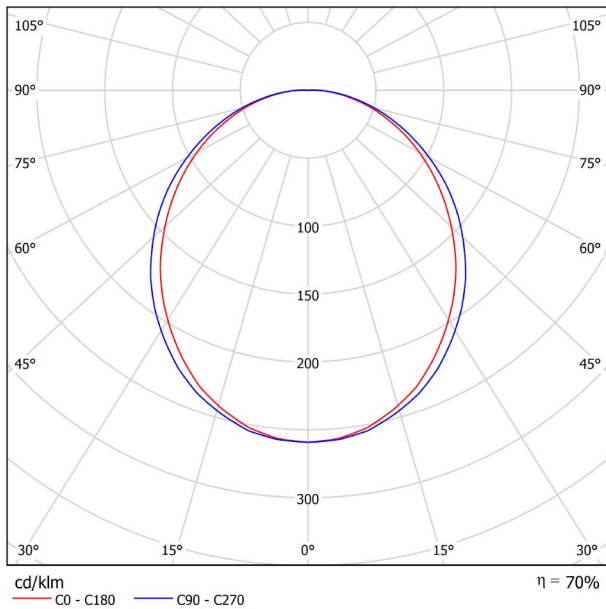

CONICAL DIAGRAM

