




DIMENSIONS




| | |
|-----------------------------|--------------------------------------|
| PRODUCT | |
| Name | FIFTY WALL 90 DIM DALI/PUSH 3000K WT |
| Reference | A2340121WT |
| Color | Textured white |
| RAL | 9016 |
| Category | WALL & FLOOR LIGHTS |
| LIGHTING INFORMATION | |
| Light source | LED |
| Gross luminous flux | 2190 Lm |
| Power | 15,3 W |
| Power values of the system | 17,39 W |
| Colour temperature | 3000 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | Mac Adam Step 2 |
| Light beam angle | 102° |
| Lighting efficiency | 70% |
| Efficacy | 143 Lm/W |
| Current intensity | 600 mA |
| Dimming | DALI / Push |
| Driver | Included |
| Electrical insulation class | ⊕ |
| Voltage | 220 V/240 V |
| Frequency | 50/60 Hz |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tc=80°C) >60.000h |
| OTHER DATA | |
| Ingress Protection | IP20 |
| Diffuser included | Yes |
| Weight | 3550 g. |
| Packaged weight | 4620 g. |
| Packaging dimensions | Ø128 × 1285 mm. |
| Units per package | 1 |
| Materials | Aluminium / Polycarbonate |

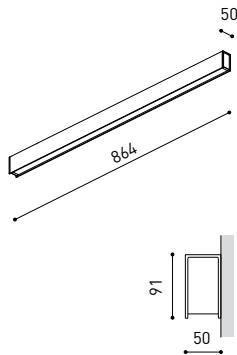

Fifty Wall, is Arkoslight's LED profile for wall applications. With its diffuse and longitudinal lighting it remarks the architectonic structure.

POLAR DIAGRAM

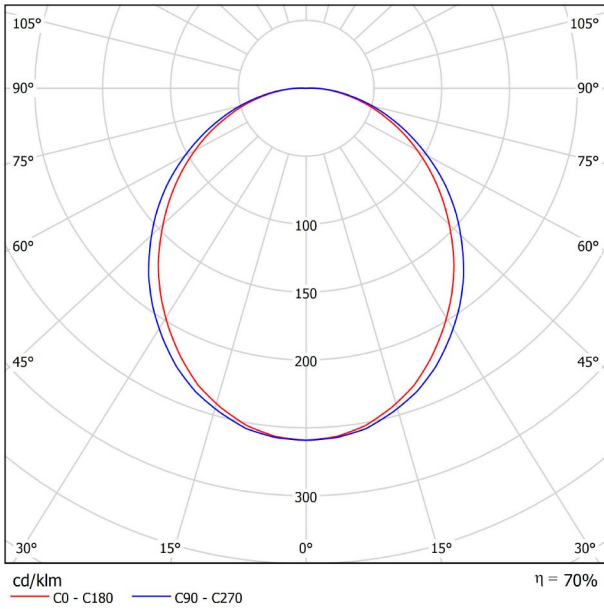

CONICAL DIAGRAM

