




DIMENSIONS

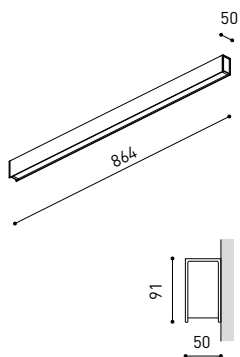

Name	FIFTY WALL 90 DIM DALI/PUSH 4000K NT
Reference	A2340122NT
Color	Textured black
RAL	9005
Category	WALL & FLOOR LIGHTS

PRODUCT

FIFTY WALL 90 DIM DALI/PUSH 4000K NT  
 A2340122NT  
 Textured black  
 9005  
 WALL & FLOOR LIGHTS

Light source	LED
Gross luminous flux	2250 Lm
Power	15,3 W
Power values of the system	17,39 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	102°
Lighting efficiency	70%
Efficacy	147 Lm/W
Current intensity	600 mA
Dimming	DALI / Push
Driver	Included
Electrical insulation class	⊕
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Diffuser included	Yes
Weight	3550 g.
Packaged weight	4620 g.
Packaging dimensions	Ø128 × 1285 mm.
Units per package	1
Materials	Aluminium / Polycarbonate



Fifty Wall, is Arkoslight's LED profile for wall applications. With its diffuse and longitudinal lighting it remarks the architectonic structure.

POLAR DIAGRAM

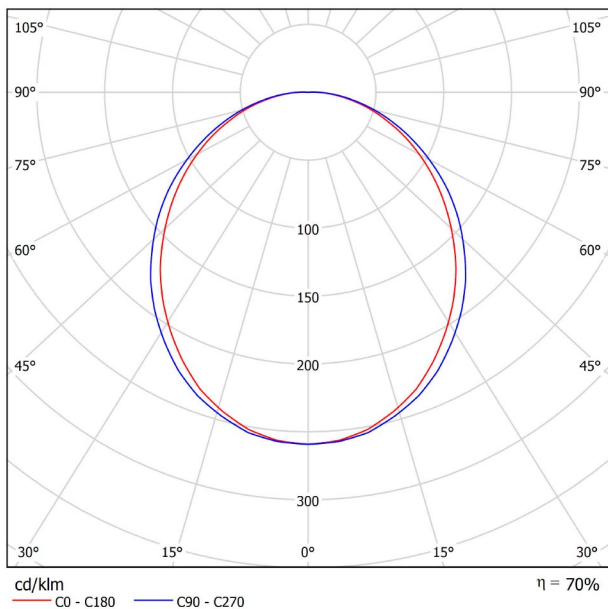

CONICAL DIAGRAM

