




DIMENSIONS




<b>PRODUCT</b>	
Name	FIFTY WALL 150 DIM DALI/PUSH 4000K WT
Reference	A2340322WT
Color	Textured white
RAL	9016
Category	WALL & FLOOR LIGHTS
<b>LIGHTING INFORMATION</b>	
Light source	LED
Gross luminous flux	3750 Lm
Power	25,5 W
Power values of the system	28,98 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	102°
Lighting efficiency	70%
Efficacy	147 Lm/W
Current intensity	600 mA
Dimming	DALI / Push
Driver	Included
Electrical insulation class	⊕
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h
<b>OTHER DATA</b>	
Ingress Protection	IP20
Diffuser included	Yes
Weight	5920 g.
Packaged weight	7635 g.
Packaging dimensions	Ø128 × 1285 mm.
Units per package	1
Materials	Aluminium / Polycarbonate

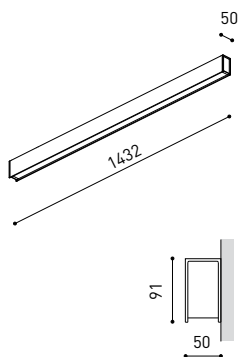

Fifty Wall, is Arkoslight's LED profile for wall applications. With its diffuse and longitudinal lighting it remarks the architectonic structure.

POLAR DIAGRAM

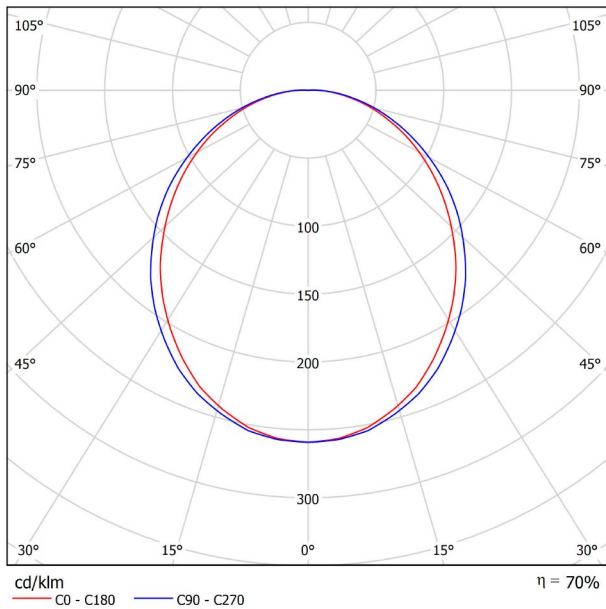

CONICAL DIAGRAM

