




DIMENSIONS



Name	DOT ROUND FIX 200mA 7.5W DIM DALI/PUSH 4000K NS
Reference	A0610232NS
Color	Brushed steel
RAL	Electrolytic bath
Category	CEILING RECESSED

PRODUCT

Name	DOT ROUND FIX 200mA 7.5W DIM DALI/PUSH 4000K NS
Reference	A0610232NS
Color	Brushed steel
RAL	Electrolytic bath
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1030 Lm
Power	7,5 W
Power values of the system	8,52 W
Colour temperature	4000 K
Colour Rendering Index	CRI>80
Chromatic stability	MacAdam Step 2
Light beam angle	38°
Lighting efficiency	92%
Efficacy	137 Lm/W
Current intensity	200 mA
Dimming	DALI / Push - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Fast Connect
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP43
Recess measurements	Ø62 mm.
Weight	220 g.
Packaged weight	365 g.
Packaging dimensions	147 x 104 x 72 mm
Units per package	1
Materials	Aluminium




Discover how an essential luminaire can become a surprising product. For its outstanding performance, design and finishes, Dot is the LED fitting that looks most like a traditional dichroic lamp.

POLAR DIAGRAM

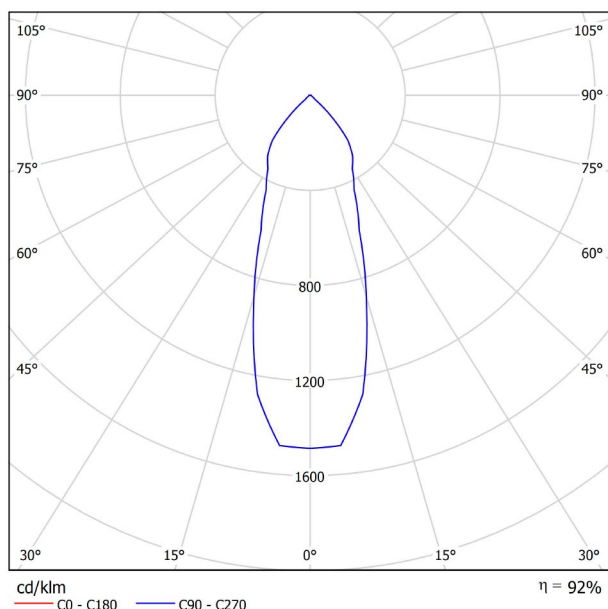

CONICAL DIAGRAM

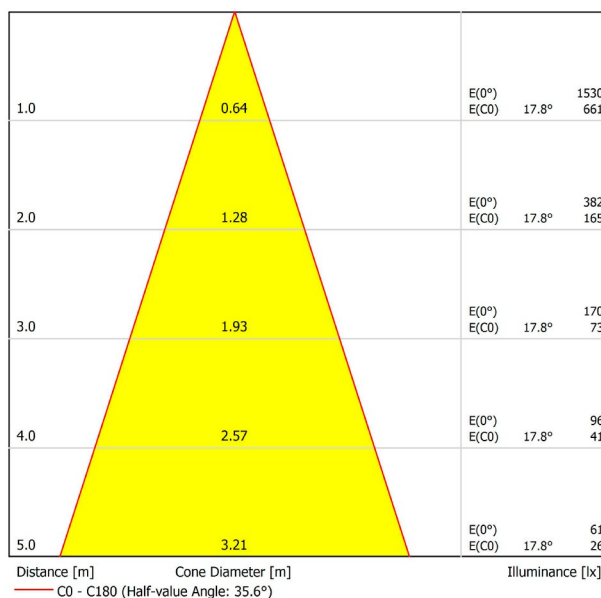

UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	13.3	14.1	13.5	14.3	14.5	13.3	14.1	13.5	14.3	14.5	
	3H	14.4	15.1	14.7	15.3	15.6	14.4	15.1	14.7	15.3	15.6	
	4H	15.1	15.7	15.4	16.0	16.3	15.1	15.7	15.4	16.0	16.3	
	6H	16.1	16.7	16.4	17.0	17.2	16.1	16.7	16.4	17.0	17.2	
	8H	16.7	17.3	17.0	17.6	17.9	16.7	17.3	17.0	17.6	17.9	
4H	12H	17.5	18.1	17.9	18.4	18.7	17.5	18.1	17.9	18.4	18.7	
	2H	13.6	14.2	13.9	14.5	14.8	13.6	14.2	13.9	14.5	14.8	
	3H	15.0	15.5	15.3	15.8	16.1	15.0	15.5	15.3	15.8	16.1	
	4H	15.9	16.4	16.3	16.7	17.1	15.9	16.4	16.3	16.7	17.1	
	6H	17.2	17.6	17.6	17.9	18.3	17.2	17.6	17.6	17.9	18.3	
8H	8H	18.0	18.3	18.4	18.7	19.1	18.0	18.3	18.4	18.7	19.1	
	12H	19.0	19.3	19.4	19.7	20.1	19.0	19.3	19.4	19.7	20.1	
	4H	16.3	16.7	16.7	17.1	17.5	16.3	16.7	16.7	17.1	17.5	
	6H	17.9	18.2	18.4	18.6	19.1	17.9	18.2	18.4	18.6	19.1	
	8H	18.9	19.2	19.4	19.6	20.1	18.9	19.2	19.4	19.6	20.1	
12H	12H	20.2	20.4	20.7	20.8	21.3	20.2	20.4	20.7	20.8	21.3	
	4H	16.4	16.8	16.9	17.2	17.6	16.4	16.8	16.9	17.2	17.6	
	6H	18.1	18.4	18.6	18.8	19.3	18.1	18.4	18.6	18.8	19.3	
	8H	19.3	19.5	19.8	19.9	20.4	19.3	19.5	19.8	19.9	20.4	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+2.2 / -3.6					+2.2 / -3.6					
S = 1.5H		+3.9 / -4.2					+3.9 / -4.2					
S = 2.0H		+5.8 / -4.7					+5.8 / -4.7					
Standard table		BK01					BK01					
Correction Summand		5.2					5.2					
Corrected Glare Indices referring to 1030lm Total Luminous Flux												