




DIMENSIONS



PRODUCT

Name	DOT SQUARE TILT 200mA 7.5W 3000K NS
Reference	A0650211NS
Color	Brushed steel
RAL	Electrolytic bath
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1000 Lm
Power	7,5 W
Power values of the system	9,38 W
Colour temperature	3000 K
Colour Rendering Index	CRI>80
Chromatic stability	MacAdam Step 2
Light beam angle	38°
Lighting efficiency	92%
Efficacy	133 Lm/W
Current intensity	200 mA
Control through bluetooth	Please Consult
Driver	Included - Fast Connect
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø75 mm.
Swivel angle	30°
Weight	185 g.
Packaged weight	265 g.
Packaging dimensions	147 x 104 x 75 mm
Units per package	1
Materials	Aluminium



Discover how an essential luminaire can become a surprising product. For its outstanding performance, design and finishes, Dot is the LED fitting that looks most like a traditional dichroic lamp.

POLAR DIAGRAM

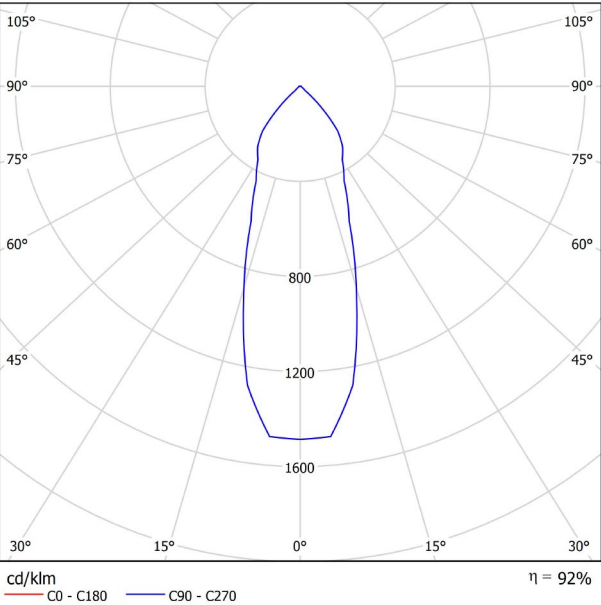

CONICAL DIAGRAM

