




DIMENSIONS



PRODUCT

Name	DOT ROUND TILT D68 200mA 7.5W DIM DALI/PUSH 3000K NS
Reference	A0810231NS
Color	Brushed steel
RAL	Electrolytic bath
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1000 Lm
Power	7,5 W
Power values of the system	8,52 W
Colour temperature	3000 K
Colour Rendering Index	CRI>80
Chromatic stability	MacAdam Step 2
Light beam angle	38°
Lighting efficiency	92%
Efficacy	133 Lm/W
Current intensity	200 mA
Dimming	DALI / Push - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Fast Connect
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø68 mm.
Swivel angle	30°
Weight	250 g.
Packaged weight	395 g.
Packaging dimensions	147 x 75 x 104 mm
Units per package	1
Materials	Aluminium



Discover how an essential luminaire can become a surprising product. For its outstanding performance, design and finishes, Dot is the LED fitting that looks most like a traditional dichroic lamp.

POLAR DIAGRAM

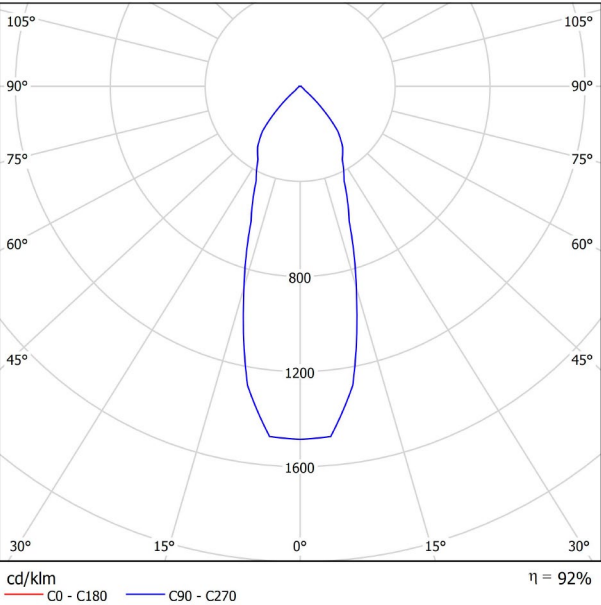

CONICAL DIAGRAM

