




DIMENSIONS



ACCESSORIES

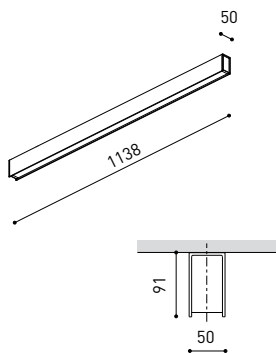

CUSTOM ACCESSORIES

| | |
|-----------|---|
| Name | FIFTY SURFACE CUSTOM 120 DIM DALI/PUSH 3000K NT |
| Reference | A2321221NT |
| Color | Textured black |
| RAL | 9005 |
| Category | CUSTOM SYSTEMS |

PRODUCT

| | |
|-----------|---|
| Name | FIFTY SURFACE CUSTOM 120 DIM DALI/PUSH 3000K NT |
| Reference | A2321221NT |
| Color | Textured black |
| RAL | 9005 |
| Category | CUSTOM SYSTEMS |

LIGHTING INFORMATION

| | |
|-----------------------------|---------------------------|
| Light source | LED |
| Gross luminous flux | 2920 Lm |
| Power | 20,4 W |
| Power values of the system | 23,18 W |
| Colour temperature | 3000 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 102° |
| Lighting efficiency | 70% |
| Efficacy | 143 Lm/W |
| Current intensity | 600 mA |
| Dimming | DALI / Push |
| Control through bluetooth | Please Consult |
| Driver | Included - Fast Connect |
| Electrical insulation class | ⊕ |
| Voltage | 220 V/240 V |
| Frequency | 50/60 Hz |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tc=80°C) >60.000h |


OTHER DATA

| | |
|----------------------|---------------------------|
| Ingress Protection | IP20 |
| Diffuser included | Yes |
| Weight | 4730 g. |
| Packaged weight | 6150 g. |
| Packaging dimensions | Ø128 × 2985 mm |
| Units per package | 1 |
| Materials | Aluminium / Polycarbonate |




Fifty Custom, is Arkoslight's profile solution for surface, recessed, suspension or wall applications for lighting projects where a very specific length is required. A tailored suit.


POLAR DIAGRAM

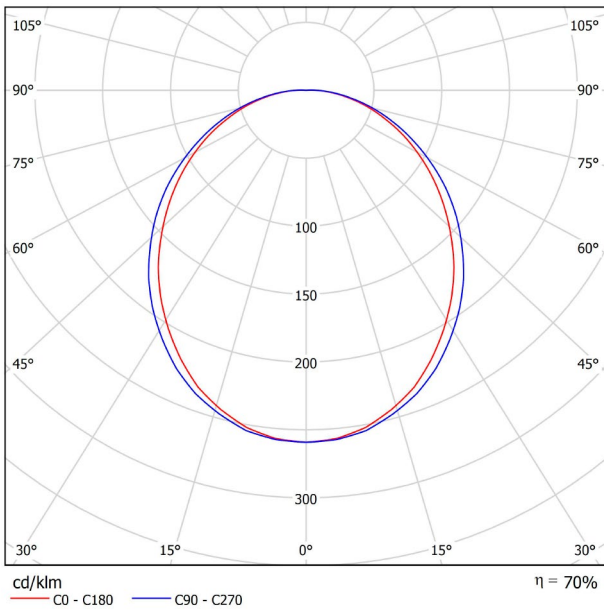

CONICAL DIAGRAM

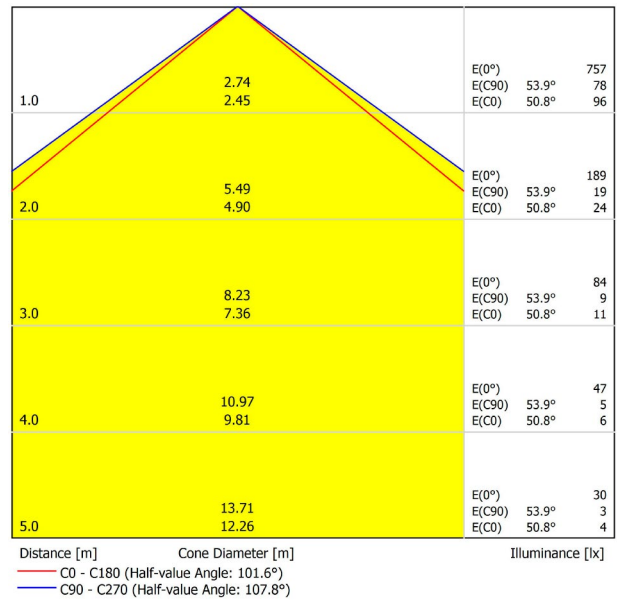

| | |
|-----------------------|-----------------------|
| FIFTY 2 End Cap Kit | 1050-00-10- WT NT |
| FIFTY Straight Joiner | 1050-01-80 |
| FIFTY Power Line | A231-00-00 |

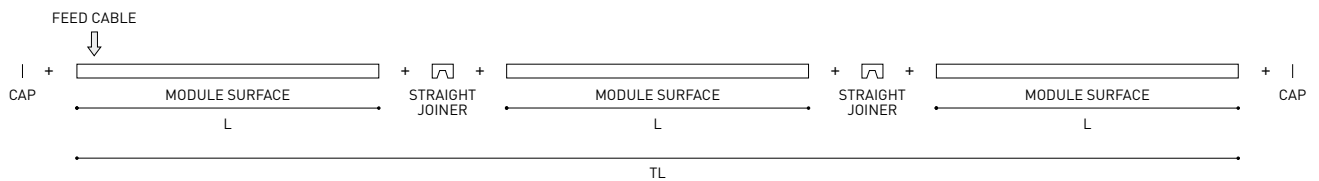

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 |

MATERIAL |  AL |