


PUCK RECESSED

ARKOSLIGHT®



DIMENSIONS



AWARDS



Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

Name	PUCK RECESSED IP54 L DIM DALI/PUSH 4000K WT
Reference	A3142022WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	1640 Lm
Power	12 W
Power values of the system	13,64 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	47°
Lighting efficiency	82%
Efficacy	137 Lm/W
Current intensity	350 mA
Dimming	DALI / Push - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h

LIGHTING INFORMATION

Ingress Protection	IP54
Recess measurements	Ø86 mm.
Weight	516 g.
Packaged weight	580 g.
Packaging dimensions	192 x 161 x 61 mm
Units per package	1
Materials	Aluminium / Optical Glass

OTHER DATA




Puck Recessed is the Puck version for recessed applications. Puck Recessed aims to fulfill the functions of general lighting. Its discreet presence takes the shape of a circular piece, totally made of aluminium, with a slight rounded slant to hold the light source back a few centimetres.


28-03-20 / 00:46



POLAR DIAGRAM

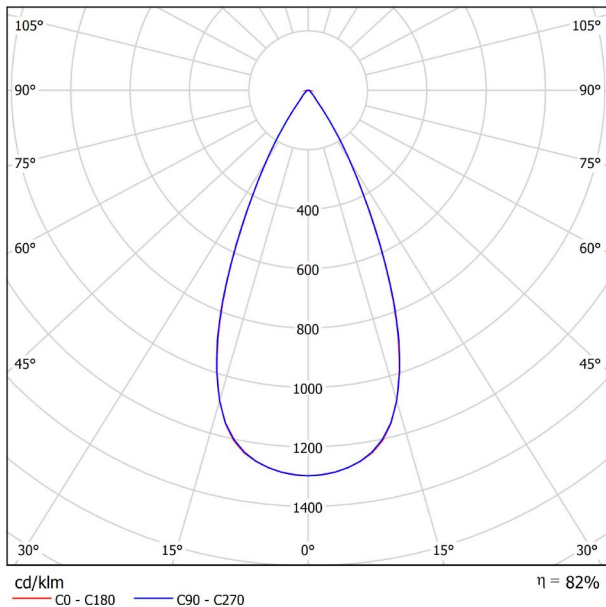

CONICAL DIAGRAM

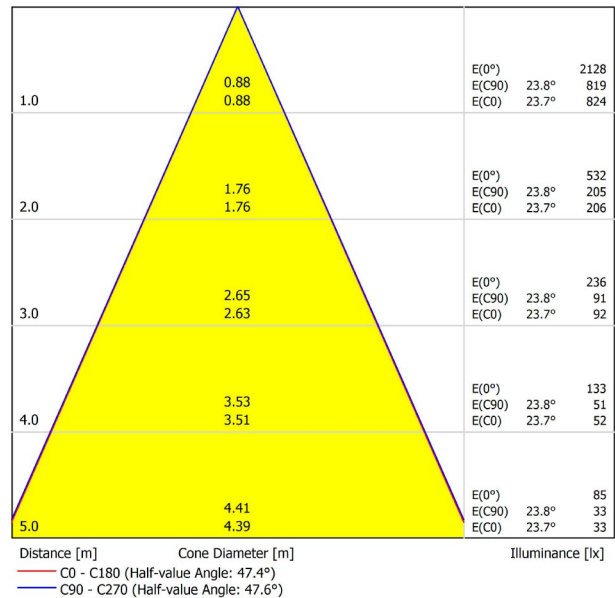

UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	8.2	8.9	8.5	9.1	9.3	7.6	8.3	7.8	8.5	8.7	
	3H	10.6	11.2	10.9	11.5	11.7	10.3	11.0	10.6	11.2	11.4	
	4H	12.1	12.7	12.4	12.9	13.2	11.6	12.2	12.0	12.5	12.8	
	6H	13.0	13.5	13.3	13.8	14.1	12.6	13.1	12.9	13.4	13.7	
	8H	13.5	14.0	13.9	14.3	14.6	13.0	13.5	13.3	13.8	14.1	
4H	12H	14.0	14.5	14.3	14.8	15.1	13.4	13.9	13.7	14.2	14.5	
	2H	8.7	9.3	9.0	9.6	9.8	8.2	8.8	8.5	9.1	9.3	
	3H	11.8	12.3	12.1	12.6	12.9	11.5	12.0	11.9	12.3	12.6	
	4H	13.3	13.8	13.7	14.1	14.4	12.9	13.4	13.3	13.7	14.1	
	6H	14.3	14.7	14.7	15.1	15.4	14.0	14.3	14.4	14.7	15.1	
8H	8H	15.0	15.3	15.4	15.7	16.1	14.5	14.8	14.9	15.2	15.6	
	12H	15.5	15.8	15.9	16.2	16.6	15.0	15.2	15.4	15.6	16.1	
	4H	13.8	14.1	14.2	14.5	14.9	13.5	13.8	13.9	14.2	14.6	
	6H	15.0	15.2	15.5	15.7	16.1	14.7	15.0	15.2	15.4	15.8	
	8H	15.8	16.0	16.2	16.4	16.9	15.4	15.6	15.8	16.0	16.5	
12H	12H	16.4	16.6	16.9	17.1	17.6	16.0	16.1	16.5	16.6	17.1	
	4H	13.9	14.1	14.3	14.5	15.0	13.6	13.9	14.0	14.3	14.7	
	6H	15.2	15.4	15.6	15.8	16.3	14.9	15.1	15.3	15.5	16.0	
	8H	16.0	16.2	16.5	16.6	17.1	15.6	15.8	16.1	16.2	16.7	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+2.7 / -1.1					+2.9 / -1.2					
S = 1.5H		+4.8 / -1.4					+5.0 / -1.6					
S = 2.0H		+6.6 / -1.7					+6.9 / -1.8					
Standard table		BK04					BK04					
Correction Summand		-3.4					-3.5					
Corrected Glare Indices referring to 1640lm Total Luminous Flux												