


BLACK FOSTER SUSPENSION

ARKOSLIGHT®



DIMENSIONS

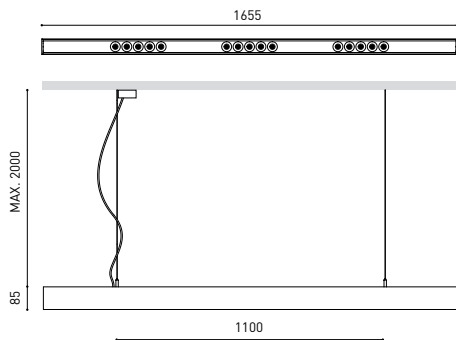

AWARDS



Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

Name	BLACK FOSTER SUSP 1600 38° DIM PUSH 2700K WT
Reference	A3212030WT
Color	Textured white
RAL	9016
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	2850 Lm
Power	31,5 W
Power values of the system	34,62 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	Push
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION

OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	4420 g.
Packaged weight	5840 g.
Packaging dimensions	D145 × 1735 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster Suspension is the product that transfers the claimed effect "The Invisible Black" to a linear suspended system. It is composed by a series of modules which combine light emissions with dark segments. Nevertheless, whether it is On or Off, Black Foster always preserves the aesthetic of a perfect dark line.


28-03-20 / 01:38



POLAR DIAGRAM

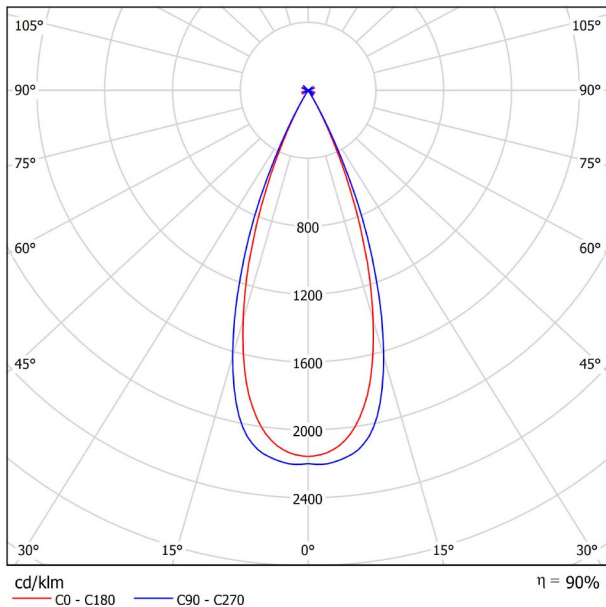

CONICAL DIAGRAM

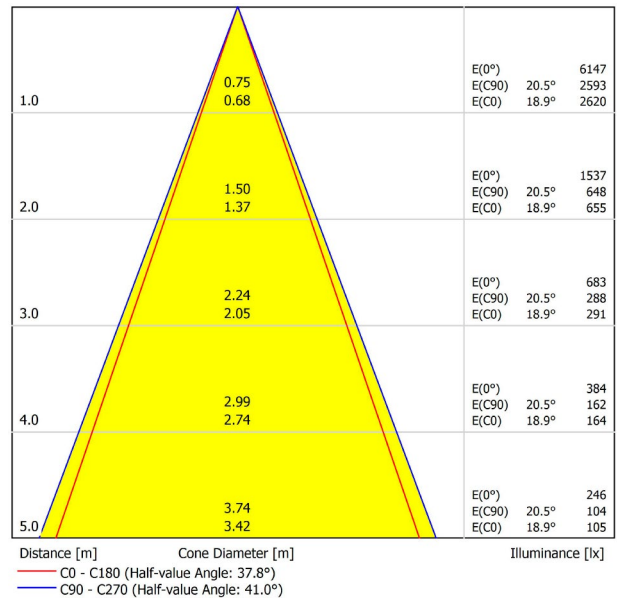

UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-16.0	-15.4	-15.8	-15.2	-15.0	-16.3	-15.6	-16.0	-15.4	-15.3	
	3H	-11.9	-11.3	-11.6	-11.1	-10.8	-14.4	-13.8	-14.1	-13.6	-13.4	
	4H	-11.9	-11.3	-11.6	-11.1	-10.8	-9.9	-9.3	-9.6	-9.1	-8.8	
	6H	-10.5	-10.0	-10.2	-9.8	-9.5	-6.8	-6.3	-6.5	-6.1	-5.8	
	8H	-9.4	-8.9	-9.0	-8.6	-8.3	-6.3	-5.8	-6.0	-5.5	-5.2	
4H	12H	-8.8	-8.3	-8.5	-8.0	-7.7	-6.1	-5.6	-5.7	-5.3	-5.0	
	2H	-13.9	-13.3	-13.6	-13.1	-12.8	-14.0	-13.5	-13.7	-13.2	-13.0	
	3H	-10.8	-10.3	-10.4	-10.0	-9.7	-12.1	-11.7	-11.8	-11.4	-11.1	
	4H	-10.4	-10.0	-10.0	-9.6	-9.3	-8.0	-7.7	-7.7	-7.3	-7.0	
	6H	-8.9	-8.6	-8.5	-8.2	-7.9	-4.5	-4.2	-4.1	-3.8	-3.4	
8H	8H	-7.3	-7.0	-6.8	-6.6	-6.2	-3.9	-3.6	-3.5	-3.2	-2.8	
	12H	-6.8	-6.5	-6.3	-6.1	-5.7	-3.6	-3.3	-3.2	-2.9	-2.5	
	4H	-8.2	-7.9	-7.8	-7.5	-7.1	-6.9	-6.6	-6.5	-6.3	-5.9	
	6H	-6.6	-6.4	-6.1	-5.9	-5.5	-3.1	-2.9	-2.7	-2.5	-2.1	
	8H	-4.8	-4.7	-4.4	-4.2	-3.8	-2.6	-2.4	-2.1	-1.9	-1.5	
12H	12H	-4.5	-4.3	-4.0	-3.9	-3.4	-1.9	-1.8	-1.4	-1.3	-0.8	
	4H	-7.6	-7.4	-7.2	-7.0	-6.6	-6.8	-6.6	-6.4	-6.2	-5.8	
	6H	-5.8	-5.7	-5.4	-5.2	-4.8	-3.0	-2.8	-2.5	-2.4	-1.9	
	8H	-4.3	-4.1	-3.8	-3.7	-3.2	-2.3	-2.2	-1.9	-1.7	-1.2	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+4.3 / -1.8					+2.3 / -0.6					
S = 1.5H		+6.8 / -2.0					+4.2 / -1.0					
S = 2.0H		+8.8 / -2.6					+5.9 / -2.3					
Standard table		---					---					
Correction		---					---					
Summand												
Corrected Glare Indices referring to 2850lm Total Luminous Flux												