




DIMENSIONS



AWARDS



Name	BLACK FOSTER TRI 1 FLOOD 2700K N
Reference	A3181010N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

BLACK FOSTER TRI 1 FLOOD 2700K N

A3181010N

Matt black

9005

CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	90 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	50 × 50 mm.
Weight	115 g.
Packaged weight	170 g.
Packaging dimensions	193 × 108 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

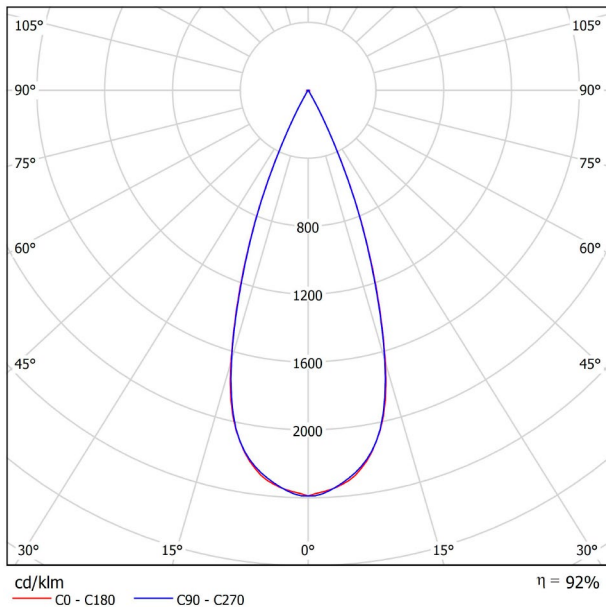

CONICAL DIAGRAM

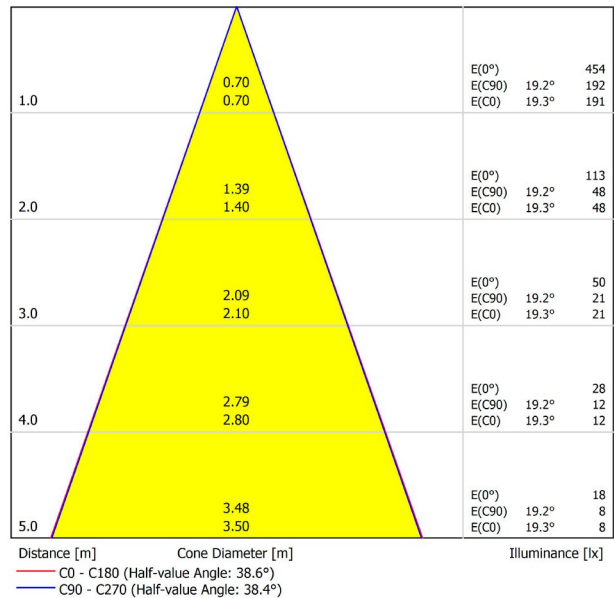

UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30		70	70	50	50	30
ρ Walls		50	30	50	30	30		50	30	50	30	30
ρ Floor		20	20	20	20	20		20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis						Viewing direction parallel to lamp axis				
2H	2H	-6.8	-6.1	-6.5	-5.9	-5.7	-6.8	-6.1	-6.5	-5.9	-5.7	
	3H	-6.9	-6.3	-6.6	-6.1	-5.9	-6.9	-6.3	-6.6	-6.1	-5.9	
	4H	-7.0	-6.4	-6.7	-6.2	-5.9	-7.0	-6.4	-6.7	-6.2	-5.9	
	6H	-7.0	-6.5	-6.7	-6.3	-6.0	-7.0	-6.5	-6.7	-6.3	-6.0	
	8H	-7.1	-6.6	-6.7	-6.3	-6.0	-7.1	-6.6	-6.7	-6.3	-6.0	
4H	12H	-7.1	-6.7	-6.8	-6.4	-6.1	-7.1	-6.7	-6.8	-6.4	-6.1	
	2H	-7.0	-6.4	-6.7	-6.2	-5.9	-7.0	-6.4	-6.7	-6.2	-5.9	
	3H	-7.1	-6.7	-6.8	-6.4	-6.1	-7.1	-6.7	-6.8	-6.4	-6.1	
	4H	-7.2	-6.8	-6.8	-6.5	-6.1	-7.2	-6.8	-6.8	-6.5	-6.1	
	6H	-7.3	-6.9	-6.9	-6.6	-6.2	-7.3	-6.9	-6.9	-6.6	-6.2	
8H	8H	-7.3	-7.0	-6.9	-6.6	-6.2	-7.3	-7.0	-6.9	-6.6	-6.2	
	12H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3	
	4H	-7.3	-7.0	-6.9	-6.6	-6.2	-7.3	-7.0	-6.9	-6.6	-6.2	
	6H	-7.4	-7.2	-6.9	-6.8	-6.3	-7.4	-7.2	-6.9	-6.8	-6.3	
	8H	-7.4	-7.3	-7.0	-6.8	-6.4	-7.4	-7.3	-7.0	-6.8	-6.4	
12H	12H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4	
	4H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3	
	6H	-7.4	-7.3	-7.0	-6.8	-6.4	-7.4	-7.3	-7.0	-6.8	-6.4	
	8H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4	
	Variation of the observer position for the luminaire distances S											
S = 1.0H S = 1.5H S = 2.0H		+0.0 / 0.0 +0.0 / 0.0 +0.0 / 0.0						+0.0 / 0.0 +0.0 / 0.0 +0.0 / 0.0				
Standard table		BK00						BK00				
Correction Summand		-20.0						-20.0				
Corrected Glare Indices referring to 190lm Total Luminous Flux												