

AVAILABLE FOR



SIX



FIT



PLUS



iO



ZEN TUBE



LINE



TOP



HOLLY



SPIN



El nuevo sistema de carril 48Vdc ofrece una enorme versatilidad. Permite dibujar líneas, giros en ángulo recto y cambios de plano en esquinas a 90°. En él, pueden instalarse desde módulos de luz difusa hasta piezas de suspensión o proyectores.


—
The new 48Vdc track system offers a huge versatility. It allows you to draw lines, right angle turns and plane changes in corners at 90°. With this system, you may install diffuse light modules, suspended lighting fixtures or spotlights.

—
Le nouveau système de rails 48Vdc offre une grande polyvalence. Il permet de tracer des lignes, des rotations à angle droit et des changements de plans dans

les angles à 90°. On peut y installer aussi bien des modules de lumière diffuse, que des éléments de suspension ou des projecteurs.

—
Il nuovo sistema a binario a 48 Vdc offre un'enorme versatilità. Permette di disegnare linee, giri ad angolo retto e cambi di piano in angoli a 90°. In esso, possono essere installati da moduli di luce diffusa a parti di sospensione o proiettori.

—
Das neue 48-VDC-Schienensystem bietet eine enorme Vielseitigkeit. Sie können Linien, rechtwinklige Ecken und Ebenenänderungen in 90°-Ecken zeichnen. Darin können sie von diffusen Lichtmodulen bis zu Aufhängeteilen oder Projektoren installiert werden.

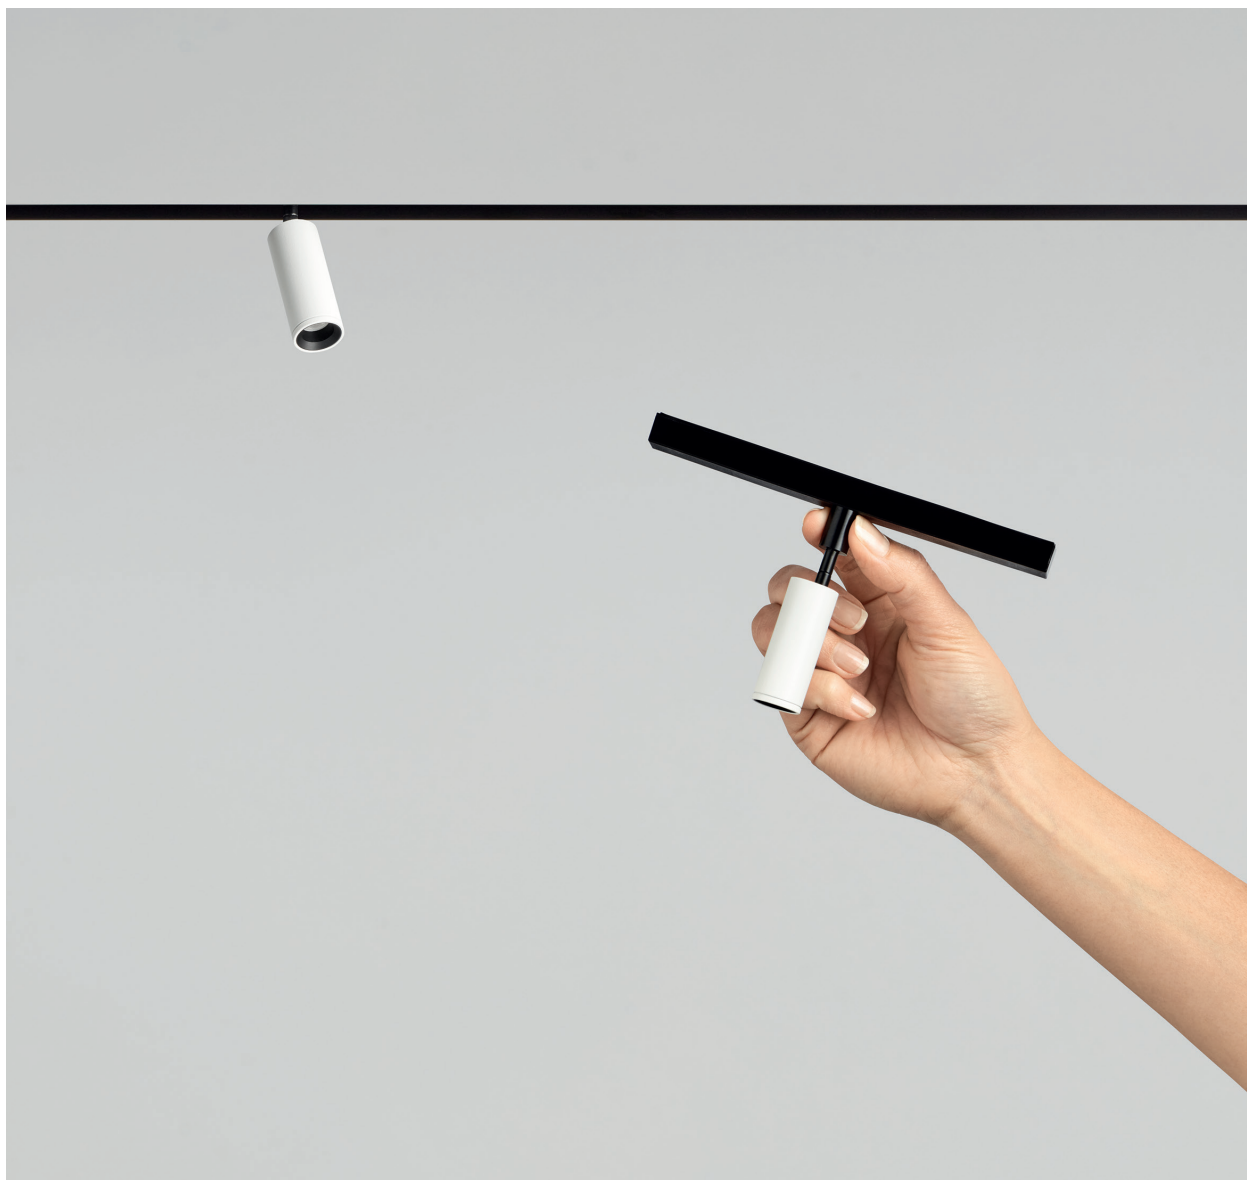

Su sistema de instalación, manual y sin herramientas, es sumamente funcional y sencillo

Its manual and tool-less installation system is highly functional and simple.

Son système d'installation manuelle et sans outils est extrêmement fonctionnel et simple.

Il suo sistema di installazione manuale e senza strumenti è altamente funzionale e semplice.



Das manuelle Installationssystem und ohne Werkzeug ist äusserst funktional und einfach.

TRACK 48V TRIMLESS


ARKOSLIGHT®


TRACK 48V SURFACE

Available on request. Please consult.

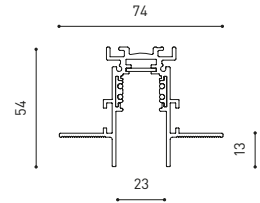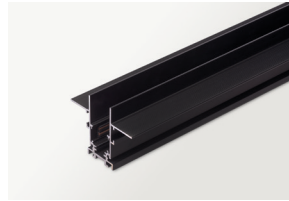

| | |
|---------------------------------|-----------------|
| TRACK 48V 1M | A338-01-00- N |
| TRACK 48V 2M | A338-02-00- N |
| TRACK 48V 3M | A338-03-00- N |
| TRACK 48V Corner 90° One Plane | A338-06-00- N |
| TRACK 48V Corner 90° Two Planes | A338-07-00- N |

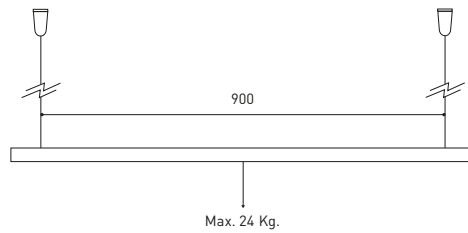

| | | P | I | D |
|--------------------------------------|--|------|-----|-----------------|
| CONSTANT VOLTAGE LED POWER SUPPLY |  0434-01-21 | 75W | 48V | 180 x 52 x 30mm |
| | 0434-01-22 | 150W | 48V | 240 x 60 x 49mm |

CABLE SECTION AND LENGTH BETWEEN TRACK 48V AND POWER SUPPLY

| TRACK LENGTH (m) | | 10 | | | 20 | | 29 |
|------------------|---------------------|----|----|----|----|----|----|
| CABLE LENGTH (m) | | 1 | 10 | 20 | 1 | 10 | 1 |
| POWER (W) | CABLE SECTION (mm²) | | | | | | |
| 75W | 0,75mm² | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | 1,5mm² | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 150W | 0,75mm² | ✓ | ✓ | X | ✓ | ✓ | ✓ |
| | 1,5mm² | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

COLOUR | N ■ RAL 9005 |

Recommended for installations where the profile can be installed before the false plasteboard ceiling (thickness 12,5mm.)


TRACK 48V TRIMLESS

ARKOSLIGHT®

TRACK 48V SURFACE


Available on request. Please consult.

TRACK 48V 90° CORNER One Plane

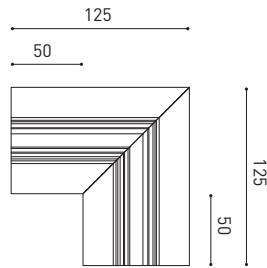


*Electrical connection not included

TRACK 48V 90° CORNER Two Planes

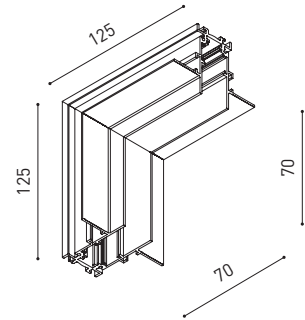

*Electrical connection not included




TRACK 48V Live-End Connector

A338-00-01- | N |



TRACK 48V End

A338-00-06- | N |




TRACK 48V Central Connector

A338-00-02- | N |




TRACK 48V End Feed

A338-00-07- | N |

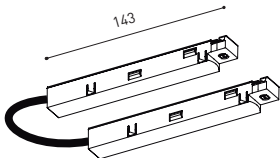

TRACK 48V Corner 90° Connector

A338-00-12



TRACK 48V Suspension Kit

A338-00-08

See accessories quantities*



TRACK 48V Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

See accessories quantities*



TRACK 48V Long T-Bracket


A338-00-04



TRACK 48V Track Clamp

A338-00-10

See accessories quantities*



TRACK 48V Straight Joiners (2 Units)

A338-00-05

* SUGGESTED MOUNTING ACCESSORIES QUANTITIES

1000 mm - 2 Pcs.
2000 mm - 3 Pcs.
3000 mm - 4 Pcs.

COLOUR | N ■ RAL 9005 |

Recommended for installations where the profile can be installed before the false plasteboard ceiling (thickness 12,5mm.)