



**BUDDY**  
**PURPOSEFUL**  
**DESIGN**

ARKOSLIGHT



# Kompakt und leistungsstark

Innovative, hochmoderne LED-Technologie, die äußerst effizient ist. In der Lage, eine Lichtausbeute von bis zu **200lm/W** zu liefern.

Buddy verkörpert die Raffinesse des Downlights mit seinem sorgfältig ausgearbeiteten Design und seinen hochwertigen Oberflächen. Ein kompakter Körper aus Aluminium und präzise Linsen nutzen das volle Potenzial dieser **neuen LED-Generation**.

Mehrere Lichtströme und Leistungsoptionen sind verfügbar, darunter **4W** für **800lm** und **11,5W** für **2120lm**.

# Ein Buddy, viele Optionen

Es gibt zwei Installationsmodi: mit einem **leichten Rahmen** für eine schnelle und effiziente Installation oder **ohne Rahmen** (trimless) für eine vollständig in die Architektur integrierte Installation.

Außerdem gibt es zwei zusätzliche Varianten: **fest** oder **schwenkbar**. Seine schwenkbare Version ist vollständig ausrichtbar und äußerst funktional. Dank seiner Schwenk- und Drehmöglichkeiten können wir nach der Installation mit einer einfachen manuellen Einstellung die Ausrichtung ändern.

Auch in verschiedenen Ausführungen erhältlich.





# Wasserdicht und robust

Dank seiner hohen **IP54-Schutzklasse** ist Buddy selbst in seiner schwenkbaren Version außergewöhnlich beständig gegen das Eindringen von Staubpartikeln und Wasser.




# Beleuchtungs- freiheit, Nut- zungsfreiheit

Die Buddy-Familie bietet außergewöhnliche Vielseitigkeit mit drei Lichtstrahlöffnungsoptionen: **Spot / Medium / Flood** / sowie einer **Super Spot-Version mit 12° / 13°**.

Dies macht es zu einem anpassungsfähigen Downlight, ideal für die Abdeckung sowohl von allgemeinen Beleuchtungsbedürfnissen als auch von Akzentbeleuchtung.

Außerdem ist Buddy äußerst technisch. Dank seiner LED, hochwertigen Linsen und blendfreien Bildschirms kann es einen gleichmäßigen Lichtstrom und komfortable Blendungsniveaus gewährleisten und so eine optimale Beleuchtungserfahrung in jeder Umgebung sicherstellen.

## BUDDY / BUDDY L

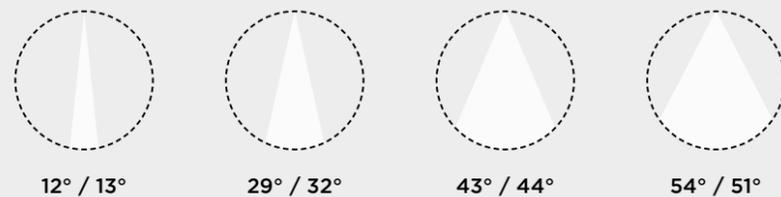

## BUDDY / BUDDY L TUNABLE WHITE



# Buddy Super Spot

Sehr kontrollierte Lichtstrahlöffnung (12° / 13°). Konzipiert für den Einsatz als Akzentbeleuchtung, bietet der Buddy Super Spot auch einen gleichmäßigen Lichtstrom und ein deutliches visuelles Komfortgefühl.




# Buddy Wall Washer

Der Vorteil des Buddy-Wandfluters liegt in seinem optischen System, das als Alternative zur asymmetrischen Projektion der verstellbaren Einbauleuchte eine gleichmäßige vertikale Lichtverteilung ohne Unterbrechungen oder Intensitätsänderungen ermöglicht, sowie keine Unterbrechungen oder Änderungen der Lichtstärke hervorruft. Erhältlich als Einbau- und rahmenlose Version und mit „Tunable White“-Technologie, die eine Anpassung der Intensität und Farbtemperatur ermöglicht.






100% flux - 3000K

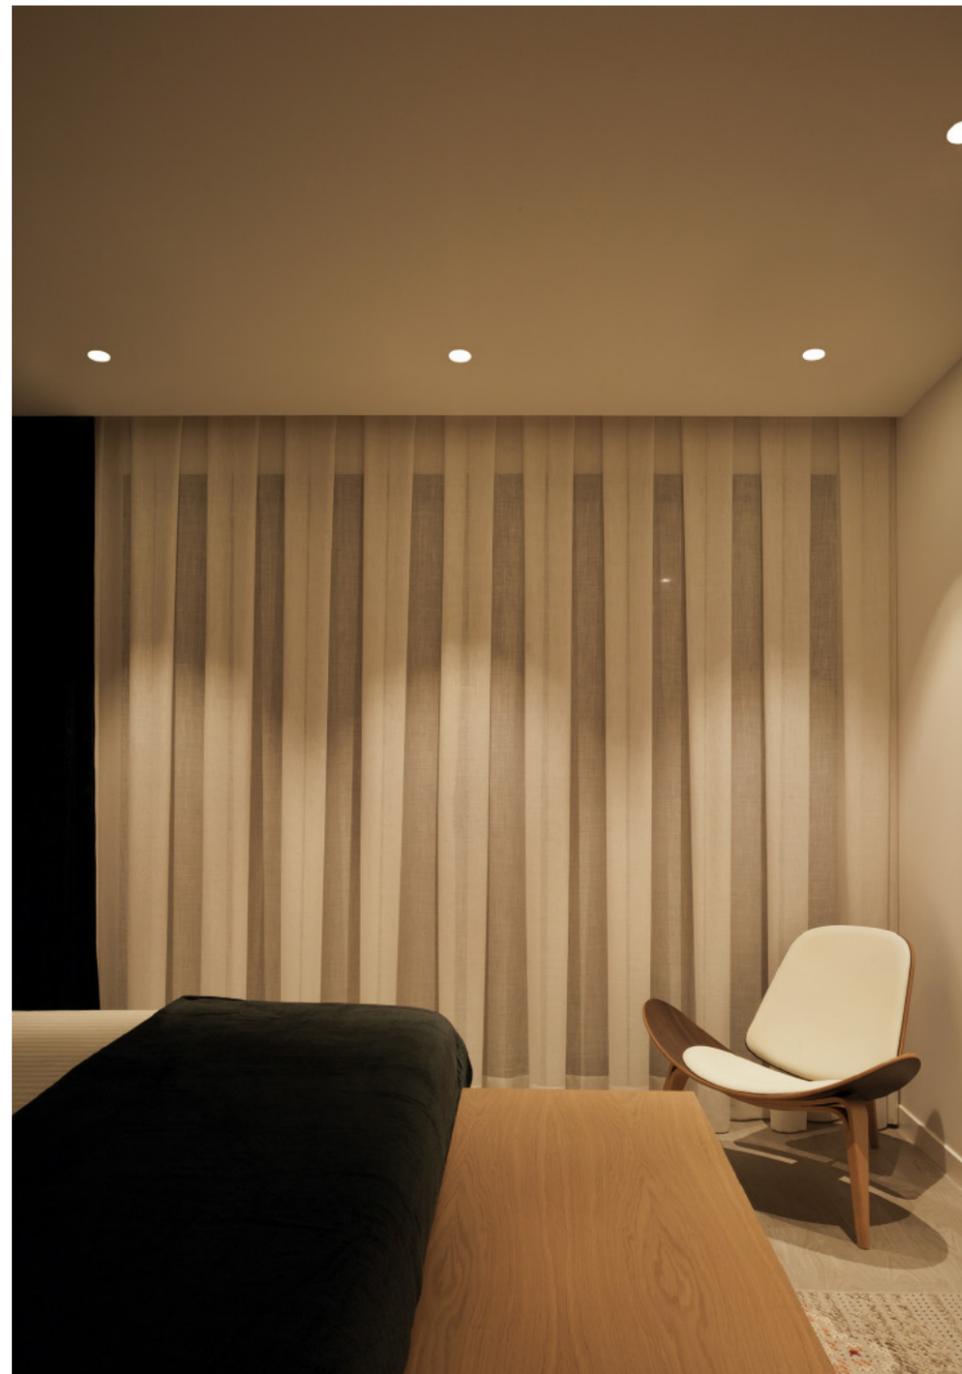

50% flux - 2400K

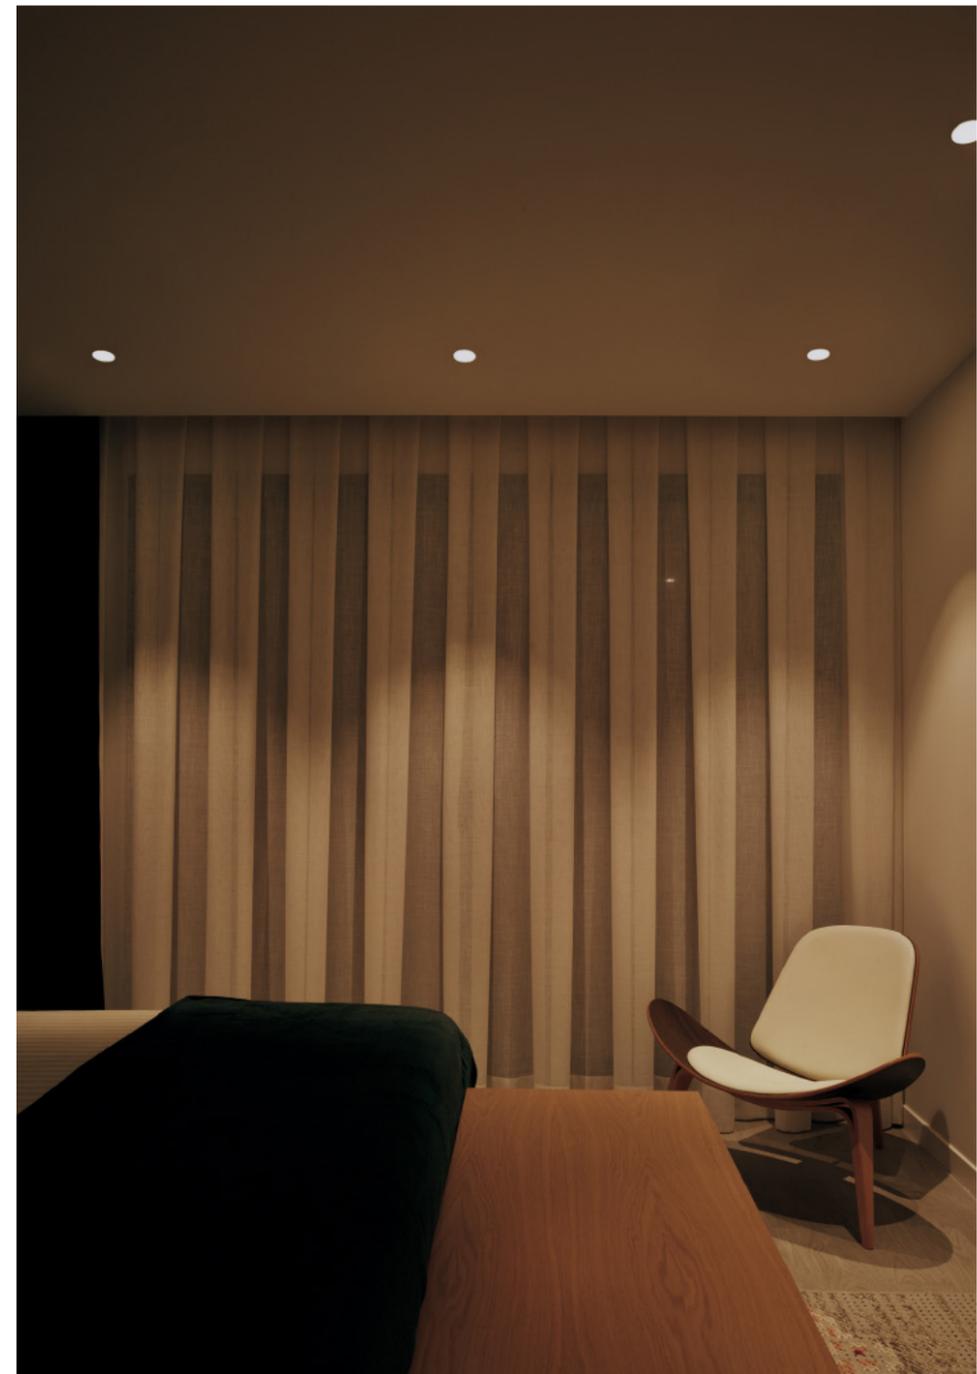

5% flux - 1800K

# DIM to warm

Für Tageszeiten, in denen erhöhte Aktivierung und Biorhythmus angestrebt werden, ist kaltes und helles Licht geeignet. Im Gegensatz dazu sind in Stunden, in denen Deaktivierung und Entspannung angestrebt werden, sind eine warme Lichttemperatur und nur das notwendigste Licht erwünscht.

# Tunable white


Buddy Tunable White ermöglicht eine unabhängige Einstellung der Farbtemperatur und Lichtintensität, was eine vollständige Flexibilität und die Reproduktion des natürlichen Lichts im Laufe des Tages ermöglicht. Diese Technologie trägt zum psychologischen Komfort und Wohlbefinden der Menschen bei.




**BUDDY**  
TECHNISCHE  
SPEZIFIKATIONEN




# VERSIONEN



BUDDY



BUDDY TRIMLESS



BUDDY TILT



BUDDY TILT TRIMLESS



BUDDY WALL WASHER



BUDDY WALL WASHER TRIMLESS



BUDDY L



BUDDY L TRIMLESS



BUDDY L TILT



BUDDY L TILT TRIMLESS

# OBERFLÄCHEN



W



W



W



W



N




N




N



N




WG



G



WN



NG



WN



# BUDDY

		CCT	Beam	LOR
BUDDY	A507-00-0-0-	2700K	29° / 43° / 54°	○
	A507-00-0-1-	3000K	29° / 43° / 54°	○
	A507-00-0-3-	3500K	29° / 43° / 54°	○
	A507-00-0-2-	4000K	29° / 43° / 54°	○

III IP54 | CRI>90 | L80B10 >66,000h
 MacAdam Step 2
EXCL\*
Ø79
UGR <19
⚠

		CCT	Beam	LOR
BUDDY Super Spot	A507-00-00-	2700K	12°	62%
	A507-00-01-	3000K	12°	62%
	A507-00-03-	3500K	12°	62%
	A507-00-02-	4000K	12°	62%

III IP54 | CRI>90 | L80B10 >55,000h
 MacAdam Step 2
EXCL\*
Ø79
UGR <19
⚠

		CCT	Beam	LOR
BUDDY Tunable White	A507-01-17-	1800-4000K	28°	85%
	A507-01-18-	2700-5000K	28°	85%
	A507-01-27-	1800-4000K	43°	86%
	A507-01-28-	2700-5000K	43°	86%
	A507-01-37-	1800-4000K	55°	81%
	A507-01-38-	2700-5000K	55°	81%

III IP54 | CRI>90 | L80B10 >55,000h
 MacAdam Step 3
EXCL\*
Ø79
UGR <19
⚠

		CCT	Beam	LOR
BUDDY DIM to warm	A507-02-39-	1800-3000K	54°	75%

III IP54 | CRI>90 | L80B10 >55,000h
 MacAdam Step 3
EXCL\*
Ø79
UGR <19
⚠


○	BEAM	LOR
1	29°	82%
2	43°	83%
3	54°	80%

#### OPTIONAL ACCESSORY

##### BUDDY

##### High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS



COLOUR | W □ | N ■ | WG □■ | NG ■■ | WN □■ | MATERIAL | AL | PC/PMMA

COLOURS MAY AFFECT THE LIGHTING PARAMETERS  
OTHER CCT OPTIONS PLEASE CONSULT



# BUDDY Trimless

		CCT	Beam	LOR
BUDDY Trimless	A507-10-0-0-   W   N   G	2700K	29° / 43° / 54°	○
	A507-10-0-1-   W   N   G	3000K	29° / 43° / 54°	○
	A507-10-0-3-   W   N   G	3500K	29° / 43° / 54°	○
	A507-10-0-2-   W   N   G	4000K	29° / 43° / 54°	○

IP54 | CRI>90 | L80B10 > 66.000h
 MacAdam Step 2
 EXCL\*
 EXCL\*\*
 Ø79
 UGR <19

		CCT	Beam	LOR
BUDDY Trimless Super Spot	A507-10-00-   W   N   G	2700K	12°	62%
	A507-10-01-   W   N   G	3000K	12°	62%
	A507-10-03-   W   N   G	3500K	12°	62%
	A507-10-02-   W   N   G	4000K	12°	62%

IP54 | CRI>90 | L80B10 > 55.000h
 MacAdam Step 2
 EXCL\*
 EXCL\*\*
 Ø79
 UGR <19

		CCT	Beam	LOR
BUDDY Trimless Tunable White	A507-11-17-   W   N   G	1800-4000K	28°	85%
	A507-11-18-   W   N   G	2700-5000K	28°	85%
	A507-11-27-   W   N   G	1800-4000K	43°	86%
	A507-11-28-   W   N   G	2700-5000K	43°	86%
	A507-11-37-   W   N   G	1800-4000K	55°	81%
	A507-11-38-   W   N   G	2700-5000K	55°	81%

IP54 | CRI>90 | L80B10 > 55.000h
 MacAdam Step 3
 EXCL\*
 EXCL\*\*
 Ø79
 UGR <19

		CCT	Beam	LOR
BUDDY Trimless DIM to warm	A507-12-39-   W   N   G	1800-3000K	54°	75%

IP54 | CRI>90 | L80B10 > 55.000h
 MacAdam Step 3
 EXCL\*
 EXCL\*\*
 Ø79
 UGR <19


○	BEAM	LOR
1	29°	82%
2	43°	83%
3	54°	80%

## ACCESSORY

### BUDDY Trimless Accessory\*\*

#### A507-10-90

MANDATORY FOR INSTALLATION

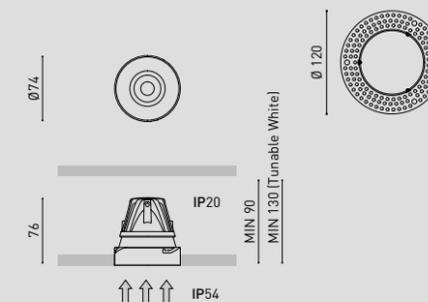

## OPTIONAL ACCESSORIES


### BUDDY Trimless

#### High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

#### TRIMLESS TOOL D79 X D120mm

#### A478-00-05



COLOUR | W □ | N ■ | G ■ | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS  
OTHER CCT OPTIONS PLEASE CONSULT



# BUDDY Tilt

		CCT	Beam	LOR
BUDDY Tilt	A508-00-0-0-	2700K	29° / 43° / 54°	○
	A508-00-0-1-	3000K	29° / 43° / 54°	○
	A508-00-0-3-	3500K	29° / 43° / 54°	○
	A508-00-0-2-	4000K	29° / 43° / 54°	○

III IP54 | CRI>90 | L80B10 >66.000h
 MacAdam Step 2
EXCL\*
355°
25°
Ø79
▲

		CCT	Beam	LOR
BUDDY Tilt Super Spot	A508-00-00-	2700K	12°	62%
	A508-00-01-	3000K	12°	62%
	A508-00-03-	3500K	12°	62%
	A508-00-02-	4000K	12°	62%

III IP54 | CRI>90 | L80B10 >55.000h
 MacAdam Step 2
EXCL\*
355°
25°
Ø79
▲

		CCT	Beam	LOR
BUDDY Tilt Tunable White	A508-01-17-	1800-4000K	28°	85%
	A508-01-18-	2700-5000K	28°	85%
	A508-01-27-	1800-4000K	43°	86%
	A508-01-28-	2700-5000K	43°	86%
	A508-01-37-	1800-4000K	55°	81%
	A508-01-38-	2700-5000K	55°	81%

III IP54 | CRI>90 | L80B10 >55.000h
 MacAdam Step 3
EXCL\*
355°
25°
Ø79
▲

		CCT	Beam	LOR
BUDDY Tilt DIM to warm	A508-02-39-	1800-3000K	54°	75%

III IP54 | CRI>90 | L80B10 >55.000h
 MacAdam Step 3
EXCL\*
355°
25°
Ø79
▲


○	BEAM	LOR
1	29°	82%
2	43°	83%
3	54°	80%

### OPTIONAL ACCESSORY

#### BUDDY Tilt

#### High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS



COLOUR | W □ | N ■ | WG □ | NG ■ | WN □ | MATERIAL | AL | PC/PMMA

COLOURS MAY AFFECT THE LIGHTING PARAMETERS  
OTHER CCT OPTIONS PLEASE CONSULT



# BUDDY Tilt Trimless

		CCT	Beam	LOR
BUDDY Tilt Trimless	A508-10-0-0-   W   N   G	2700K	29° / 43° / 54°	○
	A508-10-0-1-   W   N   G	3000K	29° / 43° / 54°	○
	A508-10-0-3-   W   N   G	3500K	29° / 43° / 54°	○
	A508-10-0-2-   W   N   G	4000K	29° / 43° / 54°	○

IP54 | CRI>90 | L80B10 >66,000h
 MacAdam Step 2
 EXCL\*
 EXCL\*\*
 25°
 Ø79

		CCT	Beam	LOR
BUDDY Tilt Trimless Super Spot	A508-10-00-   W   N   G	2700K	12°	62%
	A508-10-01-   W   N   G	3000K	12°	62%
	A508-10-03-   W   N   G	3500K	12°	62%
	A508-10-02-   W   N   G	4000K	12°	62%

IP54 | CRI>90 | L80B10 >55,000h
 MacAdam Step 2
 EXCL\*
 EXCL\*\*
 25°
 Ø79

		CCT	Beam	LOR
BUDDY Tilt Trimless Tunable White	A508-11-17-   W   N   G	1800-4000K	28°	85%
	A508-11-18-   W   N   G	2700-5000K	28°	85%
	A508-11-27-   W   N   G	1800-4000K	43°	86%
	A508-11-28-   W   N   G	2700-5000K	43°	86%
	A508-11-37-   W   N   G	1800-4000K	55°	81%
	A508-11-38-   W   N   G	2700-5000K	55°	81%

IP54 | CRI>90 | L80B10 >55,000h
 MacAdam Step 3
 EXCL\*
 EXCL\*\*
 25°
 Ø79

		CCT	Beam	LOR
BUDDY Tilt Trimless DIM to warm	A508-12-39-   W   N   G	1800-3000K	54°	75%

IP54 | CRI>90 | L80B10 >55,000h
 MacAdam Step 3
 EXCL\*
 EXCL\*\*
 25°
 Ø79



○	BEAM	LOR
1	29°	82%
2	43°	83%
3	54°	80%

**ACCESSORY**  
**BUDDY Tilt Trimless Accessory\*\***  
**A508-10-90**  
 MANDATORY FOR INSTALLATION



**OPTIONAL ACCESSORIES**  
**BUDDY Tilt Trimless**  
**High Chromatic LED**  
 NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

**TRIMLESS TOOL D79 X D120mm**  
**A478-00-05**



COLOUR | W □ | N ■ | G ■ | MATERIAL | AL | PC/PMMA

COLOURS MAY AFFECT THE LIGHTING PARAMETERS  
 OTHER CCT OPTIONS PLEASE CONSULT



# BUDDY Wall Washer

					CCT	LOR
BUDDY Wall Washer	A509-00-10-	W	N	WN	2700K	48%
	A509-00-11-	W	N	WN	3000K	48%
	A509-00-13-	W	N	WN	3500K	48%
	A509-00-12-	W	N	WN	4000K	48%

III IP20 | CRI>90 | L80B10 >66,000h



					CCT	LOR
BUDDY Wall Washer Tunable White	A509-01-17-	W	N	WN	1800-4000K	49%
	A509-01-18-	W	N	WN	2700-5000K	49%

III IP20 | CRI>90 | L80B10 >55,000h




## OPTIONAL ACCESSORY

### BUDDY WALL WASHER

#### High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS



COLOUR | W  | N  | WN  | MATERIAL | AL  | PMMA

COLOURS MAY AFFECT THE LIGHTING PARAMETERS  
OTHER CCT & DIM OPTIONS PLEASE CONSULT



# BUDDY Wall Washer Trimless

			CCT	LOR
BUDDY Wall Washer Trimless	A509-10-10-	W   N	2700K	48%
	A509-10-11-	W   N	3000K	48%
	A509-10-13-	W   N	3500K	48%
	A509-10-12-	W   N	4000K	48%

III IP20 | CRI>90 | L80B10 >66,000h



			CCT	LOR
BUDDY Wall Washer Trimless Tunable White	A509-11-17-	W   N	1800-4000K	49%
	A509-11-18-	W   N	2700-5000K	49%

III IP20 | CRI>90 | L80B10 >55,000h




## ACCESSORY

### BUDDY WALL WASHER

#### Trimless Accessory\*\*

A509-10-90

MANDATORY FOR INSTALLATION



## OPTIONAL ACCESSORIES



### BUDDY Tilt Trimless

#### High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

### TRIMLESS TOOL D79 X D120mm






A478-00-05



COLOUR | W □ | N ■ | MATERIAL | AL | PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS  
OTHER CCT & DIM OPTIONS PLEASE CONSULT

# BUDDY DRIVERS

*DRIVER OPTIONS				P	I	CCT	Flux			
<b>BUDDY 1</b> Buddy Buddy Trimless Buddy Tilt Buddy Tilt Trimless		 NO DIM	<b>0434-01-85</b>	4W	125mA	2700K	760 lm			
						3000K	790 lm			
						3500K	795 lm			
						4000K	800 lm			
<b>BUDDY 2</b> Buddy Buddy Trimless Buddy Tilt Buddy Tilt Trimless Buddy Wall Washer Buddy Wall Washer Trimless		 NO DIM	<b>0434-01-86</b>	6,6W	200mA					
							 DALI	<b>0434-01-89</b>	2700K	1150 lm
									3000K	1200 lm
									3500K	1210 lm
									4000K	1220 lm
	 CASAMBI	<b>0434-01-91</b>								
				 PHASE CUT	<b>0434-01-92</b>					
<b>BUDDY</b> Super Spot		 NO DIM	<b>0434-01-87</b>	6W	500mA	2700K	750 lm			
						3000K	790 lm			
	 DALI	<b>0434-01-88</b>								
			3500K	825 lm						
						4000K	845 lm			
<b>BUDDY</b> Tunable White		 DALI	<b>0434-01-90</b>	6,7W	400mA	1800-4000K	690 lm			
						2700-5000K	815 lm			
<b>BUDDY</b> DIM to warm		 DALI	<b>0434-01-94</b>	6W	350mA	1800-3000K	650 lm			
									 PHASE CUT	<b>0434-01-95</b>
<b>BUDDY</b> Wall Washer Tunable White		 DALI	<b>0434-01-96</b>	8,4W	500mA	1800-4000K	830 lm			
						2700-5000K	1000 lm			

220  
240 V~ | 48V PLEASE CONSULT



# BUDDY L

		CCT	Beam	LOR
BUDDY L	A568-00-0-0-	2700K	32° / 44° / 51°	○
	A568-00-0-1-	3000K	32° / 44° / 51°	○
	A568-00-0-3-	3500K	32° / 44° / 51°	○
	A568-00-0-2-	4000K	32° / 44° / 51°	○
BUDDY L Super Spot	A568-00-00-	2700K	13°	67%
	A568-00-01-	3000K	13°	67%
	A568-00-03-	3500K	13°	67%
	A568-00-02-	4000K	13°	67%

III IP54 | CRI>90 | L80B10 >66,000h



		CCT	Beam	LOR
BUDDY L Tunable White	A568-01-17-	1800-4000K	29°	78%
	A568-01-18-	2700-5000K	29°	78%
	A568-01-27-	1800-4000K	41°	83%
	A568-01-28-	2700-5000K	41°	83%
	A568-01-37-	1800-4000K	51°	84%
	A568-01-38-	2700-5000K	51°	84%
BUDDY L DIM to warm	A568-02-39-	1800-3000K	56°	82%

III IP54 | CRI>90 | L80B10 >55,000h






○	BEAM	LOR
1	32°	76%
2	44°	82%
3	51°	85%

### ACCESSORY

#### BUDDY L Trimless Accessory\*\*

#### A568-10-90

MANDATORY FOR INSTALLATION



### OPTIONAL ACCESSORIES

#### BUDDY L



#### BUDDY L Trimless

#### High Chromatic LED ⓘ » 361

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

#### TRIMLESS TOOL D105 X D145mm

#### A478-00-06



COLOUR | W □ | N ■ | WG □ | NG ■ | WN □ | G ■ | MATERIAL | AL | PC/PMMA

COLOURS MAY AFFECT THE LIGHTING PARAMETERS



# BUDDY L Trimless

		CCT	Beam	LOR
BUDDY L Trimless	A568-10-0-0-   W   N   G	2700K	32° / 44° / 51°	○
	A568-10-0-1-   W   N   G	3000K	32° / 44° / 51°	○
	A568-10-0-3-   W   N   G	3500K	32° / 44° / 51°	○
	A568-10-0-2-   W   N   G	4000K	32° / 44° / 51°	○
BUDDY L Trimless Super Spot	A568-10-00-   W   N   G	2700K	13°	67%
	A568-10-01-   W   N   G	3000K	13°	67%
	A568-10-03-   W   N   G	3500K	13°	67%
	A568-10-02-   W   N   G	4000K	13°	67%

III IP54 | CRI>90 | L80B10 >66.000h



		CCT	Beam	LOR
BUDDY L Trimless Tunable White	A568-11-17-   W   N   G	1800-4000K	29°	78%
	A568-11-18-   W   N   G	2700-5000K	29°	78%
	A568-11-27-   W   N   G	1800-4000K	41°	83%
	A568-11-28-   W   N   G	2700-5000K	41°	83%
	A568-11-37-   W   N   G	1800-4000K	51°	84%
	A568-11-38-   W   N   G	2700-5000K	51°	84%
BUDDY L Trimless DIM to warm	A568-12-39-   W   N   G	1800-3000K	56°	82%


III IP54 | CRI>90 | L80B10 >55.000h



○	BEAM	LOR
1	32°	76%
2	44°	82%
3	51°	85%

ACCESSORY  
BUDDY L Trimless Accessory\*\*  
A568-10-90  
MANDATORY FOR INSTALLATION

OPTIONAL ACCESSORIES  
BUDDY L  
BUDDY L Trimless  
High Chromatic LED ⓘ » 361  
NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

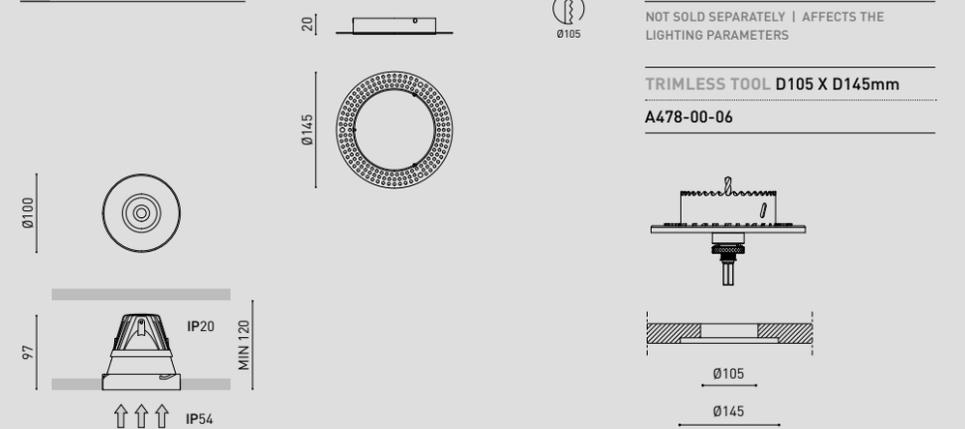

COLOUR | W □ | N ■ | WG □ | NG ■ | WN □ | G ■ | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS



# BUDDY L Tilt

						CCT	Beam	LOR	
BUDDY L Tilt	A569-00-0-0-	W	N	WG	NG	WN	2700K	32°/44°/51°	○
	A569-00-0-1-	W	N	WG	NG	WN	3000K	32°/44°/51°	○
	A569-00-0-3-	W	N	WG	NG	WN	3500K	32°/44°/51°	○
	A569-00-0-2-	W	N	WG	NG	WN	4000K	32°/44°/51°	○
BUDDY L Tilt Super Spot	A569-00-00-	W	N	WG	NG	WN	2700K	13°	67%
	A569-00-01-	W	N	WG	NG	WN	3000K	13°	67%
	A569-00-03-	W	N	WG	NG	WN	3500K	13°	67%
	A569-00-02-	W	N	WG	NG	WN	4000K	13°	67%

III IP54 | CRI>90 | L80B10 >66,000h



						CCT	Beam	LOR	
BUDDY L Tilt Tunable White	A569-01-17-	W	N	WG	NG	WN	1800-4000K	29°	78%
	A569-01-18-	W	N	WG	NG	WN	2700-5000K	29°	78%
	A569-01-27-	W	N	WG	NG	WN	1800-4000K	41°	83%
	A569-01-28-	W	N	WG	NG	WN	2700-5000K	41°	83%
	A569-01-37-	W	N	WG	NG	WN	1800-4000K	51°	84%
	A569-01-38-	W	N	WG	NG	WN	2700-5000K	51°	84%
BUDDY L Tilt DIM to warm	A569-02-39-	W	N	WG	NG	WN	1800-3000K	56°	82%

III IP54 | CRI>90 | L80B10 >55,000h





○	BEAM	LOR
1	32°	76%
2	44°	82%
3	51°	85%

### ACCESSORY

#### BUDDY L Trimless Accessory\*\*

#### A569-10-90

MANDATORY FOR INSTALLATION



### OPTIONAL ACCESSORIES

#### BUDDY L Tilt


#### BUDDY L Tilt Trimless

#### High Chromatic LED ⓘ » 361

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

#### TRIMLESS TOOL D105 X D145mm

#### A478-00-06



COLOUR | W □ | N ■ | WG □ | NG ■ | WN □ | G ■ | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS



# BUDDY L Tilt Trimless

		CCT	Beam	LOR
BUDDY L Tilt Trimless	A569-10-0-0-   W   N   G	2700K	32°/44°/51°	○
	A569-10-0-1-   W   N   G	3000K	32°/44°/51°	○
	A569-10-0-3-   W   N   G	3500K	32°/44°/51°	○
	A569-10-0-2-   W   N   G	4000K	32°/44°/51°	○
BUDDY L Tilt Trimless Super Spot	A569-10-00-   W   N   G	2700K	13°	67%
	A569-10-01-   W   N   G	3000K	13°	67%
	A569-10-03-   W   N   G	3500K	13°	67%
	A569-10-02-   W   N   G	4000K	13°	67%

III IP54 | CRI>90 | L80B10 >66.000h



		CCT	Beam	LOR
BUDDY L Tilt Trimless Tunable White	A569-11-17-   W   N   G	1800-4000K	29°	78%
	A569-11-18-   W   N   G	2700-5000K	29°	78%
	A569-11-27-   W   N   G	1800-4000K	41°	83%
	A569-11-28-   W   N   G	2700-5000K	41°	83%
	A569-11-37-   W   N   G	1800-4000K	51°	84%
	A569-11-38-   W   N   G	2700-5000K	51°	84%
BUDDY L Tilt Trimless DIM to warm	A569-12-39-   W   N   G	1800-3000K	56°	82%

III IP54 | CRI>90 | L80B10 >55.000h





○	BEAM	LOR
1	32°	76%
2	44°	82%
3	51°	85%

#### ACCESSORY

##### BUDDY L Trimless Accessory\*\*

##### A569-10-90

MANDATORY FOR INSTALLATION



#### OPTIONAL ACCESSORIES

##### BUDDY L Tilt


##### BUDDY L Tilt Trimless

##### High Chromatic LED ⓘ » 361

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

##### TRIMLESS TOOL D105 X D145mm




##### A478-00-06



COLOUR | W □ | N ■ | WG □ | NG ■ | WN □ | G ■ | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS

# BUDDY L DRIVERS

*DRIVER OPTIONS				P	I	CCT	Flux			
<b>BUDDY L 1</b> Buddy L Buddy L Trimless Buddy L Tilt Buddy L Tilt Trimless		NO DIM	0433-01-37	8,1W	250mA	2700K	1500 lm			
						3000K	1560 lm			
						3500K	1600 lm			
						4000K	1600 lm			
		NO DIM	0433-00-21							
<b>BUDDY L 2</b> Buddy L Buddy L Trimless Buddy L Tilt Buddy L Tilt Trimless		DALI	0433-01-40	11,5W	350mA	2700K	2010 lm			
						3000K	2090 lm			
						3500K	2120 lm			
						4000K	2120 lm			
		CASAMBI	0433-01-43							
		PHASE CUT	0433-01-39							
<b>BUDDY L Super Spot</b>		NO DIM	0433-01-38	11,6W	650mA	2700K	1430 lm			
						3000K	1510 lm			
						3500K	1570 lm			
						4000K	1610 lm			
		DALI	0433-01-41							
		CASAMBI	0434-01-98							
<b>BUDDY L Tunable White</b>		DALI	0433-01-42	11,6W	350mA	1800-4000K	1270 lm			
						2700-5000K	1630 lm			
<b>BUDDY L DIM to warm</b>		DALI	0433-01-40	11,6W	350mA	1800-3000K	1280 lm			
									CASAMBI	0433-01-43

220  
240 V~ | 48V PLEASE CONSULT

**BUDDY**  
**PURPOSEFUL**  
**DESIGN**

by **ARKOSLIGHT**