



BUDDY

PURPOSEFUL DESIGN

ARKOSLIGHT



Compact et Puissant

Une technologie LED innovante de dernière génération, extrêmement efficace. Capable de fournir un rendement lumineux allant jusqu'à **200lm/W**.

Buddy incarne la sophistication d'un luminaire encastré avec son design soigneusement élaboré et ses finitions de haute qualité. Son corps compact en aluminium et ses lentilles précises canalisent tout le potentiel de cette **nouvelle génération LED**.

Plusieurs flux et puissances disponibles, notamment **4W** pour **800lm** et **11,5W** pour **2120lm**.

Un Buddy, Plusieurs Options

Il propose deux modes d'installation : avec une **collerette légère** pour une installation rapide et efficace, ou **sans collerette** (trimless) pour une intégration totale dans l'architecture.

De plus, il offre deux options supplémentaires : **fixe** ou **basculante**. Hautement fonctionnel, sa version Tilt est entièrement orientable. Grâce à sa possibilité de basculer et de pivoter, une fois installé, nous pouvons, avec un simple réglage manuel, modifier son orientation.

Disponible également dans différentes finitions.



355°



25°

A modern interior space with a large glass wall and a swimming pool. A woman in a black outfit stands in the glass doorway, looking out. The room has white walls, a light-colored floor, and a minimalist design. A small table with a glass bowl and a framed picture is visible on the left. The swimming pool is on the right, with a dark blue sky and trees visible through the glass wall.

Étanche et Résistant

Grâce à son degré de **protection IP54**, même dans sa version orientable Tilt, Buddy est exceptionnellement résistant à la pénétration de particules de poussière et d'eau.




Liberté d'Éclairage, Liberté d'Utilisation

La famille Buddy offre une polyvalence exceptionnelle avec trois options d'ouverture du faisceau lumineux : **spot** / **medium** / **flood**, ainsi qu'une version **Super spot de 12° / 13°**.


Cela en fait un luminaire adaptable, lui permettant de répondre aux besoins d'éclairage général ainsi que d'accentuation.

De plus, Buddy est hautement technique, assurant un flux lumineux uniforme et un bon niveau de confort visuel grâce à son LED, ses lentilles et son écran anti-éblouissement.

BUDDY / BUDDY L

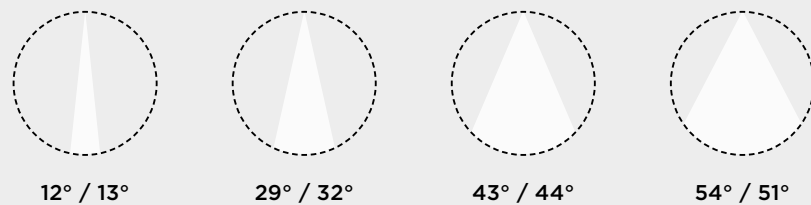


BUDDY / BUDDY L TUNABLE WHITE

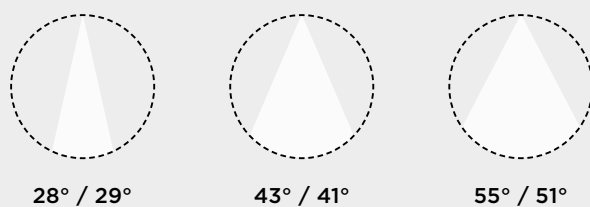

Buddy Super Spot

Avec une ouverture de faisceau lumineux très précise (12° / 13°).
Il est conçu pour être utilisé comme lumière d'accentuation,
Buddy Super Spot garantit un flux lumineux uniforme
et un bon confort visuel.

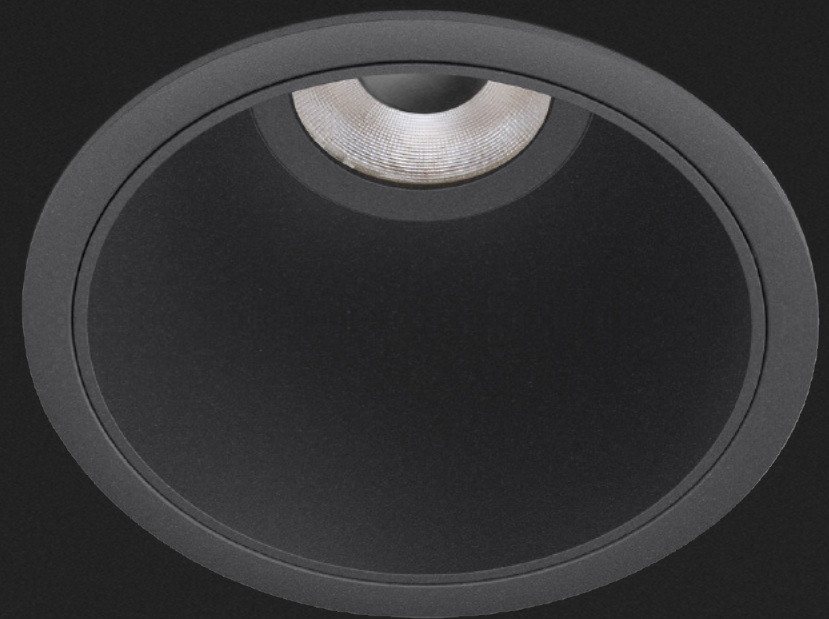

Buddy Wall Washer

La vertu du lèche-mur Buddy réside dans son système optique qui, en alternative à la projection asymétrique du luminaire encastré orientable, permet une répartition verticale uniforme de la lumière sans interruption ni des changements d'intensité. Disponible en versions recessed et trimless, et avec la technologie 'Tunable White', qui permet de réguler l'intensité et la température de couleur.






100%flux - 3000K



50%flux - 2400K

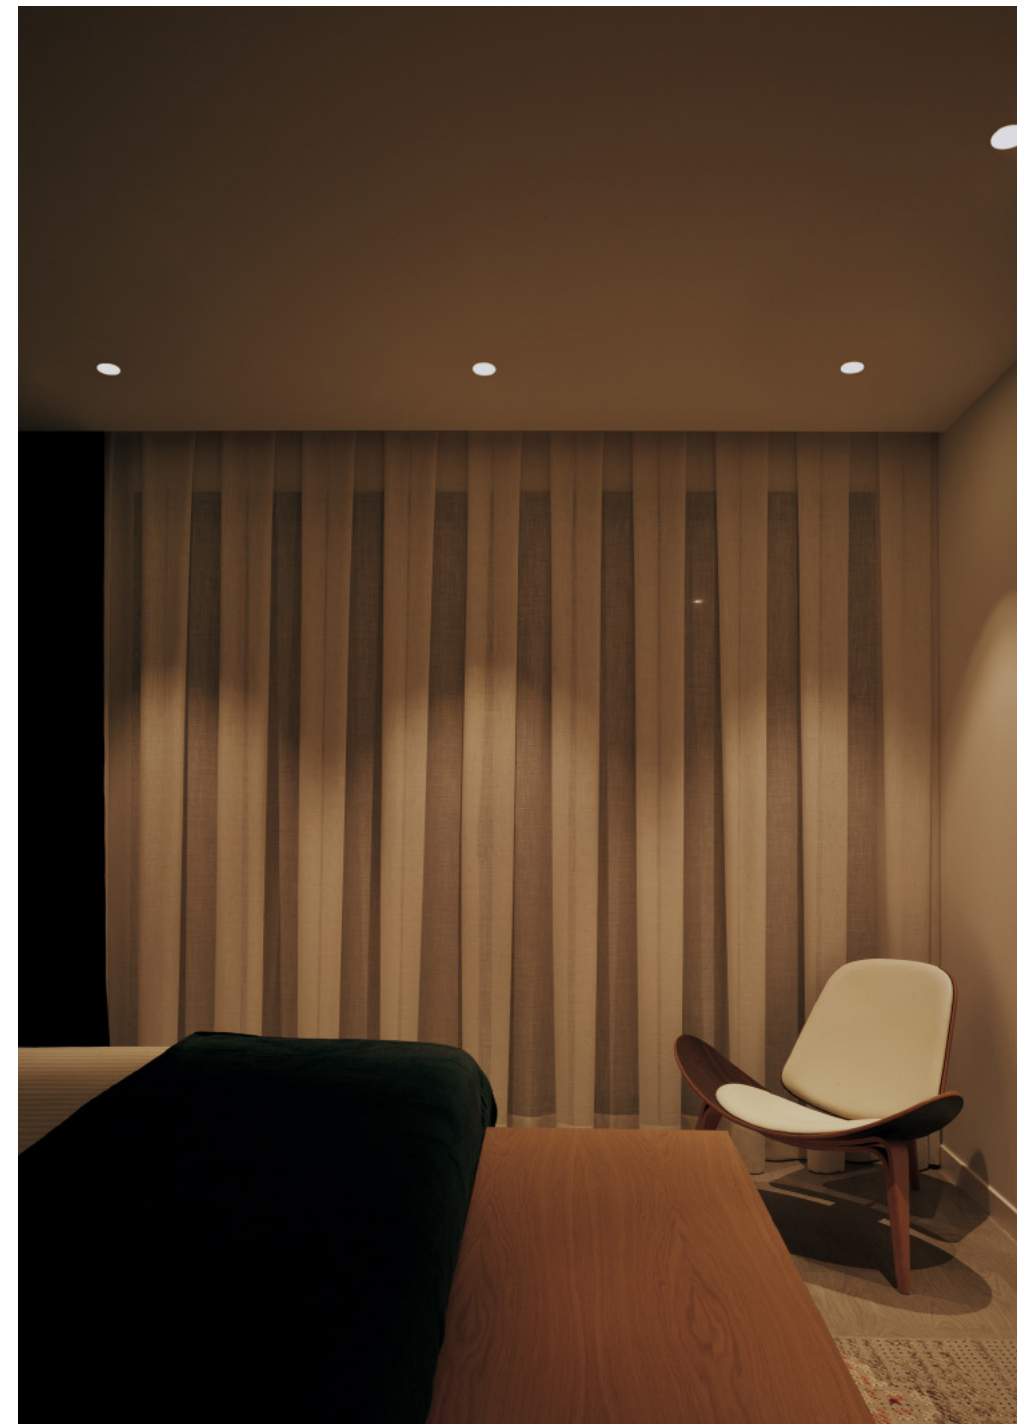

5%flux - 1800K

DIM to warm

Pour les moments de la journée où l'on recherche l'activation et les rythmes biologiques élevés, la lumière froide et abondante est appropriée. En revanche, aux heures où l'on cherche la désactivation et la détente, la température chaude et la lumière strictement nécessaire sont les caractéristiques souhaitées.

Tunable white

Buddy Tunable White permet de régler indépendamment la température de couleur et l'intensité de la lumière, offrant une flexibilité totale et la reproduction de la lumière naturelle tout au long de la journée. Cette technologie contribue au confort et au bien-être psychologique des personnes.



BUDDY
SPÉCIFICATIONS
TECHNIQUES



VERSIONS



BUDDY



BUDDY TRIMLESS



BUDDY TILT



BUDDY TILT TRIMLESS



BUDDY WALL WASHER



BUDDY WALL WASHER TRIMLESS



BUDDY L



BUDDY L TRIMLESS



BUDDY L TILT



BUDDY L TILT TRIMLESS

FINITIONS



W



W



W



W



N




N




N




N



WG



G



WN



NG



WN



BUDDY

									CCT	Beam	LOR
BUDDY	A507-00-	○ -0-	W N WG NG WN						2700K	29° / 43° / 54°	○
	A507-00-	○ -1-	W N WG NG WN						3000K	29° / 43° / 54°	○
	A507-00-	○ -3-	W N WG NG WN						3500K	29° / 43° / 54°	○
	A507-00-	○ -2-	W N WG NG WN						4000K	29° / 43° / 54°	○

III

IP54

CRI>90

L80B10
>66,000h

MacAdam
Step 2

EXCL*

Ø79

UGR <19

									CCT	Beam	LOR
BUDDY Super Spot	A507-00-00-	W N WG NG WN							2700K	12°	62%
	A507-00-01-	W N WG NG WN							3000K	12°	62%
	A507-00-03-	W N WG NG WN							3500K	12°	62%
	A507-00-02-	W N WG NG WN							4000K	12°	62%

III

IP54

CRI>90

L80B10
>55,000h

MacAdam
Step 2

EXCL*

Ø79

UGR <19

									CCT	Beam	LOR
BUDDY Tunable White	A507-01-17-	W N WG NG WN							1800-4000K	28°	85%
	A507-01-18-	W N WG NG WN							2700-5000K	28°	85%
	A507-01-27-	W N WG NG WN							1800-4000K	43°	86%
	A507-01-28-	W N WG NG WN							2700-5000K	43°	86%
	A507-01-37-	W N WG NG WN							1800-4000K	55°	81%
	A507-01-38-	W N WG NG WN							2700-5000K	55°	81%

III

IP54

CRI>90

L80B10
>55,000h

MacAdam
Step 3

EXCL*

Ø79

UGR <19

BUDDY DIM to warm	A507-02-39-	W N WG NG WN							1800-3000K	54°	75%
----------------------	-------------	----------------------	--	--	--	--	--	--	------------	-----	-----

III

IP54

CRI>90

L80B10
>55,000h

MacAdam
Step 3

EXCL*

Ø79

UGR <19


○	BEAM	LOR
1	29°	82%
2	43°	83%
3	54°	80%

OPTIONAL ACCESSORY

BUDDY

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS



COLOUR | W | N | WG | NG | WN | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
OTHER CCT OPTIONS PLEASE CONSULT



BUDDY Trimless

		CCT	Beam	LOR
BUDDY Trimless	A507-10- -0- W N G	2700K	29° / 43° / 54°	
	A507-10- -1- W N G	3000K	29° / 43° / 54°	
	A507-10- -3- W N G	3500K	29° / 43° / 54°	
	A507-10- -2- W N G	4000K	29° / 43° / 54°	

III

IP54

CRI>90

L80B10
> 66.000 h

MacAdam
Step 2

EXCL*

EXCL**

Ø79

UGR <19

		CCT	Beam	LOR
BUDDY Trimless Super Spot	A507-10-00- W N G	2700K	12°	62%
	A507-10-01- W N G	3000K	12°	62%
	A507-10-03- W N G	3500K	12°	62%
	A507-10-02- W N G	4000K	12°	62%

III

IP54

CRI>90

L80B10
> 55.000 h

MacAdam
Step 2

EXCL*

EXCL**

Ø79

UGR <19

		CCT	Beam	LOR
BUDDY Trimless Tunable White	A507-11-17- W N G	1800-4000K	28°	85%
	A507-11-18- W N G	2700-5000K	28°	85%
	A507-11-27- W N G	1800-4000K	43°	86%
	A507-11-28- W N G	2700-5000K	43°	86%
	A507-11-37- W N G	1800-4000K	55°	81%
	A507-11-38- W N G	2700-5000K	55°	81%

III

IP54

CRI>90

L80B10
> 55.000 h

MacAdam
Step 3

EXCL*

EXCL**

Ø79

UGR <19

		CCT	Beam	LOR
BUDDY Trimless DIM to warm	A507-12-39- W N G	1800-3000K	54°	75%

III

IP54

CRI>90

L80B10
> 55.000 h

MacAdam
Step 3

EXCL*

EXCL**

Ø79

UGR <19

	BEAM	LOR
1	29°	82%
2	43°	83%
3	54°	80%

ACCESSORY

BUDDY Trimless Accessory**


A507-10-90

MANDATORY FOR INSTALLATION

20

Ø 120

Ø79



OPTIONAL ACCESSORIES


BUDDY Trimless

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

TRIMLESS TOOL D79 X D120mm

A478-00-05



COLOUR | W | N | G | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
OTHER CCT OPTIONS PLEASE CONSULT



BUDDY Tilt

									CCT	Beam	LOR
BUDDY Tilt	A508-00-	○ -0-	W	N	WG	NG	WN		2700K	29° / 43° / 54°	○
	A508-00-	○ -1-	W	N	WG	NG	WN		3000K	29° / 43° / 54°	○
	A508-00-	○ -3-	W	N	WG	NG	WN		3500K	29° / 43° / 54°	○
	A508-00-	○ -2-	W	N	WG	NG	WN		4000K	29° / 43° / 54°	○

III

IP54

CRI>90

L80B10
> 66.000h

MacAdam
Step 2

EXCL*

355°

25°

Ø79

									CCT	Beam	LOR
BUDDY Tilt Super Spot	A508-00-00-		W	N	WG	NG	WN		2700K	12°	62%
	A508-00-01-		W	N	WG	NG	WN		3000K	12°	62%
	A508-00-03-		W	N	WG	NG	WN		3500K	12°	62%
	A508-00-02-		W	N	WG	NG	WN		4000K	12°	62%

III

IP54

CRI>90

L80B10
> 55.000h

MacAdam
Step 2

EXCL*

355°

25°

Ø79

									CCT	Beam	LOR
BUDDY Tilt Tunable White	A508-01-17-		W	N	WG	NG	WN		1800-4000K	28°	85%
	A508-01-18-		W	N	WG	NG	WN		2700-5000K	28°	85%
	A508-01-27-		W	N	WG	NG	WN		1800-4000K	43°	86%
	A508-01-28-		W	N	WG	NG	WN		2700-5000K	43°	86%
	A508-01-37-		W	N	WG	NG	WN		1800-4000K	55°	81%
	A508-01-38-		W	N	WG	NG	WN		2700-5000K	55°	81%

III

IP54

CRI>90

L80B10
> 55.000h

MacAdam
Step 3

EXCL*

355°

25°

Ø79

									CCT	Beam	LOR
BUDDY Tilt DIM to warm	A508-02-39-		W	N	WG	NG	WN		1800-3000K	54°	75%

III

IP54

CRI>90

L80B10
> 55.000h

MacAdam
Step 3

EXCL*

355°

25°

Ø79


○	BEAM	LOR
1	29°	82%
2	43°	83%
3	54°	80%

OPTIONAL ACCESSORY

BUDDY Tilt

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE
LIGHTING PARAMETERS



COLOUR | W | N | WG | NG | WN |

MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
OTHER CCT OPTIONS PLEASE CONSULT



BUDDY Tilt Trimless

		CCT	Beam	LOR
BUDDY Tilt Trimless	A508-10- ○ -0- W N G	2700K	29° / 43° / 54°	○
	A508-10- ○ -1- W N G	3000K	29° / 43° / 54°	○
	A508-10- ○ -3- W N G	3500K	29° / 43° / 54°	○
	A508-10- ○ -2- W N G	4000K	29° / 43° / 54°	○

III

IP54

CRI>90

L80B10
> 66.000h

		CCT	Beam	LOR
BUDDY Tilt Trimless Super Spot	A508-10-00- W N G	2700K	12°	62%
	A508-10-01- W N G	3000K	12°	62%
	A508-10-03- W N G	3500K	12°	62%
	A508-10-02- W N G	4000K	12°	62%

III

IP54

CRI>90

L80B10
> 55.000h

		CCT	Beam	LOR
BUDDY Tilt Trimless Tunable White	A508-11-17- W N G	1800-4000K	28°	85%
	A508-11-18- W N G	2700-5000K	28°	85%
	A508-11-27- W N G	1800-4000K	43°	86%
	A508-11-28- W N G	2700-5000K	43°	86%
	A508-11-37- W N G	1800-4000K	55°	81%
	A508-11-38- W N G	2700-5000K	55°	81%

III

IP54

CRI>90

L80B10
> 55.000h

		CCT	Beam	LOR
BUDDY Tilt Trimless DIM to warm	A508-12-39- W N G	1800-3000K	54°	75%

III

IP54

CRI>90

L80B10
> 55.000h




○	BEAM	LOR
1	29°	82%
2	43°	83%
3	54°	80%

ACCESSORY

BUDDY Tilt Trimless Accessory**

A508-10-90

MANDATORY FOR INSTALLATION



COLOUR | W

□

 | N

■

 | G

■

 | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
OTHER CCT OPTIONS PLEASE CONSULT

OPTIONAL ACCESSORIES

BUDDY Tilt Trimless

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

TRIMLESS TOOL D79 X D120mm

A478-00-05



BUDDY Wall Washer

						CCT	LOR
BUDDY Wall Washer	A509-00-10-	W	N	WN		2700K	48%
	A509-00-11-	W	N	WN		3000K	48%
	A509-00-13-	W	N	WN		3500K	48%
	A509-00-12-	W	N	WN		4000K	48%

III

IP20

CRI>90

L80B10
>66,000h

MacAdam Step 2

EXCL*

360°

Ø79



						CCT	LOR
BUDDY Wall Washer Tunable White	A509-01-17-	W	N	WN		1800-4000K	49%
	A509-01-18-	W	N	WN		2700-5000K	49%

III

IP20

CRI>90

L80B10
>55,000h

MacAdam Step 3

EXCL*

360°

Ø79




OPTIONAL ACCESSORY

BUDDY WALL WASHER

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS



COLOUR | W  | N  | WN  | MATERIAL | AL  | PMMA 

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
OTHER CCT & DIM OPTIONS PLEASE CONSULT



BUDDY Wall Washer Trimless

				CCT	LOR
BUDDY Wall Washer Trimless	A509-10-10-	W	N	2700K	48%
	A509-10-11-	W	N	3000K	48%
	A509-10-13-	W	N	3500K	48%
	A509-10-12-	W	N	4000K	48%
III IP20 CRI>90 L80B10 >66,000h				MacAdam Step 2	EXCL* EXCL** Ø79

				CCT	LOR
BUDDY Wall Washer Trimless Tunable White	A509-11-17-	W	N	1800-4000K	49%
	A509-11-18-	W	N	2700-5000K	49%
III IP20 CRI>90 L80B10 >55,000h				MacAdam Step 3	EXCL* EXCL** Ø79


ACCESSORY

BUDDY WALL WASHER

Trimless Accessory**

A509-10-90

MANDATORY FOR INSTALLATION



OPTIONAL ACCESSORIES



BUDDY Tilt Trimless

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

TRIMLESS TOOL D79 X D120mm










A478-00-05



COLOUR | W □ | N ■ | MATERIAL | AL | PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
OTHER CCT & DIM OPTIONS PLEASE CONSULT

BUDDY DRIVERS

DRIVER OPTIONS				P	I	CCT	Flux
BUDDY 1 Buddy Buddy Trimless Buddy Tilt Buddy Tilt Trimless		 NO DIM	0434-01-85	4 W	125 mA	2700K	760 lm
						3000K	790 lm
						3500K	795 lm
						4000K	800 lm
BUDDY 2 Buddy Buddy Trimless Buddy Tilt Buddy Tilt Trimless Buddy Wall Washer Buddy Wall Washer Trimless		 NO DIM	0434-01-86				
		 DALI	0434-01-89	6,6 W	200 mA	2700K	1150 lm
						3000K	1200 lm
						3500K	1210 lm
						4000K	1220 lm
	 CASAMBI	0434-01-91					
	 PHASE CUT	0434-01-92					
BUDDY Super Spot		 NO DIM	0434-01-87	6 W	500 mA	2700K	750 lm
						3000K	790 lm
						3500K	825 lm
						4000K	845 lm
BUDDY Tunable White		 DALI	0434-01-90	6,7 W	400 mA	1800-4000K	690 lm
						2700-5000K	815 lm
BUDDY DIM to warm		 DALI	0434-01-94	6 W	350 mA	1800-3000K	650 lm
		 PHASE CUT	0434-01-95				
BUDDY Wall Washer Tunable White		 DALI	0434-01-96	8,4 W	500 mA	1800-4000K	830 lm
						2700-5000K	1000 lm

220
240 V~ | 48V PLEASE CONSULT



BUDDY L

							CCT	Beam	LOR
BUDDY L	A568-00- ○ -0-	W	N	WG	NG	WN	2700K	32° / 44° / 51°	○
	A568-00- ○ -1-	W	N	WG	NG	WN	3000K	32° / 44° / 51°	○
	A568-00- ○ -3-	W	N	WG	NG	WN	3500K	32° / 44° / 51°	○
	A568-00- ○ -2-	W	N	WG	NG	WN	4000K	32° / 44° / 51°	○
BUDDY L Super Spot	A568-00-00-	W	N	WG	NG	WN	2700K	13°	67%
	A568-00-01-	W	N	WG	NG	WN	3000K	13°	67%
	A568-00-03-	W	N	WG	NG	WN	3500K	13°	67%
	A568-00-02-	W	N	WG	NG	WN	4000K	13°	67%

III

IP54

CRI>90

L80B10
> 66.000 h

MacAdam
Step 2

EXCL*

Ø105

UGR <19

							CCT	Beam	LOR
BUDDY L Tunable White	A568-01-17-	W	N	WG	NG	WN	1800-4000K	29°	78%
	A568-01-18-	W	N	WG	NG	WN	2700-5000K	29°	78%
	A568-01-27-	W	N	WG	NG	WN	1800-4000K	41°	83%
	A568-01-28-	W	N	WG	NG	WN	2700-5000K	41°	83%
	A568-01-37-	W	N	WG	NG	WN	1800-4000K	51°	84%
	A568-01-38-	W	N	WG	NG	WN	2700-5000K	51°	84%
BUDDY L DIM to warm	A568-02-39-	W	N	WG	NG	WN	1800-3000K	56°	82%

III

IP54

CRI>90

L80B10
> 55.000 h

MacAdam
Step 3

EXCL*

Ø105

UGR <19

○	BEAM	LOR
1	32°	76%
2	44°	82%
3	51°	85%

ACCESSORY

BUDDY L Trimless Accessory**

A568-10-90

MANDATORY FOR INSTALLATION

20

Ø105

Ø112

97

IP20

MIN 120

↑↑↑ IP54

OPTIONAL ACCESSORIES

BUDDY L

BUDDY L Trimless

High Chromatic LED

i» 361

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

TRIMLESS TOOL D105 X D145mm

A478-00-06

Ø105

Ø145

COLOUR | W | N | WG | NG | WN | G | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS



BUDDY L Trimless

		CCT	Beam	LOR
BUDDY L Trimless	A568-10- ○ -0- W N G	2700K	32° / 44° / 51°	○
	A568-10- ○ -1- W N G	3000K	32° / 44° / 51°	○
	A568-10- ○ -3- W N G	3500K	32° / 44° / 51°	○
	A568-10- ○ -2- W N G	4000K	32° / 44° / 51°	○
BUDDY L Trimless Super Spot	A568-10-00- W N G	2700K	13°	67%
	A568-10-01- W N G	3000K	13°	67%
	A568-10-03- W N G	3500K	13°	67%
	A568-10-02- W N G	4000K	13°	67%

III

IP54

CRI>90

L80B10
>66.000h

MacAdam
Step 2

EXCL*

EXCL**

Ø105

UGR <19

		CCT	Beam	LOR
BUDDY L Trimless Tunable White	A568-11-17- W N G	1800-4000K	29°	78%
	A568-11-18- W N G	2700-5000K	29°	78%
	A568-11-27- W N G	1800-4000K	41°	83%
	A568-11-28- W N G	2700-5000K	41°	83%
	A568-11-37- W N G	1800-4000K	51°	84%
	A568-11-38- W N G	2700-5000K	51°	84%
BUDDY L Trimless DIM to warm	A568-12-39- W N G	1800-3000K	56°	82%

III

IP54

CRI>90

L80B10
>55.000h

MacAdam
Step 3

EXCL*

EXCL**

Ø105

UGR <19



○	BEAM	LOR
1	32°	76%
2	44°	82%
3	51°	85%

ACCESSORY

BUDDY L Trimless Accessory**

A568-10-90

MANDATORY FOR INSTALLATION



OPTIONAL ACCESSORIES

BUDDY L


BUDDY L Trimless

High Chromatic LED i » 361

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

TRIMLESS TOOL D105 X D145mm

A478-00-06



COLOUR | W | N | WG | NG | WN | G | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS



BUDDY L Tilt

									CCT	Beam	LOR
BUDDY L Tilt	A569-00-	○ -0-	W N	WG	NG	WN			2700K	32° / 44° / 51°	○
	A569-00-	○ -1-	W N	WG	NG	WN			3000K	32° / 44° / 51°	○
	A569-00-	○ -3-	W N	WG	NG	WN			3500K	32° / 44° / 51°	○
	A569-00-	○ -2-	W N	WG	NG	WN			4000K	32° / 44° / 51°	○
BUDDY L Tilt Super Spot	A569-00-00-		W N	WG	NG	WN			2700K	13°	67%
	A569-00-01-		W N	WG	NG	WN			3000K	13°	67%
	A569-00-03-		W N	WG	NG	WN			3500K	13°	67%
	A569-00-02-		W N	WG	NG	WN			4000K	13°	67%

III

IP54

CRI>90

L80B10
> 66.000h

MacAdam
Step 2

EXCL*

355°

25°

Ø105

									CCT	Beam	LOR
BUDDY L Tilt Tunable White	A569-01-17-		W N	WG	NG	WN			1800-4000K	29°	78%
	A569-01-18-		W N	WG	NG	WN			2700-5000K	29°	78%
	A569-01-27-		W N	WG	NG	WN			1800-4000K	41°	83%
	A569-01-28-		W N	WG	NG	WN			2700-5000K	41°	83%
	A569-01-37-		W N	WG	NG	WN			1800-4000K	51°	84%
	A569-01-38-		W N	WG	NG	WN			2700-5000K	51°	84%
BUDDY L Tilt DIM to warm	A569-02-39-		W N	WG	NG	WN			1800-3000K	56°	82%

III

IP54

CRI>90

L80B10
> 55.000h

MacAdam
Step 3

EXCL*

355°

25°

Ø105

○	BEAM	LOR
1	32°	76%
2	44°	82%
3	51°	85%

ACCESSORY

BUDDY L Trimless Accessory**

A569-10-90

MANDATORY FOR INSTALLATION

20

Ø105

Ø145

Ø112

97

25°

IP20

IP54

MIN 120

OPTIONAL ACCESSORIES

BUDDY L Tilt

BUDDY L Tilt Trimless

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

TRIMLESS TOOL D105 X D145mm

A478-00-06

Ø105

Ø145

COLOUR | W | N | WG | NG | WN | G | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS



BUDDY L Tilt Trimless

		CCT	Beam	LOR
BUDDY L Tilt Trimless	A569-10- 0 -0- W N G	2700K	32° / 44° / 51°	0
	A569-10- 0 -1- W N G	3000K	32° / 44° / 51°	0
	A569-10- 0 -3- W N G	3500K	32° / 44° / 51°	0
	A569-10- 0 -2- W N G	4000K	32° / 44° / 51°	0
BUDDY L Tilt Trimless Super Spot	A569-10-00- W N G	2700K	13°	67%
	A569-10-01- W N G	3000K	13°	67%
	A569-10-03- W N G	3500K	13°	67%
	A569-10-02- W N G	4000K	13°	67%

III

IP54

CRI>90

L80B10
> 66.000 h

MacAdam Step 2

EXCL*

EXCL**

25°

Ø105

		CCT	Beam	LOR
BUDDY L Tilt Trimless Tunable White	A569-11-17- W N G	1800-4000K	29°	78%
	A569-11-18- W N G	2700-5000K	29°	78%
	A569-11-27- W N G	1800-4000K	41°	83%
	A569-11-28- W N G	2700-5000K	41°	83%
	A569-11-37- W N G	1800-4000K	51°	84%
	A569-11-38- W N G	2700-5000K	51°	84%
BUDDY L Tilt Trimless DIM to warm	A569-12-39- W N G	1800-3000K	56°	82%

III

IP54

CRI>90

L80B10
> 55.000 h

MacAdam Step 3

EXCL*

EXCL**

25°

Ø105

0	BEAM	LOR
1	32°	76%
2	44°	82%
3	51°	85%

ACCESSORY

BUDDY L Trimless Accessory**

A569-10-90

MANDATORY FOR INSTALLATION

20

Ø145

Ø100

97

MIN 120

↑↑↑

IP54

OPTIONAL ACCESSORIES

BUDDY L Tilt

BUDDY L Tilt Trimless

High Chromatic LED

i» 361

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

TRIMLESS TOOL D105 X D145mm

A478-00-06










Ø105

Ø145

COLOUR | W | N | WG | NG | WN | G | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS

BUDDY L DRIVERS

*DRIVER OPTIONS				P	I	CCT	Flux
BUDDY L 1 Buddy L Buddy L Trimless Buddy L Tilt Buddy L Tilt Trimless		 NO DIM	0433-01-37	8,1W	250mA	2700K	1500 lm
						3000K	1560 lm
						3500K	1600 lm
						4000K	1600 lm
		 NO DIM	0433-00-21				
BUDDY L 2 Buddy L Buddy L Trimless Buddy L Tilt Buddy L Tilt Trimless		 DALI	0433-01-40	11,5W	350mA	2700K	2010 lm
						3000K	2090 lm
						3500K	2120 lm
						4000K	2120 lm
		 CASAMBI	0433-01-43				
		 PHASE CUT	0433-01-39				
BUDDY L Super Spot		 NO DIM	0433-01-38	11,6W	650mA	2700K	1430 lm
						3000K	1510 lm
						3500K	1570 lm
						4000K	1610 lm
		 CASAMBI	0434-01-98				
BUDDY L Tunable White		 DALI	0433-01-42	11,6W	350mA	1800-4000K	1270 lm
						2700-5000K	1630 lm
BUDDY L DIM to warm		 DALI	0433-01-40	11,6W	350mA	1800-3000K	1280 lm
		 CASAMBI	0433-01-43				
		 PHASE CUT	0433-01-39				

220
240 V~ | 48V PLEASE CONSULT

BUDDY
PURPOSEFUL
DESIGN

by **ARKOSLIGHT**