



BUDDY
PURPOSEFUL
DESIGN

ARKOSLIGHT



Compact and powerful

Innovative, state-of-the-art, super-efficient LED technology. Up to **200lm/W** luminous efficacy.

Buddy embodies the sophistication of downlight with its carefully crafted design and high-quality finishes. Compact aluminum body and precise lenses channel the full potential of this **new generation LED**.


Multiple fluxes and wattages available. Including **4W** for **800lm** and **11.5W** for **2120lm**.


One Buddy, multiple options

It has two installation modes: with a **light frame**, for fast and efficient installation; or **trimless**, for installation that is fully integrated into the architecture.

It also offers two additional versions: **fixed** or **tilting**. Highly functional, its Tilt version is fully adjustable. Thanks to its ability to tilt and swivel, once installed we can change its orientation with a simple manual adjustment.

Also available in different finishes.

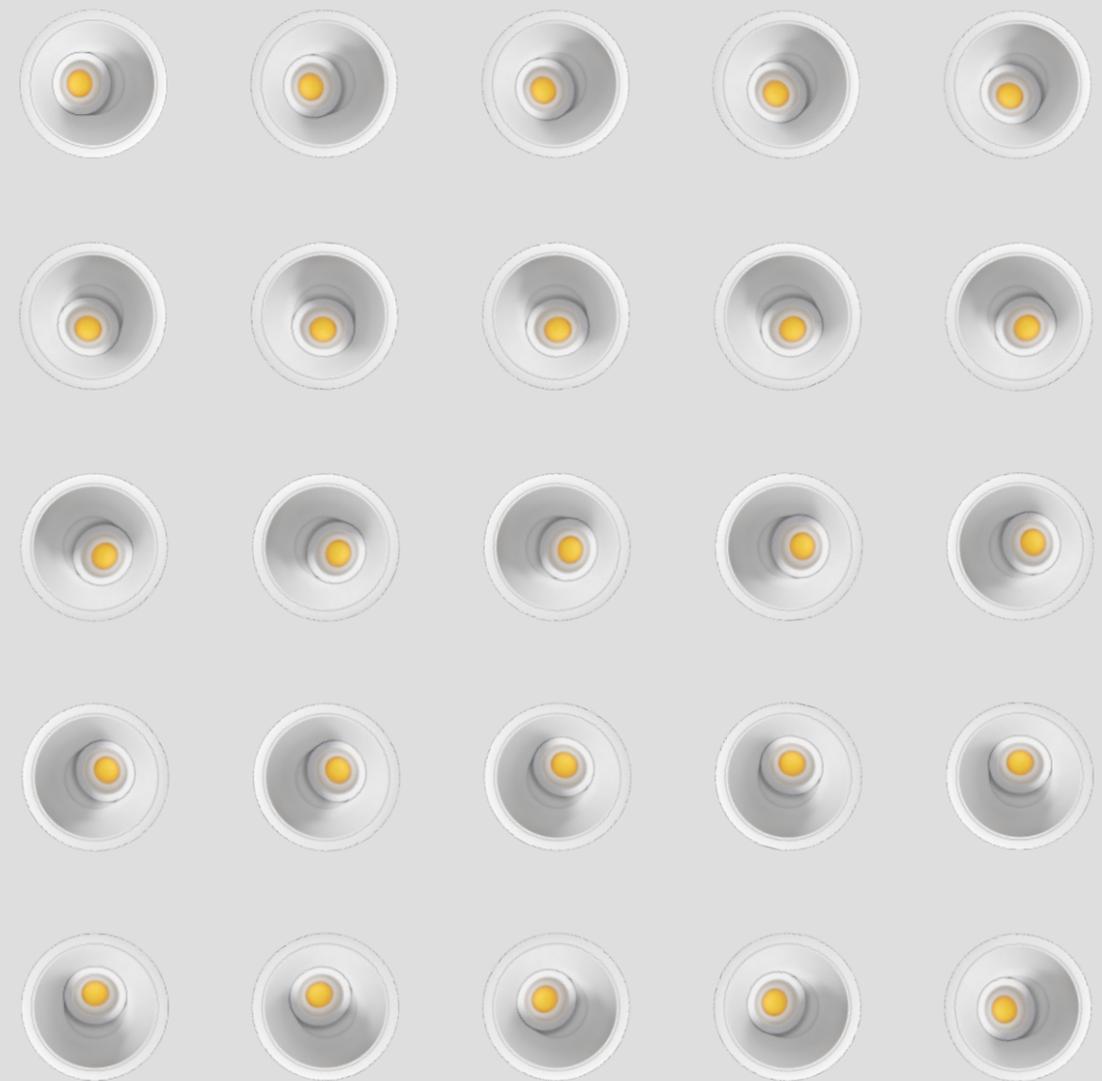

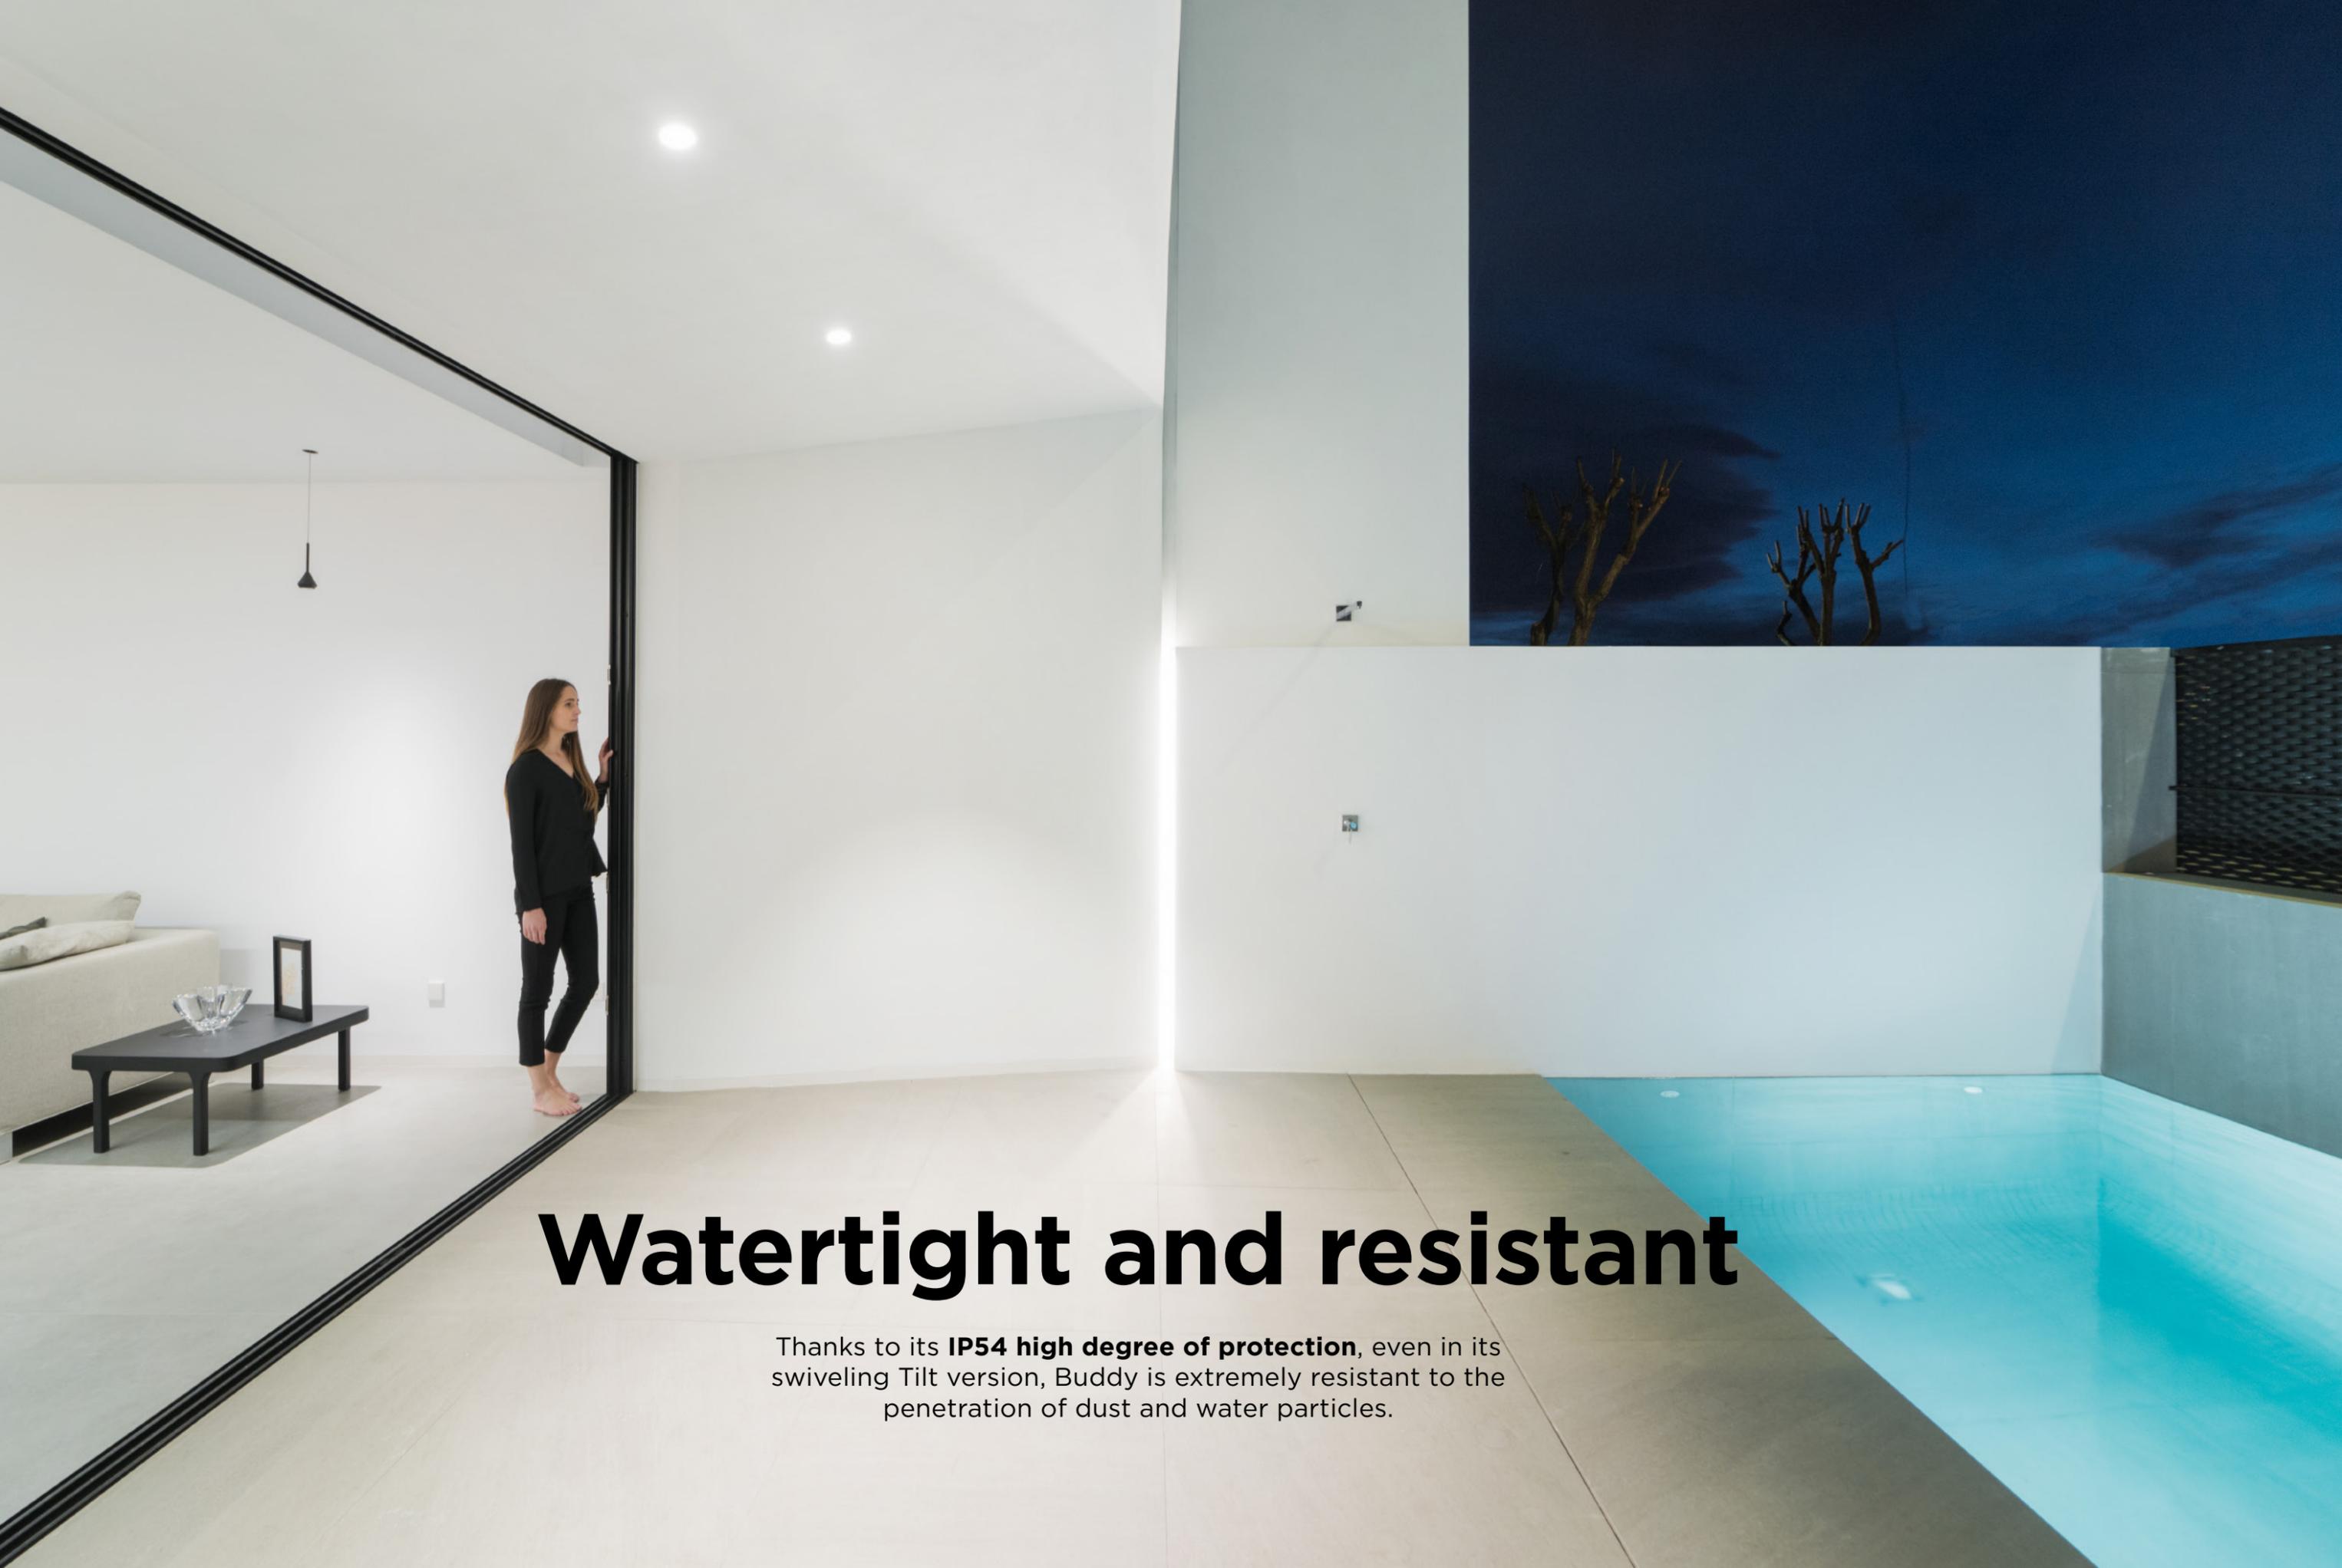

Watertight and resistant

Thanks to its **IP54 high degree of protection**, even in its swiveling Tilt version, Buddy is extremely resistant to the penetration of dust and water particles.




Freedom of illumination, freedom of use

The Buddy family offers exceptional versatility with three beam opening options: **spot** / **medium** / **flood** / plus a **12° / 13° super spot** version.

This makes it an adaptable downlight, ideal for both general and accent lighting. Buddy is highly technical.

Thanks to its LED, high quality lenses and anti-glare shade, it provides uniform light flow and comfortable glare levels, ensuring an optimal lighting experience in any environment.

BUDDY / BUDDY L

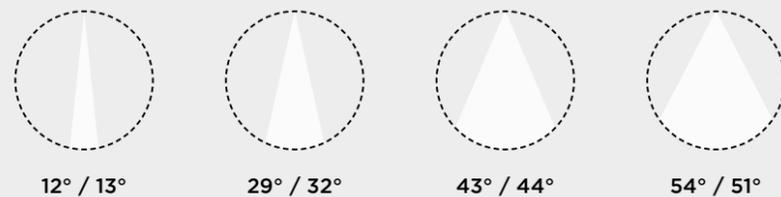

BUDDY / BUDDY L TUNABLE WHITE



Buddy Super Spot

Super controlled beam (12° / 13°). Designed for use as an accent light, Buddy Super Spot also maintains a uniform light output and high visual comfort.




Buddy Wall Washer

The virtue of the Buddy wall washer lies in its optical system which, as an alternative to the asymmetric projection of the adjustable recessed luminaire, provides a uniform vertical light distribution without interruptions or changes in intensity. No interruptions or intensity variations. Available in recessed and trimless versions and with Tunable White technology, which allows the intensity and colour temperature to be adjusted.






100% flux - 3000K

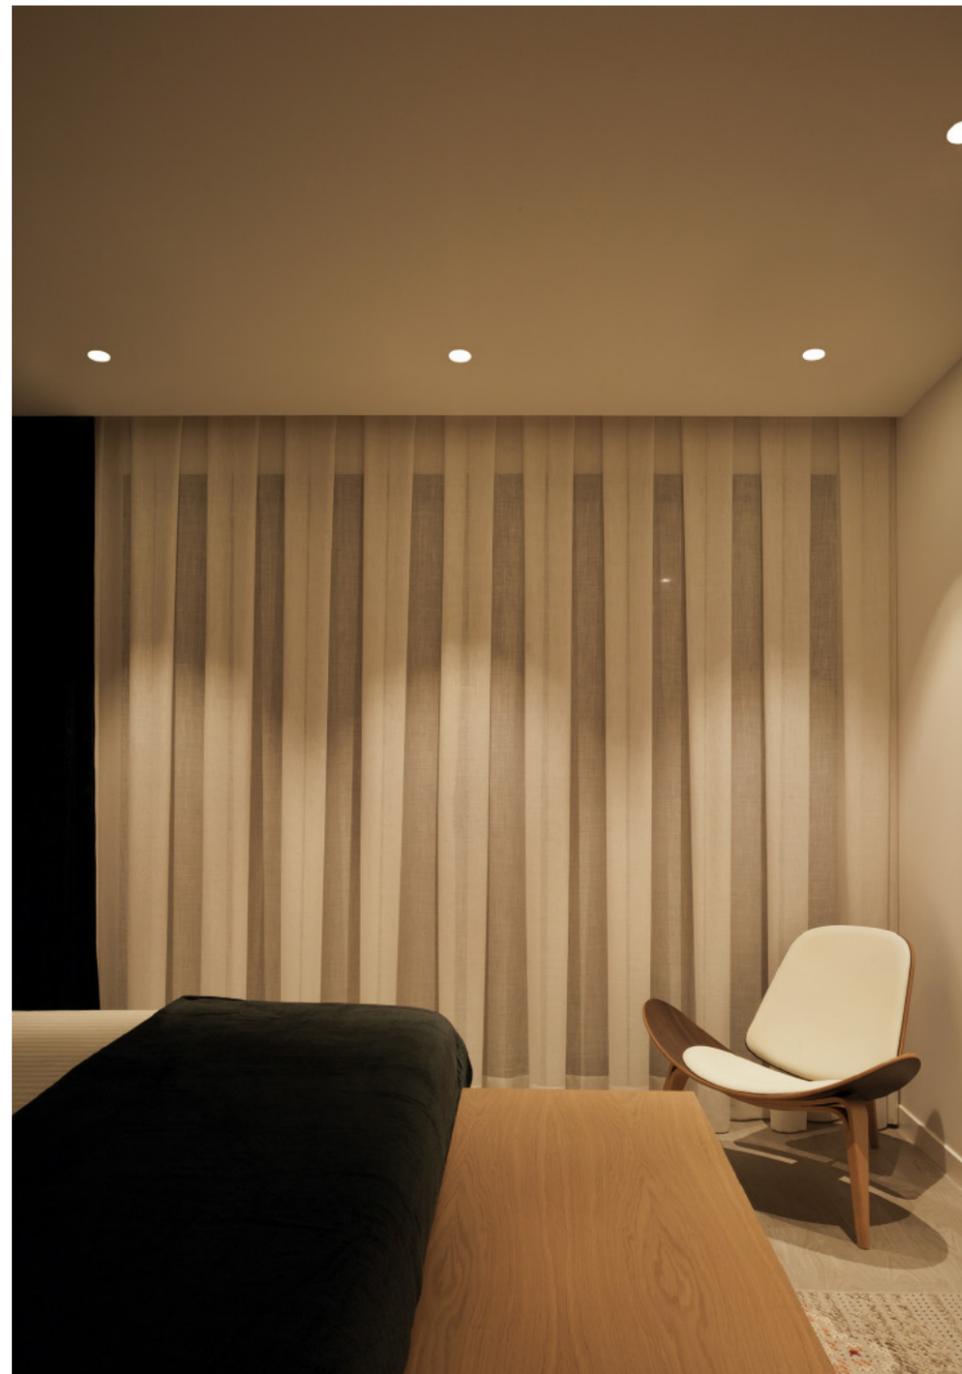

50% flux - 2400K

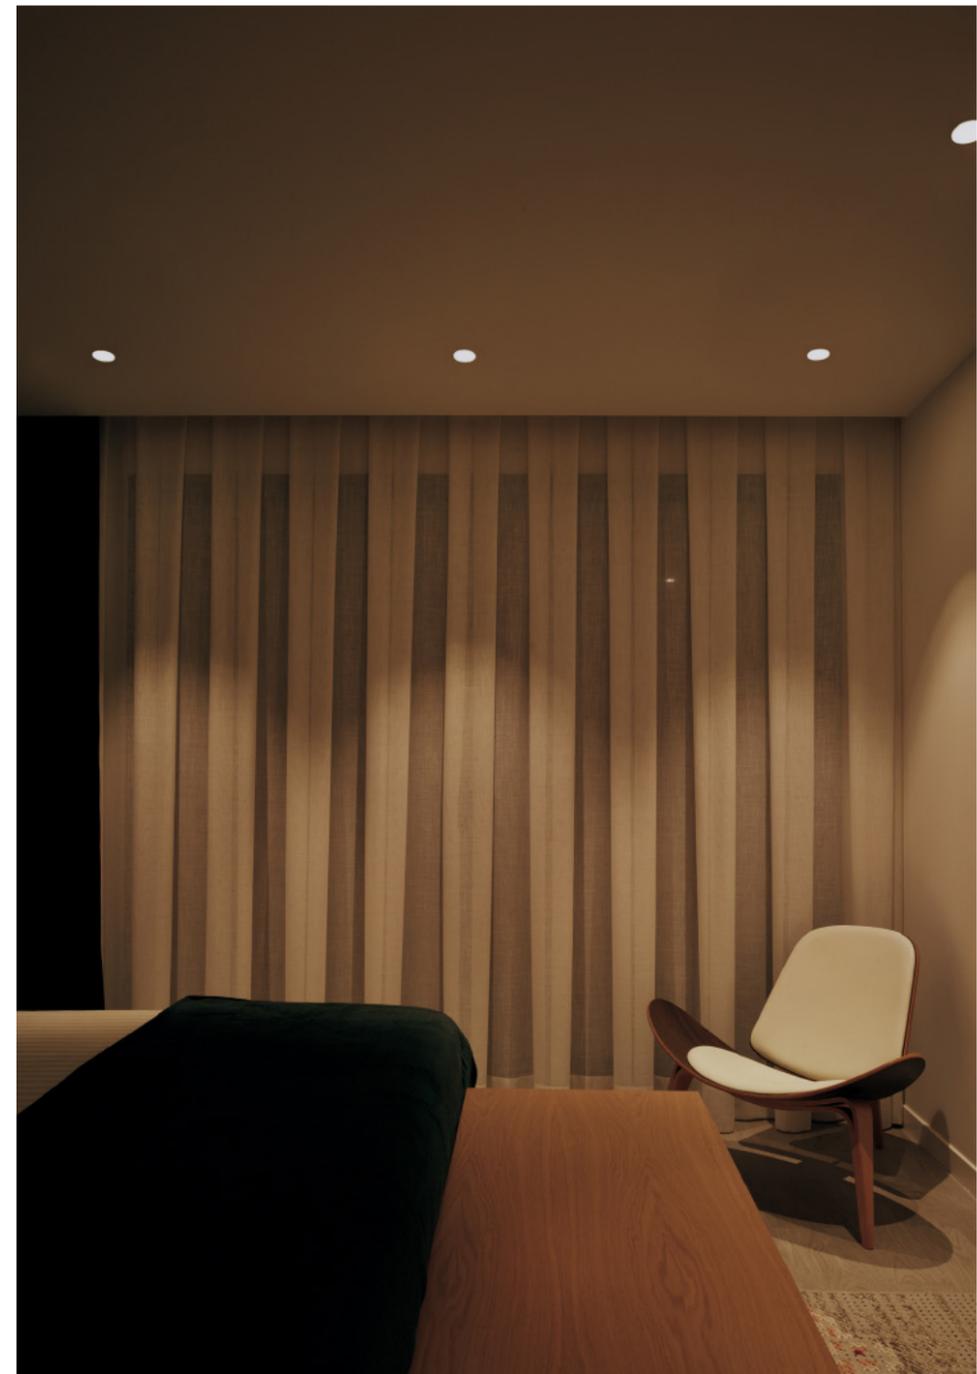

5% flux - 1800K

DIM to warm

At times of the day when activation and elevated biorhythms are desired, cool, abundant light is appropriate. Whereas, for periods when deactivation and relaxation are sought, warm temperature and essential light are most desirable.

Tunable white


Buddy Tunable White allows independent adjustment of colour temperature and light intensity, allowing total flexibility and reproduction of natural light throughout the day. This technology contributes to people's comfort and psychological well-being.



BUDDY
TECHNICAL
SPECIFICATIONS




VERSIONS



BUDDY



BUDDY TRIMLESS



BUDDY TILT



BUDDY TILT TRIMLESS



BUDDY WALL WASHER



BUDDY WALL WASHER TRIMLESS



BUDDY L



BUDDY L TRIMLESS



BUDDY L TILT



BUDDY L TILT TRIMLESS

FINISHES



W




W




W



W



N




N




N




N



WG



G



WN



NG



WN



BUDDY

		CCT	Beam	LOR
BUDDY	A507-00-0-0- W N WG NG WN	2700K	29° / 43° / 54°	○
	A507-00-0-1- W N WG NG WN	3000K	29° / 43° / 54°	○
	A507-00-0-3- W N WG NG WN	3500K	29° / 43° / 54°	○
	A507-00-0-2- W N WG NG WN	4000K	29° / 43° / 54°	○

III IP54 | CRI>90 | L80B10 >66,000h
 MacAdam Step 2
EXCL*
Ø79
UGR <19
▲

		CCT	Beam	LOR
BUDDY Super Spot	A507-00-00- W N WG NG WN	2700K	12°	62%
	A507-00-01- W N WG NG WN	3000K	12°	62%
	A507-00-03- W N WG NG WN	3500K	12°	62%
	A507-00-02- W N WG NG WN	4000K	12°	62%

III IP54 | CRI>90 | L80B10 >55,000h
 MacAdam Step 2
EXCL*
Ø79
UGR <19
▲

		CCT	Beam	LOR
BUDDY Tunable White	A507-01-17- W N WG NG WN	1800-4000K	28°	85%
	A507-01-18- W N WG NG WN	2700-5000K	28°	85%
	A507-01-27- W N WG NG WN	1800-4000K	43°	86%
	A507-01-28- W N WG NG WN	2700-5000K	43°	86%
	A507-01-37- W N WG NG WN	1800-4000K	55°	81%
	A507-01-38- W N WG NG WN	2700-5000K	55°	81%

III IP54 | CRI>90 | L80B10 >55,000h
 MacAdam Step 3
EXCL*
Ø79
UGR <19
▲

		CCT	Beam	LOR
BUDDY DIM to warm	A507-02-39- W N WG NG WN	1800-3000K	54°	75%

III IP54 | CRI>90 | L80B10 >55,000h
 MacAdam Step 3
EXCL*
Ø79
UGR <19
▲


○	BEAM	LOR
1	29°	82%
2	43°	83%
3	54°	80%

OPTIONAL ACCESSORY

BUDDY

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS



COLOUR | W □ | N ■ | WG □■ | NG ■■ | WN □■ | MATERIAL | AL | PC/PMMA

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
OTHER CCT OPTIONS PLEASE CONSULT



BUDDY Trimless

		CCT	Beam	LOR
BUDDY Trimless	A507-10-0-0- W N G	2700K	29° / 43° / 54°	○
	A507-10-0-1- W N G	3000K	29° / 43° / 54°	○
	A507-10-0-3- W N G	3500K	29° / 43° / 54°	○
	A507-10-0-2- W N G	4000K	29° / 43° / 54°	○

IP54 | CRI>90 | L80B10 > 66.000h
 MacAdam Step 2
 EXCL*
 EXCL**
 Ø79
 UGR <19

		CCT	Beam	LOR
BUDDY Trimless Super Spot	A507-10-00- W N G	2700K	12°	62%
	A507-10-01- W N G	3000K	12°	62%
	A507-10-03- W N G	3500K	12°	62%
	A507-10-02- W N G	4000K	12°	62%

IP54 | CRI>90 | L80B10 > 55.000h
 MacAdam Step 2
 EXCL*
 EXCL**
 Ø79
 UGR <19

		CCT	Beam	LOR
BUDDY Trimless Tunable White	A507-11-17- W N G	1800-4000K	28°	85%
	A507-11-18- W N G	2700-5000K	28°	85%
	A507-11-27- W N G	1800-4000K	43°	86%
	A507-11-28- W N G	2700-5000K	43°	86%
	A507-11-37- W N G	1800-4000K	55°	81%
	A507-11-38- W N G	2700-5000K	55°	81%

IP54 | CRI>90 | L80B10 > 55.000h
 MacAdam Step 3
 EXCL*
 EXCL**
 Ø79
 UGR <19




		CCT	Beam	LOR
BUDDY Trimless DIM to warm	A507-12-39- W N G	1800-3000K	54°	75%

IP54 | CRI>90 | L80B10 > 55.000h
 MacAdam Step 3
 EXCL*
 EXCL**
 Ø79
 UGR <19

○	BEAM	LOR
1	29°	82%
2	43°	83%
3	54°	80%

ACCESSORY
BUDDY Trimless Accessory**
A507-10-90
 MANDATORY FOR INSTALLATION

OPTIONAL ACCESSORIES
BUDDY Trimless
High Chromatic LED
 NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS



COLOUR | W □ | N ■ | G ■ | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
OTHER CCT OPTIONS PLEASE CONSULT



BUDDY Tilt

		CCT	Beam	LOR
BUDDY Tilt	A508-00-0-0-	2700K	29° / 43° / 54°	○
	A508-00-0-1-	3000K	29° / 43° / 54°	○
	A508-00-0-3-	3500K	29° / 43° / 54°	○
	A508-00-0-2-	4000K	29° / 43° / 54°	○

III IP54 | CRI>90 | L80B10 >66.000h
 MacAdam Step 2
EXCL*
355°
25°
Ø79
▲

		CCT	Beam	LOR
BUDDY Tilt Super Spot	A508-00-00-	2700K	12°	62%
	A508-00-01-	3000K	12°	62%
	A508-00-03-	3500K	12°	62%
	A508-00-02-	4000K	12°	62%

III IP54 | CRI>90 | L80B10 >55.000h
 MacAdam Step 2
EXCL*
355°
25°
Ø79
▲

		CCT	Beam	LOR
BUDDY Tilt Tunable White	A508-01-17-	1800-4000K	28°	85%
	A508-01-18-	2700-5000K	28°	85%
	A508-01-27-	1800-4000K	43°	86%
	A508-01-28-	2700-5000K	43°	86%
	A508-01-37-	1800-4000K	55°	81%
	A508-01-38-	2700-5000K	55°	81%

III IP54 | CRI>90 | L80B10 >55.000h
 MacAdam Step 3
EXCL*
355°
25°
Ø79
▲

		CCT	Beam	LOR
BUDDY Tilt DIM to warm	A508-02-39-	1800-3000K	54°	75%

III IP54 | CRI>90 | L80B10 >55.000h
 MacAdam Step 3
EXCL*
355°
25°
Ø79
▲


○	BEAM	LOR
1	29°	82%
2	43°	83%
3	54°	80%

OPTIONAL ACCESSORY

BUDDY Tilt

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS



COLOUR | W □ | N ■ | WG □ | NG ■ | WN □ | MATERIAL | AL | PC/PMMA

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
OTHER CCT OPTIONS PLEASE CONSULT



BUDDY Tilt Trimless

		CCT	Beam	LOR
BUDDY Tilt Trimless	A508-10-0-0- W N G	2700K	29° / 43° / 54°	○
	A508-10-0-1- W N G	3000K	29° / 43° / 54°	○
	A508-10-0-3- W N G	3500K	29° / 43° / 54°	○
	A508-10-0-2- W N G	4000K	29° / 43° / 54°	○

IP54 | CRI>90 | L80B10 >66.000h
 MacAdam Step 2
 EXCL*
 EXCL**
 25°
 Ø79

		CCT	Beam	LOR
BUDDY Tilt Trimless Super Spot	A508-10-00- W N G	2700K	12°	62%
	A508-10-01- W N G	3000K	12°	62%
	A508-10-03- W N G	3500K	12°	62%
	A508-10-02- W N G	4000K	12°	62%

IP54 | CRI>90 | L80B10 >55.000h
 MacAdam Step 2
 EXCL*
 EXCL**
 25°
 Ø79

		CCT	Beam	LOR
BUDDY Tilt Trimless Tunable White	A508-11-17- W N G	1800-4000K	28°	85%
	A508-11-18- W N G	2700-5000K	28°	85%
	A508-11-27- W N G	1800-4000K	43°	86%
	A508-11-28- W N G	2700-5000K	43°	86%
	A508-11-37- W N G	1800-4000K	55°	81%
	A508-11-38- W N G	2700-5000K	55°	81%

IP54 | CRI>90 | L80B10 >55.000h
 MacAdam Step 3
 EXCL*
 EXCL**
 25°
 Ø79


		CCT	Beam	LOR
BUDDY Tilt Trimless DIM to warm	A508-12-39- W N G	1800-3000K	54°	75%

IP54 | CRI>90 | L80B10 >55.000h
 MacAdam Step 3
 EXCL*
 EXCL**
 25°
 Ø79

○	BEAM	LOR
1	29°	82%
2	43°	83%
3	54°	80%

ACCESSORY
BUDDY Tilt Trimless Accessory**
A508-10-90
 MANDATORY FOR INSTALLATION

OPTIONAL ACCESSORIES
BUDDY Tilt Trimless
High Chromatic LED
 NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

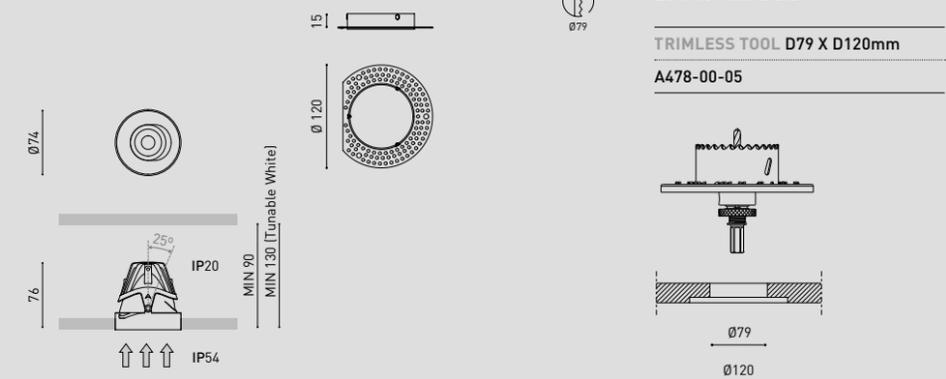

COLOUR | W □ | N ■ | G ■ | MATERIAL | AL | PC/PMMA

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
 OTHER CCT OPTIONS PLEASE CONSULT



BUDDY Wall Washer

		CCT	LOR
BUDDY Wall Washer	A509-00-10- W N WN	2700K	48%
	A509-00-11- W N WN	3000K	48%
	A509-00-13- W N WN	3500K	48%
	A509-00-12- W N WN	4000K	48%

III IP20 | CRI>90 | L80B10 >66,000h



		CCT	LOR
BUDDY Wall Washer Tunable White	A509-01-17- W N WN	1800-4000K	49%
	A509-01-18- W N WN	2700-5000K	49%

III IP20 | CRI>90 | L80B10 >55,000h




OPTIONAL ACCESSORY

BUDDY WALL WASHER

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS



COLOUR | W □ | N ■ | WN □ ■ | MATERIAL | AL | PMMA

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
OTHER CCT & DIM OPTIONS PLEASE CONSULT



BUDDY Wall Washer Trimless

			CCT	LOR
BUDDY Wall Washer Trimless	A509-10-10-	W N	2700K	48%
	A509-10-11-	W N	3000K	48%
	A509-10-13-	W N	3500K	48%
	A509-10-12-	W N	4000K	48%

III IP20 | CRI>90 | L80B10 >66,000h



			CCT	LOR
BUDDY Wall Washer Trimless Tunable White	A509-11-17-	W N	1800-4000K	49%
	A509-11-18-	W N	2700-5000K	49%

III IP20 | CRI>90 | L80B10 >55,000h




ACCESSORY

BUDDY WALL WASHER

Trimless Accessory**

A509-10-90

MANDATORY FOR INSTALLATION



OPTIONAL ACCESSORIES




BUDDY Tilt Trimless

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

TRIMLESS TOOL D79 X D120mm


A478-00-05



COLOUR | W □ | N ■ | MATERIAL | AL | PMMA

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
OTHER CCT & DIM OPTIONS PLEASE CONSULT

BUDDY DRIVERS

*DRIVER OPTIONS				P	I	CCT	Flux				
BUDDY 1 Buddy Buddy Trimless Buddy Tilt Buddy Tilt Trimless		 NO DIM	0434-01-85	4W	125mA	2700K	760 lm				
						3000K	790 lm				
						3500K	795 lm				
						4000K	800 lm				
BUDDY 2 Buddy Buddy Trimless Buddy Tilt Buddy Tilt Trimless Buddy Wall Washer Buddy Wall Washer Trimless		 NO DIM	0434-01-86	6,6W	200mA						
						 DALI	0434-01-89	2700K	1150 lm		
								3000K	1200 lm		
								3500K	1210 lm		
								4000K	1220 lm		
 CASAMBI	0434-01-91										
 PHASE CUT	0434-01-92										
BUDDY Super Spot		 NO DIM	0434-01-87	6W	500mA	2700K	750 lm				
						3000K	790 lm				
 DALI	0434-01-88										
		3500K	825 lm								
		4000K	845 lm								
BUDDY Tunable White		 DALI	0434-01-90	6,7W	400mA	1800-4000K	690 lm				
						2700-5000K	815 lm				
BUDDY DIM to warm		 DALI	0434-01-94	6W	350mA	1800-3000K	650 lm				
								 PHASE CUT	0434-01-95		
BUDDY Wall Washer Tunable White		 DALI	0434-01-96	8,4W	500mA	1800-4000K	830 lm				
						2700-5000K	1000 lm				

220
240 V~ | 48V PLEASE CONSULT



BUDDY L

						CCT	Beam	LOR	
BUDDY L	A568-00-0-0-	W	N	WG	NG	WN	2700K	32° / 44° / 51°	○
	A568-00-0-1-	W	N	WG	NG	WN	3000K	32° / 44° / 51°	○
	A568-00-0-3-	W	N	WG	NG	WN	3500K	32° / 44° / 51°	○
	A568-00-0-2-	W	N	WG	NG	WN	4000K	32° / 44° / 51°	○
BUDDY L Super Spot	A568-00-00-	W	N	WG	NG	WN	2700K	13°	67%
	A568-00-01-	W	N	WG	NG	WN	3000K	13°	67%
	A568-00-03-	W	N	WG	NG	WN	3500K	13°	67%
	A568-00-02-	W	N	WG	NG	WN	4000K	13°	67%

III IP54 | CRI>90 | L80B10 >66,000h



						CCT	Beam	LOR	
BUDDY L Tunable White	A568-01-17-	W	N	WG	NG	WN	1800-4000K	29°	78%
	A568-01-18-	W	N	WG	NG	WN	2700-5000K	29°	78%
	A568-01-27-	W	N	WG	NG	WN	1800-4000K	41°	83%
	A568-01-28-	W	N	WG	NG	WN	2700-5000K	41°	83%
	A568-01-37-	W	N	WG	NG	WN	1800-4000K	51°	84%
	A568-01-38-	W	N	WG	NG	WN	2700-5000K	51°	84%
BUDDY L DIM to warm	A568-02-39-	W	N	WG	NG	WN	1800-3000K	56°	82%

III IP54 | CRI>90 | L80B10 >55,000h





○	BEAM	LOR
1	32°	76%
2	44°	82%
3	51°	85%

ACCESSORY

BUDDY L Trimless Accessory**

A568-10-90

MANDATORY FOR INSTALLATION



OPTIONAL ACCESSORIES

BUDDY L



BUDDY L Trimless

High Chromatic LED ⓘ » 361

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

TRIMLESS TOOL D105 X D145mm

A478-00-06



COLOUR | W □ | N ■ | WG □ | NG ■ | WN □ | G ■ | MATERIAL | AL | PC/PMMA

COLOURS MAY AFFECT THE LIGHTING PARAMETERS



BUDDY L Trimless

		CCT	Beam	LOR
BUDDY L Trimless	A568-10-0-0- W N G	2700K	32° / 44° / 51°	○
	A568-10-0-1- W N G	3000K	32° / 44° / 51°	○
	A568-10-0-3- W N G	3500K	32° / 44° / 51°	○
	A568-10-0-2- W N G	4000K	32° / 44° / 51°	○
BUDDY L Trimless Super Spot	A568-10-00- W N G	2700K	13°	67%
	A568-10-01- W N G	3000K	13°	67%
	A568-10-03- W N G	3500K	13°	67%
	A568-10-02- W N G	4000K	13°	67%

III IP54 | CRI>90 | L80B10 >66.000h



		CCT	Beam	LOR
BUDDY L Trimless Tunable White	A568-11-17- W N G	1800-4000K	29°	78%
	A568-11-18- W N G	2700-5000K	29°	78%
	A568-11-27- W N G	1800-4000K	41°	83%
	A568-11-28- W N G	2700-5000K	41°	83%
	A568-11-37- W N G	1800-4000K	51°	84%
	A568-11-38- W N G	2700-5000K	51°	84%
BUDDY L Trimless DIM to warm	A568-12-39- W N G	1800-3000K	56°	82%

III IP54 | CRI>90 | L80B10 >55.000h






○	BEAM	LOR
1	32°	76%
2	44°	82%
3	51°	85%

ACCESSORY

BUDDY L Trimless Accessory**

A568-10-90

MANDATORY FOR INSTALLATION



OPTIONAL ACCESSORIES

BUDDY L


BUDDY L Trimless

High Chromatic LED ⓘ » 361

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

TRIMLESS TOOL D105 X D145mm

A478-00-06



COLOUR | W □ | N ■ | WG □ | NG ■ | WN □ | G ■ | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS



BUDDY L Tilt

						CCT	Beam	LOR	
BUDDY L Tilt	A569-00-0-0-	W	N	WG	NG	WN	2700K	32°/44°/51°	○
	A569-00-0-1-	W	N	WG	NG	WN	3000K	32°/44°/51°	○
	A569-00-0-3-	W	N	WG	NG	WN	3500K	32°/44°/51°	○
	A569-00-0-2-	W	N	WG	NG	WN	4000K	32°/44°/51°	○
BUDDY L Tilt Super Spot	A569-00-00-	W	N	WG	NG	WN	2700K	13°	67%
	A569-00-01-	W	N	WG	NG	WN	3000K	13°	67%
	A569-00-03-	W	N	WG	NG	WN	3500K	13°	67%
	A569-00-02-	W	N	WG	NG	WN	4000K	13°	67%

III IP54 | CRI>90 | L80B10 >66,000h



						CCT	Beam	LOR	
BUDDY L Tilt Tunable White	A569-01-17-	W	N	WG	NG	WN	1800-4000K	29°	78%
	A569-01-18-	W	N	WG	NG	WN	2700-5000K	29°	78%
	A569-01-27-	W	N	WG	NG	WN	1800-4000K	41°	83%
	A569-01-28-	W	N	WG	NG	WN	2700-5000K	41°	83%
	A569-01-37-	W	N	WG	NG	WN	1800-4000K	51°	84%
	A569-01-38-	W	N	WG	NG	WN	2700-5000K	51°	84%
BUDDY L Tilt DIM to warm	A569-02-39-	W	N	WG	NG	WN	1800-3000K	56°	82%

III IP54 | CRI>90 | L80B10 >55,000h





○	BEAM	LOR
1	32°	76%
2	44°	82%
3	51°	85%

ACCESSORY

BUDDY L Trimless Accessory**

A569-10-90

MANDATORY FOR INSTALLATION



OPTIONAL ACCESSORIES

BUDDY L Tilt


BUDDY L Tilt Trimless

High Chromatic LED ⓘ » 361

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

TRIMLESS TOOL D105 X D145mm

A478-00-06



COLOUR | W □ | N ■ | WG □ | NG ■ | WN □ | G ■ | MATERIAL | AL | PC/PMMA

COLOURS MAY AFFECT THE LIGHTING PARAMETERS



BUDDY L Tilt Trimless

		CCT	Beam	LOR
BUDDY L Tilt Trimless	A569-10-0-0- W N G	2700K	32°/44°/51°	○
	A569-10-0-1- W N G	3000K	32°/44°/51°	○
	A569-10-0-3- W N G	3500K	32°/44°/51°	○
	A569-10-0-2- W N G	4000K	32°/44°/51°	○
BUDDY L Tilt Trimless Super Spot	A569-10-00- W N G	2700K	13°	67%
	A569-10-01- W N G	3000K	13°	67%
	A569-10-03- W N G	3500K	13°	67%
	A569-10-02- W N G	4000K	13°	67%

IP54 | CRI>90 | L80B10 >66.000h

 MacAdam Step 2
 EXCL*
 EXCL**
 25°
 Ø105

		CCT	Beam	LOR
BUDDY L Tilt Trimless Tunable White	A569-11-17- W N G	1800-4000K	29°	78%
	A569-11-18- W N G	2700-5000K	29°	78%
	A569-11-27- W N G	1800-4000K	41°	83%
	A569-11-28- W N G	2700-5000K	41°	83%
	A569-11-37- W N G	1800-4000K	51°	84%
	A569-11-38- W N G	2700-5000K	51°	84%
BUDDY L Tilt Trimless DIM to warm	A569-12-39- W N G	1800-3000K	56°	82%


IP54 | CRI>90 | L80B10 >55.000h

 MacAdam Step 3
 EXCL*
 EXCL**
 25°
 Ø105

○	BEAM	LOR
1	32°	76%
2	44°	82%
3	51°	85%

ACCESSORY
BUDDY L Trimless Accessory**
A569-10-90
 MANDATORY FOR INSTALLATION



OPTIONAL ACCESSORIES
BUDDY L Tilt
BUDDY L Tilt Trimless
High Chromatic LED ⓘ 361
 NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

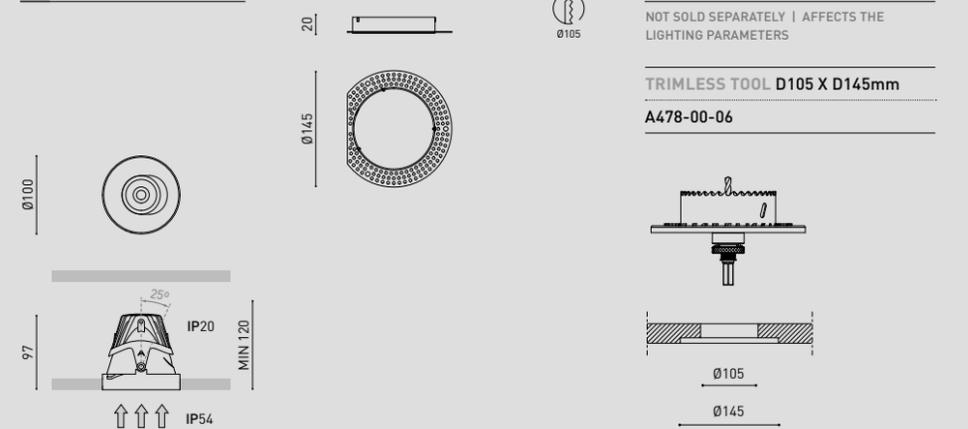

COLOUR | W □ | N ■ | WG □ | NG ■ | WN □ | G ■ | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS

BUDDY L DRIVERS

*DRIVER OPTIONS				P	I	CCT	Flux			
BUDDY L 1 Buddy L Buddy L Trimless Buddy L Tilt Buddy L Tilt Trimless		NO DIM	0433-01-37	8,1W	250mA	2700K	1500 lm			
						3000K	1560 lm			
						3500K	1600 lm			
						4000K	1600 lm			
		NO DIM	0433-00-21							
BUDDY L 2 Buddy L Buddy L Trimless Buddy L Tilt Buddy L Tilt Trimless		DALI	0433-01-40	11,5W	350mA	2700K	2010 lm			
						3000K	2090 lm			
						3500K	2120 lm			
						4000K	2120 lm			
		CASAMBI	0433-01-43							
		PHASE CUT	0433-01-39							
BUDDY L Super Spot		NO DIM	0433-01-38	11,6W	650mA	2700K	1430 lm			
						3000K	1510 lm			
						3500K	1570 lm			
						4000K	1610 lm			
		DALI	0433-01-41							
		CASAMBI	0434-01-98							
BUDDY L Tunable White		DALI	0433-01-42	11,6W	350mA	1800-4000K	1270 lm			
						2700-5000K	1630 lm			
BUDDY L DIM to warm		DALI	0433-01-40	11,6W	350mA	1800-3000K	1280 lm			
									CASAMBI	0433-01-43

220
240 V~ | 48V PLEASE CONSULT

BUDDY
PURPOSEFUL
DESIGN

by **ARKOSLIGHT**