



BUDDY
PURPOSEFUL
DESIGN

ARKOSLIGHT



Compatto e performante

Innovativa tecnologia LED all'avanguardia estremamente efficiente. Capace di fornire un'efficacia luminosa fino a **200lm/W**.

Buddy incarna l'eleganza del downlight con il suo design attentamente elaborato e le sue finiture di alta qualità. Il corpo compatto in alluminio e le lenti precise canalizzano tutto il potenziale di questa **nuova generazione di LED**.

Sono disponibili molteplici flussi e potenze, tra cui spiccano **4W** per **800lm** e **11,5W** per **2120lm**.

Un Buddy, molteplici opzioni

Dispone di due modalità di installazione: con una **cornice leggera**, per un'installazione rapida ed efficace; o **senza cornice** (trimless), per un'installazione completamente integrata nell'architettura.

Inoltre, offre due varianti aggiuntive: **fissa** o **basculante**. Estremamente funzionale, la sua versione Tilt è completamente orientabile. Grazie alla possibilità di inclinazione e rotazione, una volta installato, possiamo, con una semplice regolazione manuale, cambiare il suo orientamento.

Disponibile in diverse finiture.



A modern interior space with a large glass wall and a swimming pool at night. A woman in black clothing stands by the glass wall, looking out. The room is brightly lit with recessed ceiling lights. The pool is illuminated with blue lights, and the sky is dark with some clouds and bare trees visible through the glass.

Stagno e resistente

Grazie al suo elevato grado di **protezione IP54**, anche nella sua versione orientabile Tilt, Buddy è straordinariamente resistente alla penetrazione di particelle di polvere e acqua.




Libertà di scenografie

La famiglia Buddy offre una versatilità eccezionale con tre opzioni di apertura del fascio luminoso: **Spot / Medium / Flood** / oltre a una versione **Super Spot 12° / 13°**.

Ciò lo rende un downlight versatile, ideale per soddisfare sia le esigenze di illuminazione generale che di accentuazione. Inoltre, Buddy è altamente tecnico.

Grazie al suo LED, lenti di alta qualità e schermo antiabbagliante, è in grado di garantire un flusso luminoso uniforme e livelli bassi di abbagliamento (glare), garantendo un'esperienza di illuminazione ottimale in qualsiasi ambiente.

BUDDY / BUDDY L

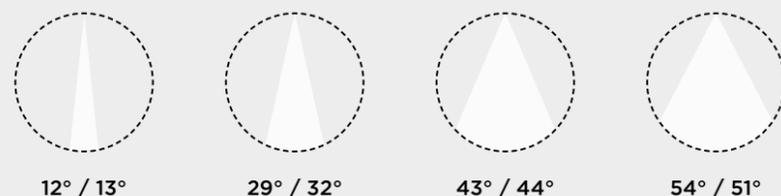

BUDDY / BUDDY L TUNABLE WHITE



Buddy Super Spot

Apertura del fascio luminoso estremamente controllata (12° / 13°).
Pensato per essere utilizzato come luce d'accento, Buddy
Super Spot mantiene anche un flusso luminoso uniforme e un
confort visivo ottimale.




Buddy Wall Washer

La virtù del Buddy wall washer risiede nel suo sistema ottico che, come alternativa alla proiezione asimmetrica del faretto orientabile incassato, permette una distribuzione della luce verticale uniforme, senza interruzioni né variazioni di intensità. Disponibile nelle versioni recessed e trimless, con tecnologia 'Tunable White', che consente di regolare sia l'intensità che la temperatura colore.






100% flux - 3000K

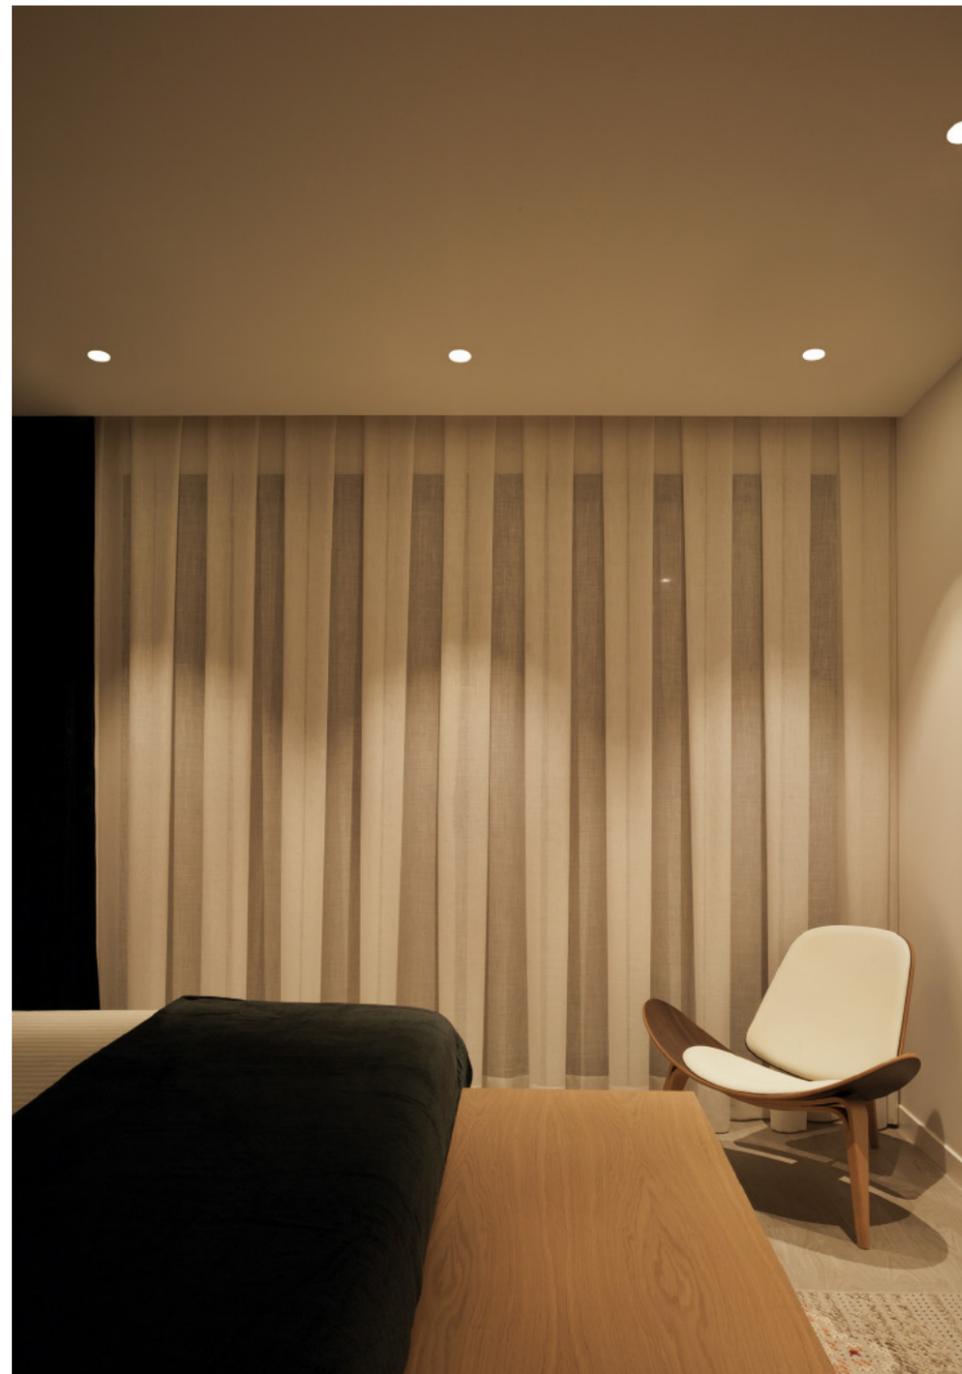

50% flux - 2400K

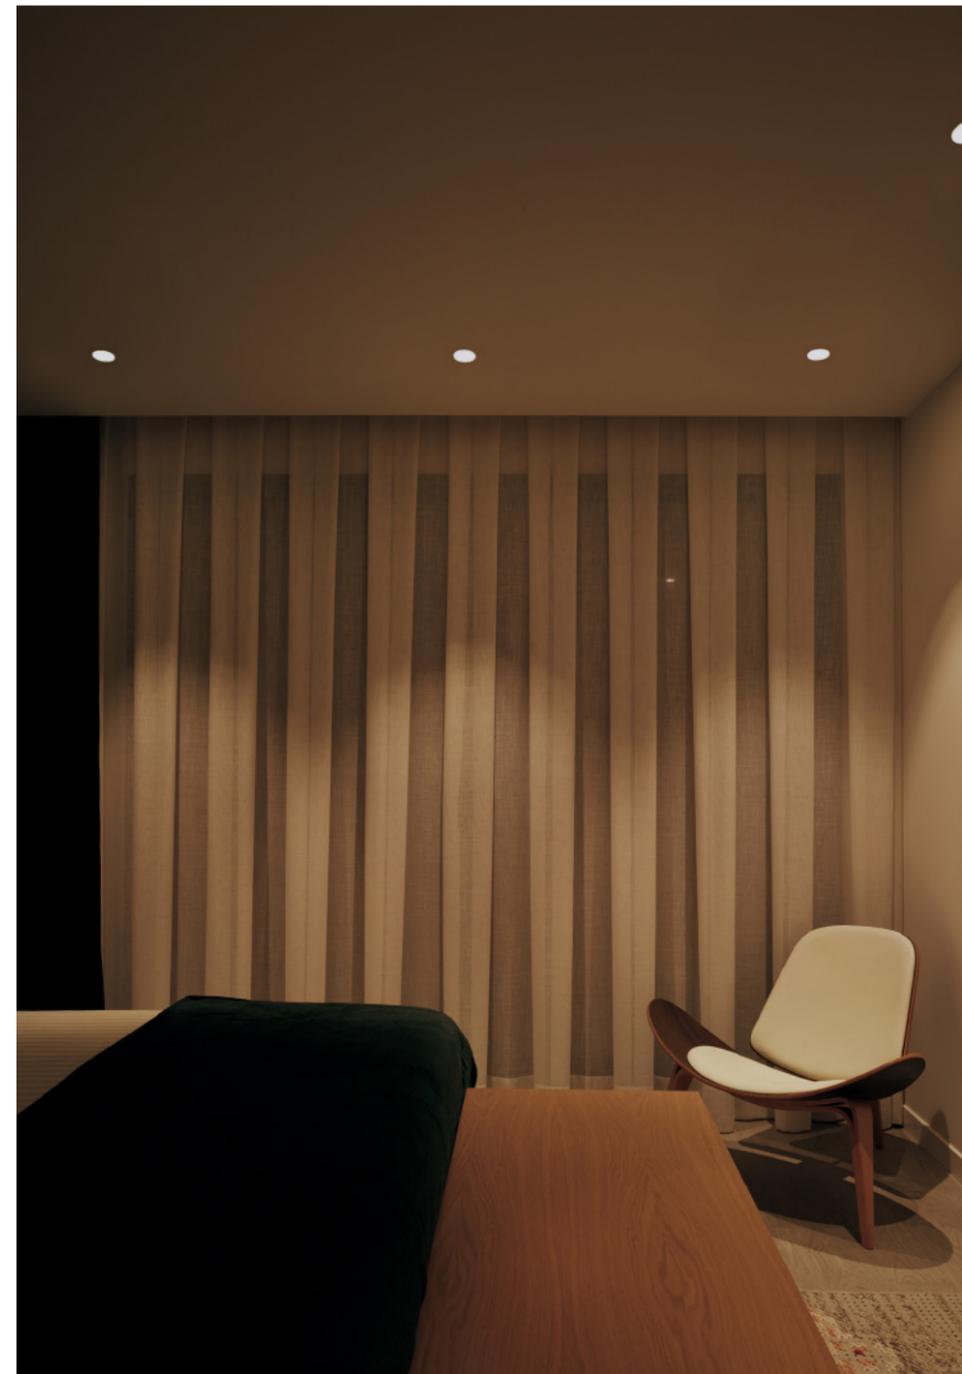

5% flux - 1800K

DIM to warm

Per i momenti della giornata in cui si cerca l'attivazione e i bioritmi elevati, la luce fredda e abbondante è adatta. Al contrario, nelle ore in cui si cerca la disattivazione e il relax, la temperatura calda e la luce strettamente necessaria sono le caratteristiche desiderate.

Tunable white

Buddy Tunable White consente di regolare in maniera indipendente la temperatura colore e l'intensità della luce, consentendo una flessibilità totale e la riproduzione della luce naturale durante il corso della giornata. Questa tecnologia contribuisce al comfort e al benessere psicologico delle persone.




BUDDY
SPECIFICHE
TECNICHE



VERSIONI



BUDDY



BUDDY TRIMLESS



BUDDY TILT



BUDDY TILT TRIMLESS



BUDDY WALL WASHER




BUDDY WALL WASHER TRIMLESS



BUDDY L



BUDDY L TRIMLESS



BUDDY L TILT



BUDDY L TILT TRIMLESS

FINITURE



W



W



W



W



N




N




N



N




WG



G



WN



NG



WN



BUDDY

		CCT	Beam	LOR
BUDDY	A507-00-0-0-	2700K	29° / 43° / 54°	○
	A507-00-0-1-	3000K	29° / 43° / 54°	○
	A507-00-0-3-	3500K	29° / 43° / 54°	○
	A507-00-0-2-	4000K	29° / 43° / 54°	○

III IP54 | CRI>90 | L80B10 >66,000h
 MacAdam Step 2
EXCL*
Ø79
UGR <19
▲

		CCT	Beam	LOR
BUDDY Super Spot	A507-00-00-	2700K	12°	62%
	A507-00-01-	3000K	12°	62%
	A507-00-03-	3500K	12°	62%
	A507-00-02-	4000K	12°	62%

III IP54 | CRI>90 | L80B10 >55,000h
 MacAdam Step 2
EXCL*
Ø79
UGR <19
▲

		CCT	Beam	LOR
BUDDY Tunable White	A507-01-17-	1800-4000K	28°	85%
	A507-01-18-	2700-5000K	28°	85%
	A507-01-27-	1800-4000K	43°	86%
	A507-01-28-	2700-5000K	43°	86%
	A507-01-37-	1800-4000K	55°	81%
	A507-01-38-	2700-5000K	55°	81%

III IP54 | CRI>90 | L80B10 >55,000h
 MacAdam Step 3
EXCL*
Ø79
UGR <19
▲

		CCT	Beam	LOR
BUDDY DIM to warm	A507-02-39-	1800-3000K	54°	75%

III IP54 | CRI>90 | L80B10 >55,000h
 MacAdam Step 3
EXCL*
Ø79
UGR <19
▲


○	BEAM	LOR
1	29°	82%
2	43°	83%
3	54°	80%

OPTIONAL ACCESSORY

BUDDY

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS



COLOUR | W □ | N ■ | WG □■ | NG ■■ | WN □■ | MATERIAL | AL | PC/PMMA

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
OTHER CCT OPTIONS PLEASE CONSULT



BUDDY Trimless

		CCT	Beam	LOR
BUDDY Trimless	A507-10-0-0- W N G	2700K	29° / 43° / 54°	○
	A507-10-0-1- W N G	3000K	29° / 43° / 54°	○
	A507-10-0-3- W N G	3500K	29° / 43° / 54°	○
	A507-10-0-2- W N G	4000K	29° / 43° / 54°	○

IP54 | CRI>90 | L80B10 > 66.000h
 MacAdam Step 2
 EXCL*
 EXCL**
 Ø79
 UGR <19

		CCT	Beam	LOR
BUDDY Trimless Super Spot	A507-10-00- W N G	2700K	12°	62%
	A507-10-01- W N G	3000K	12°	62%
	A507-10-03- W N G	3500K	12°	62%
	A507-10-02- W N G	4000K	12°	62%

IP54 | CRI>90 | L80B10 > 55.000h
 MacAdam Step 2
 EXCL*
 EXCL**
 Ø79
 UGR <19

		CCT	Beam	LOR
BUDDY Trimless Tunable White	A507-11-17- W N G	1800-4000K	28°	85%
	A507-11-18- W N G	2700-5000K	28°	85%
	A507-11-27- W N G	1800-4000K	43°	86%
	A507-11-28- W N G	2700-5000K	43°	86%
	A507-11-37- W N G	1800-4000K	55°	81%
	A507-11-38- W N G	2700-5000K	55°	81%

IP54 | CRI>90 | L80B10 > 55.000h
 MacAdam Step 3
 EXCL*
 EXCL**
 Ø79
 UGR <19


		CCT	Beam	LOR
BUDDY Trimless DIM to warm	A507-12-39- W N G	1800-3000K	54°	75%

IP54 | CRI>90 | L80B10 > 55.000h
 MacAdam Step 3
 EXCL*
 EXCL**
 Ø79
 UGR <19

○	BEAM	LOR
1	29°	82%
2	43°	83%
3	54°	80%

ACCESSORY
BUDDY Trimless Accessory**
A507-10-90
 MANDATORY FOR INSTALLATION

OPTIONAL ACCESSORIES
BUDDY Trimless
High Chromatic LED
 NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

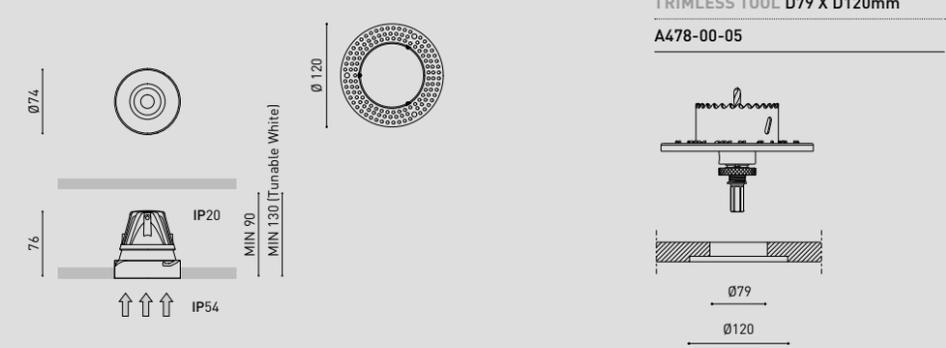

COLOUR | W □ | N ■ | G ■ | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
OTHER CCT OPTIONS PLEASE CONSULT



BUDDY Tilt

		CCT	Beam	LOR
BUDDY Tilt	A508-00-0-0-	2700K	29° / 43° / 54°	○
	A508-00-0-1-	3000K	29° / 43° / 54°	○
	A508-00-0-3-	3500K	29° / 43° / 54°	○
	A508-00-0-2-	4000K	29° / 43° / 54°	○

III IP54 | CRI>90 | L80B10 >66,000h
 MacAdam Step 2
EXCL*
355°
25°
Ø79
▲

		CCT	Beam	LOR
BUDDY Tilt Super Spot	A508-00-00-	2700K	12°	62%
	A508-00-01-	3000K	12°	62%
	A508-00-03-	3500K	12°	62%
	A508-00-02-	4000K	12°	62%

III IP54 | CRI>90 | L80B10 >55,000h
 MacAdam Step 2
EXCL*
355°
25°
Ø79
▲

		CCT	Beam	LOR
BUDDY Tilt Tunable White	A508-01-17-	1800-4000K	28°	85%
	A508-01-18-	2700-5000K	28°	85%
	A508-01-27-	1800-4000K	43°	86%
	A508-01-28-	2700-5000K	43°	86%
	A508-01-37-	1800-4000K	55°	81%
	A508-01-38-	2700-5000K	55°	81%

III IP54 | CRI>90 | L80B10 >55,000h
 MacAdam Step 3
EXCL*
355°
25°
Ø79
▲

		CCT	Beam	LOR
BUDDY Tilt DIM to warm	A508-02-39-	1800-3000K	54°	75%

III IP54 | CRI>90 | L80B10 >55,000h
 MacAdam Step 3
EXCL*
355°
25°
Ø79
▲


○	BEAM	LOR
1	29°	82%
2	43°	83%
3	54°	80%

OPTIONAL ACCESSORY

BUDDY Tilt

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS



COLOUR | W □ | N ■ | WG □ | NG ■ | WN □ | MATERIAL | AL | PC/PMMA

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
OTHER CCT OPTIONS PLEASE CONSULT



BUDDY Tilt Trimless

		CCT	Beam	LOR
BUDDY Tilt Trimless	A508-10-0-0- W N G	2700K	29° / 43° / 54°	○
	A508-10-0-1- W N G	3000K	29° / 43° / 54°	○
	A508-10-0-3- W N G	3500K	29° / 43° / 54°	○
	A508-10-0-2- W N G	4000K	29° / 43° / 54°	○

IP54 |
 CRI>90 |
 L80B10 >66.000h
 MacAdam Step 2
 EXCL*
 EXCL**
 25°
 Ø79

		CCT	Beam	LOR
BUDDY Tilt Trimless Super Spot	A508-10-00- W N G	2700K	12°	62%
	A508-10-01- W N G	3000K	12°	62%
	A508-10-03- W N G	3500K	12°	62%
	A508-10-02- W N G	4000K	12°	62%

IP54 |
 CRI>90 |
 L80B10 >55.000h
 MacAdam Step 2
 EXCL*
 EXCL**
 25°
 Ø79

		CCT	Beam	LOR
BUDDY Tilt Trimless Tunable White	A508-11-17- W N G	1800-4000K	28°	85%
	A508-11-18- W N G	2700-5000K	28°	85%
	A508-11-27- W N G	1800-4000K	43°	86%
	A508-11-28- W N G	2700-5000K	43°	86%
	A508-11-37- W N G	1800-4000K	55°	81%
	A508-11-38- W N G	2700-5000K	55°	81%

IP54 |
 CRI>90 |
 L80B10 >55.000h
 MacAdam Step 3
 EXCL*
 EXCL**
 25°
 Ø79


		CCT	Beam	LOR
BUDDY Tilt Trimless DIM to warm	A508-12-39- W N G	1800-3000K	54°	75%

IP54 |
 CRI>90 |
 L80B10 >55.000h
 MacAdam Step 3
 EXCL*
 EXCL**
 25°
 Ø79

○	BEAM	LOR
1	29°	82%
2	43°	83%
3	54°	80%

ACCESSORY
BUDDY Tilt Trimless Accessory**
A508-10-90
 MANDATORY FOR INSTALLATION

OPTIONAL ACCESSORIES
BUDDY Tilt Trimless
High Chromatic LED
 NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

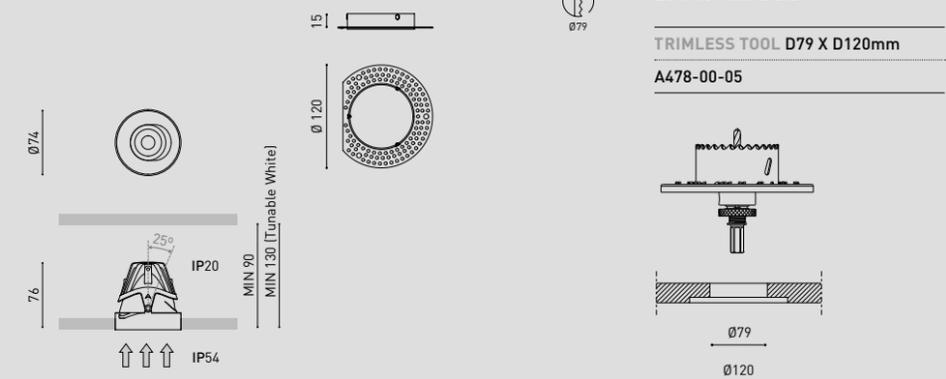

COLOUR | W □ | N ■ | G ■ | MATERIAL | AL | PC/PMMA

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
 OTHER CCT OPTIONS PLEASE CONSULT



BUDDY Wall Washer

					CCT	LOR
BUDDY Wall Washer	A509-00-10-	W	N	WN	2700K	48%
	A509-00-11-	W	N	WN	3000K	48%
	A509-00-13-	W	N	WN	3500K	48%
	A509-00-12-	W	N	WN	4000K	48%

III IP20 | CRI>90 | L80B10 >66,000h



					CCT	LOR
BUDDY Wall Washer Tunable White	A509-01-17-	W	N	WN	1800-4000K	49%
	A509-01-18-	W	N	WN	2700-5000K	49%

III IP20 | CRI>90 | L80B10 >55,000h




OPTIONAL ACCESSORY

BUDDY WALL WASHER

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS



COLOUR | W | N | WN | MATERIAL | AL | PMMA

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
OTHER CCT & DIM OPTIONS PLEASE CONSULT



BUDDY Wall Washer Trimless

			CCT	LOR
BUDDY Wall Washer Trimless	A509-10-10-	W N	2700K	48%
	A509-10-11-	W N	3000K	48%
	A509-10-13-	W N	3500K	48%
	A509-10-12-	W N	4000K	48%

III IP20 | CRI>90 | L80B10 >66,000h



			CCT	LOR
BUDDY Wall Washer Trimless Tunable White	A509-11-17-	W N	1800-4000K	49%
	A509-11-18-	W N	2700-5000K	49%

III IP20 | CRI>90 | L80B10 >55,000h




ACCESSORY

BUDDY WALL WASHER

Trimless Accessory**

A509-10-90

MANDATORY FOR INSTALLATION



OPTIONAL ACCESSORIES



BUDDY Tilt Trimless

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

TRIMLESS TOOL D79 X D120mm



A478-00-05



COLOUR | W □ | N ■ | MATERIAL | AL | PMMA

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
OTHER CCT & DIM OPTIONS PLEASE CONSULT

BUDDY DRIVERS

*DRIVER OPTIONS				P	I	CCT	Flux		
BUDDY 1 Buddy Buddy Trimless Buddy Tilt Buddy Tilt Trimless		 NO DIM	0434-01-85	4W	125mA	2700K	760 lm		
						3000K	790 lm		
						3500K	795 lm		
						4000K	800 lm		
BUDDY 2 Buddy Buddy Trimless Buddy Tilt Buddy Tilt Trimless Buddy Wall Washer Buddy Wall Washer Trimless		 NO DIM	0434-01-86	6,6W	200mA				
						 DALI	0434-01-89	2700K	1150 lm
								3000K	1200 lm
								3500K	1210 lm
								4000K	1220 lm
 PHASE CUT	0434-01-92								
BUDDY Super Spot		 NO DIM	0434-01-87	6W	500mA	2700K	750 lm		
						3000K	790 lm		
		 DALI	0434-01-88			3500K	825 lm		
						4000K	845 lm		
BUDDY Tunable White		 DALI	0434-01-90	6,7W	400mA	1800-4000K 2700-5000K	690 lm 815 lm		
BUDDY DIM to warm		 DALI	0434-01-94	6W	350mA	1800-3000K	650 lm		
								 PHASE CUT	0434-01-95
BUDDY Wall Washer Tunable White		 DALI	0434-01-96	8,4W	500mA	1800-4000K	830 lm		
						2700-5000K	1000 lm		

220
240 V~ | 48V PLEASE CONSULT



BUDDY L

		CCT	Beam	LOR
BUDDY L	A568-00-0-0-	2700K	32° / 44° / 51°	○
	A568-00-0-1-	3000K	32° / 44° / 51°	○
	A568-00-0-3-	3500K	32° / 44° / 51°	○
	A568-00-0-2-	4000K	32° / 44° / 51°	○
BUDDY L Super Spot	A568-00-00-	2700K	13°	67%
	A568-00-01-	3000K	13°	67%
	A568-00-03-	3500K	13°	67%
	A568-00-02-	4000K	13°	67%

III IP54 | CRI>90 | L80B10 >66,000h



		CCT	Beam	LOR
BUDDY L Tunable White	A568-01-17-	1800-4000K	29°	78%
	A568-01-18-	2700-5000K	29°	78%
	A568-01-27-	1800-4000K	41°	83%
	A568-01-28-	2700-5000K	41°	83%
	A568-01-37-	1800-4000K	51°	84%
	A568-01-38-	2700-5000K	51°	84%
BUDDY L DIM to warm	A568-02-39-	1800-3000K	56°	82%

III IP54 | CRI>90 | L80B10 >55,000h






○	BEAM	LOR
1	32°	76%
2	44°	82%
3	51°	85%

ACCESSORY

BUDDY L Trimless Accessory**

A568-10-90

MANDATORY FOR INSTALLATION



OPTIONAL ACCESSORIES

BUDDY L



BUDDY L Trimless

High Chromatic LED ⓘ » 361

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

TRIMLESS TOOL D105 X D145mm

A478-00-06



COLOUR | W □ | N ■ | WG □ | NG ■ | WN □ | G ■ | MATERIAL | AL | PC/PMMA

COLOURS MAY AFFECT THE LIGHTING PARAMETERS



BUDDY L Trimless

		CCT	Beam	LOR
BUDDY L Trimless	A568-10-0-0- W N G	2700K	32° / 44° / 51°	○
	A568-10-0-1- W N G	3000K	32° / 44° / 51°	○
	A568-10-0-3- W N G	3500K	32° / 44° / 51°	○
	A568-10-0-2- W N G	4000K	32° / 44° / 51°	○
BUDDY L Trimless Super Spot	A568-10-00- W N G	2700K	13°	67%
	A568-10-01- W N G	3000K	13°	67%
	A568-10-03- W N G	3500K	13°	67%
	A568-10-02- W N G	4000K	13°	67%

III IP54 | CRI>90 | L80B10 >66.000h



		CCT	Beam	LOR
BUDDY L Trimless Tunable White	A568-11-17- W N G	1800-4000K	29°	78%
	A568-11-18- W N G	2700-5000K	29°	78%
	A568-11-27- W N G	1800-4000K	41°	83%
	A568-11-28- W N G	2700-5000K	41°	83%
	A568-11-37- W N G	1800-4000K	51°	84%
	A568-11-38- W N G	2700-5000K	51°	84%
BUDDY L Trimless DIM to warm	A568-12-39- W N G	1800-3000K	56°	82%


III IP54 | CRI>90 | L80B10 >55.000h



○	BEAM	LOR
1	32°	76%
2	44°	82%
3	51°	85%

ACCESSORY
BUDDY L Trimless Accessory**
A568-10-90
MANDATORY FOR INSTALLATION

OPTIONAL ACCESSORIES
BUDDY L
BUDDY L Trimless
High Chromatic LED ⓘ » 361
NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

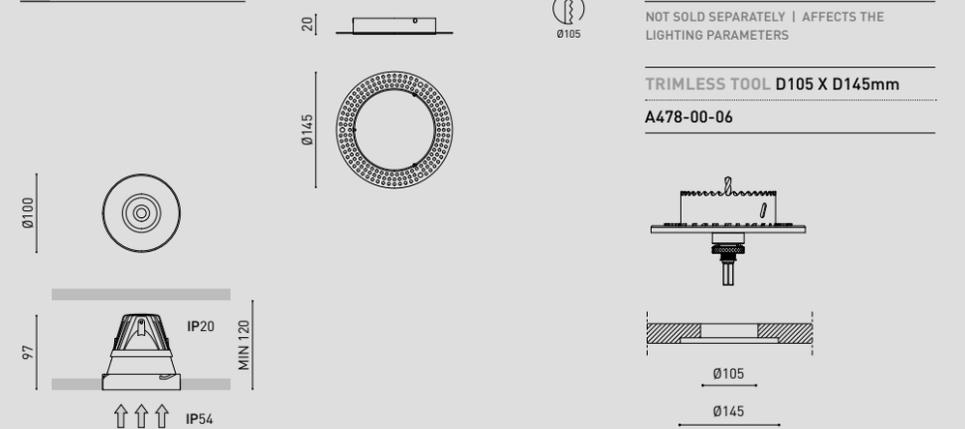

COLOUR | W □ | N ■ | WG □ | NG ■ | WN □ | G ■ | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS



BUDDY L Tilt

						CCT	Beam	LOR	
BUDDY L Tilt	A569-00-0-0-	W	N	WG	NG	WN	2700K	32°/44°/51°	○
	A569-00-0-1-	W	N	WG	NG	WN	3000K	32°/44°/51°	○
	A569-00-0-3-	W	N	WG	NG	WN	3500K	32°/44°/51°	○
	A569-00-0-2-	W	N	WG	NG	WN	4000K	32°/44°/51°	○
BUDDY L Tilt Super Spot	A569-00-00-	W	N	WG	NG	WN	2700K	13°	67%
	A569-00-01-	W	N	WG	NG	WN	3000K	13°	67%
	A569-00-03-	W	N	WG	NG	WN	3500K	13°	67%
	A569-00-02-	W	N	WG	NG	WN	4000K	13°	67%

III IP54 | CRI>90 | L80B10 >66,000h



						CCT	Beam	LOR	
BUDDY L Tilt Tunable White	A569-01-17-	W	N	WG	NG	WN	1800-4000K	29°	78%
	A569-01-18-	W	N	WG	NG	WN	2700-5000K	29°	78%
	A569-01-27-	W	N	WG	NG	WN	1800-4000K	41°	83%
	A569-01-28-	W	N	WG	NG	WN	2700-5000K	41°	83%
	A569-01-37-	W	N	WG	NG	WN	1800-4000K	51°	84%
	A569-01-38-	W	N	WG	NG	WN	2700-5000K	51°	84%
BUDDY L Tilt DIM to warm	A569-02-39-	W	N	WG	NG	WN	1800-3000K	56°	82%

III IP54 | CRI>90 | L80B10 >55,000h





○	BEAM	LOR
1	32°	76%
2	44°	82%
3	51°	85%

ACCESSORY

BUDDY L Trimless Accessory**

A569-10-90

MANDATORY FOR INSTALLATION



OPTIONAL ACCESSORIES

BUDDY L Tilt


BUDDY L Tilt Trimless

High Chromatic LED ⓘ » 361

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

TRIMLESS TOOL D105 X D145mm

A478-00-06



COLOUR | W □ | N ■ | WG □ | NG ■ | WN □ | G ■ | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS



BUDDY L Tilt Trimless

		CCT	Beam	LOR
BUDDY L Tilt Trimless	A569-10-0-0- W N G	2700K	32°/44°/51°	○
	A569-10-0-1- W N G	3000K	32°/44°/51°	○
	A569-10-0-3- W N G	3500K	32°/44°/51°	○
	A569-10-0-2- W N G	4000K	32°/44°/51°	○
BUDDY L Tilt Trimless Super Spot	A569-10-00- W N G	2700K	13°	67%
	A569-10-01- W N G	3000K	13°	67%
	A569-10-03- W N G	3500K	13°	67%
	A569-10-02- W N G	4000K	13°	67%

III IP54 | CRI>90 | L80B10 >66.000h



		CCT	Beam	LOR
BUDDY L Tilt Trimless Tunable White	A569-11-17- W N G	1800-4000K	29°	78%
	A569-11-18- W N G	2700-5000K	29°	78%
	A569-11-27- W N G	1800-4000K	41°	83%
	A569-11-28- W N G	2700-5000K	41°	83%
	A569-11-37- W N G	1800-4000K	51°	84%
	A569-11-38- W N G	2700-5000K	51°	84%
BUDDY L Tilt Trimless DIM to warm	A569-12-39- W N G	1800-3000K	56°	82%

III IP54 | CRI>90 | L80B10 >55.000h





○	BEAM	LOR
1	32°	76%
2	44°	82%
3	51°	85%

ACCESSORY

BUDDY L Trimless Accessory**

A569-10-90

MANDATORY FOR INSTALLATION



OPTIONAL ACCESSORIES

BUDDY L Tilt


BUDDY L Tilt Trimless

High Chromatic LED ⓘ » 361

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

TRIMLESS TOOL D105 X D145mm

A478-00-06



COLOUR | W □ | N ■ | WG □ | NG ■ | WN □ | G ■ | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS

BUDDY L DRIVERS

*DRIVER OPTIONS				P	I	CCT	Flux
BUDDY L 1 Buddy L Buddy L Trimless Buddy L Tilt Buddy L Tilt Trimless		 NO DIM	0433-01-37	8,1W	250mA	2700K	1500 lm
						3000K	1560 lm
						3500K	1600 lm
						4000K	1600 lm
		 NO DIM	0433-00-21				
BUDDY L 2 Buddy L Buddy L Trimless Buddy L Tilt Buddy L Tilt Trimless		 DALI	0433-01-40	11,5W	350mA	2700K	2010 lm
						3000K	2090 lm
		 CASAMBI	0433-01-43			3500K	2120 lm
						4000K	2120 lm
		 PHASE CUT	0433-01-39				
BUDDY L Super Spot		 NO DIM	0433-01-38	11,6W	650mA	2700K	1430 lm
						3000K	1510 lm
		 DALI	0433-01-41			3500K	1570 lm
						4000K	1610 lm
		 CASAMBI	0434-01-98				
BUDDY L Tunable White		 DALI	0433-01-42	11,6W	350mA	1800-4000K	1270 lm
						2700-5000K	1630 lm
BUDDY L DIM to warm		 DALI	0433-01-40	11,6W	350mA	1800-3000K	1280 lm
		 PHASE CUT	0433-01-39				

220
240 V~ | 48V PLEASE CONSULT

BUDDY
PURPOSEFUL
DESIGN

by **ARKOSLIGHT**