




DIMENSIONS



ACCESSORIES

CUSTOM & MOUNTING
ACCESSORIES

DRIVER OPTIONS

AWARDS

INTERIOR
DESIGN

Name	BLACK FOSTER 10 FLOOD 4000K N
Reference	A3175002N
Color	Matt black
RAL	9005
Category	CUSTOM SYSTEMS

PRODUCT

BLACK FOSTER 10 FLOOD 4000K N

A3175002N

Matt black

9005

CUSTOM SYSTEMS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2500 Lm
Power	21 W
Power values of the system	26,80 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	Please Consult
Control through bluetooth	Please Consult
Driver	Excluded: Must be placed on remote
Emergency power supply	Please Consult
Electrical insulation class	III
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Weight	705 g.
Packaged weight	1030 g.
Packaging dimensions	D105 x 580 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the lighting fixture that transfers the applauded "Invisible Black" effect to a linear system. Black Foster is composed of a series of combinable modules enabling the alternation of segments with light emission and without light emission. However, whether it is ON or OFF, this luminaire always keeps the aesthetics of a perfect dark line. To the observer, it is impossible to distinguish between Black Foster parts that emit light from those that don't. Black Foster's modularity provides a wide range of different combinations, allowing to set up the light emission location as many times as needed, and adapting itself to the requirements of each project in particular. *** NOTE: Recommended for installations where the profile can be installed before the false plasterboard ceiling (thickness 12,5 mm).

POLAR DIAGRAM

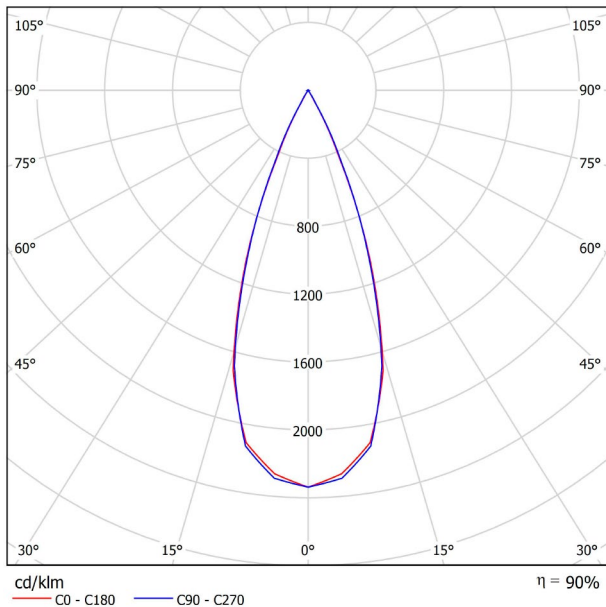

CONICAL DIAGRAM

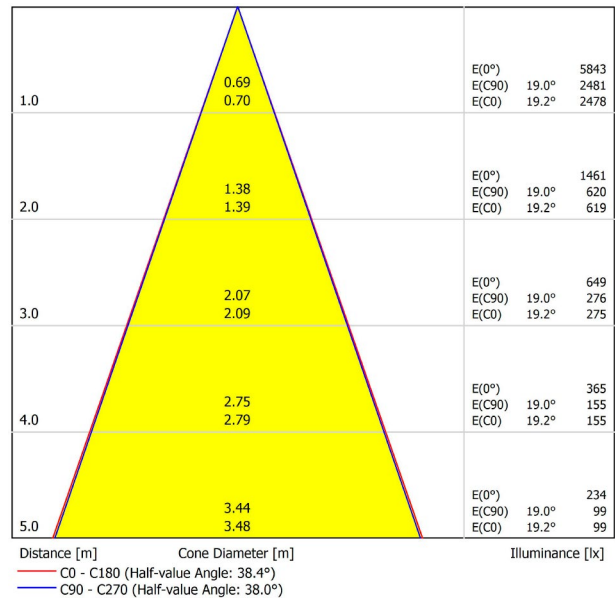


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-13.0	-12.3	-12.7	-12.1	-11.9	-13.8	-13.1	-13.5	-13.0	-12.8	
	3H	-6.7	-6.1	-6.4	-5.8	-5.6	-6.5	-5.9	-6.2	-5.7	-5.5	
	4H	-3.1	-2.6	-2.8	-2.3	-2.1	-2.6	-2.0	-2.3	-1.8	-1.5	
	6H	0.5	1.0	0.8	1.3	1.6	0.9	1.4	1.2	1.7	2.0	
	8H	2.4	2.8	2.7	3.1	3.4	2.7	3.2	3.0	3.5	3.8	
4H	12H	4.4	4.8	4.7	5.1	5.4	4.7	5.2	5.1	5.5	5.8	
	2H	-10.4	-9.8	-10.1	-9.6	-9.3	-10.7	-10.2	-10.4	-9.9	-9.7	
	3H	-4.4	-4.0	-4.1	-3.7	-3.3	-4.2	-3.8	-3.9	-3.5	-3.2	
	4H	-1.0	-0.6	-0.6	-0.3	0.1	-0.5	-0.1	-0.1	0.2	0.5	
	6H	2.6	2.9	3.0	3.3	3.6	2.9	3.2	3.3	3.6	4.0	
8H	8H	4.4	4.7	4.9	5.1	5.5	4.7	5.0	5.1	5.4	5.8	
	12H	6.5	6.7	6.9	7.1	7.5	6.8	7.1	7.2	7.5	7.9	
	4H	0.6	0.8	1.0	1.2	1.6	0.9	1.1	1.3	1.5	1.9	
	6H	4.2	4.4	4.6	4.8	5.3	4.4	4.6	4.9	5.0	5.5	
	8H	6.2	6.3	6.6	6.8	7.3	6.4	6.5	6.8	7.0	7.5	
12H	12H	8.3	8.5	8.8	8.9	9.4	8.6	8.7	9.1	9.2	9.7	
	4H	1.1	1.3	1.5	1.7	2.1	1.3	1.6	1.8	2.0	2.4	
	6H	4.8	5.0	5.3	5.4	5.9	5.0	5.1	5.4	5.6	6.0	
	8H	6.9	7.0	7.3	7.5	8.0	7.0	7.2	7.5	7.6	8.1	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.9 / -0.3					+1.3 / -0.4					
S = 1.5H		+1.9 / -0.6					+2.7 / -0.7					
S = 2.0H		+3.1 / -0.8					+4.2 / -1.0					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 2500lm Total Luminous Flux												

L


BLACK FOSTER Custom	Gap Corner 90°	A317-00-07- N 	200 x 200mm
	Gap 250	A317-00-01- N 	250mm
	Gap 500	A317-00-02- N 	500mm
	Gap 1000	A317-00-03- N 	1000mm
	Gap 2000	A317-00-04- N 	2000mm

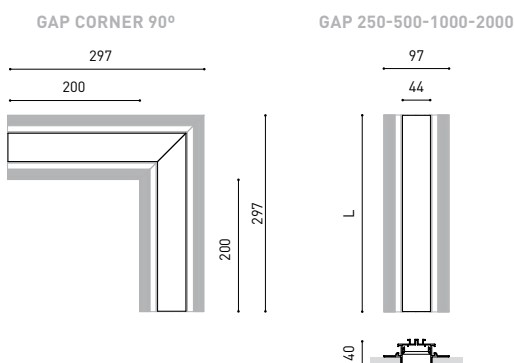

BLACK FOSTER End Caps Kit	A317-00-05- N 	Thickness of each cover 2mm.
----------------------------------	--------------------------	-------------------------------------



BLACK FOSTER Straight Joiner	A317-00-06
-------------------------------------	-------------------

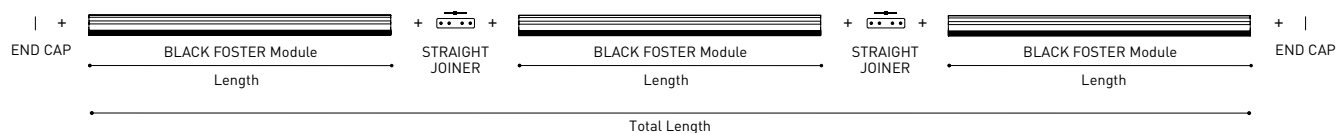

COLOUR | **N ■ RAL 9005** | MATERIAL | **AL** | **ABS+PC** |

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5Year
GUARANTEE*

BLACK FOSTER Track Clamp Kit

A219-21-20- | B |



BLACK FOSTER Flush Ceiling Kit

A219-22-06- | B |




BLACK FOSTER Track Clamp Kit for M6 ROD

A219-21-21- | B |



BLACK FOSTER Suspension Kit

A219-21-10- | B |

**SUGGESTED MOUNTING ACCESSORIES QUANTITIES**


Black Foster custom 2, 3, 5: 1Pcs.

Black Foster custom 10, 15: 2Pcs.

Gap 250, 500, 1000: 2Pcs.

Gap 2000: 4Pcs.

COLOUR | B □ |



DRIVER OPTIONS*

		P	I	D
 NO DIM	0434-01-18	50W	700mA	124 x 79 x 22mm
 DALI Push / 1-10V	0433-00-23	50W	700mA	124 x 79 x 22mm

Connect in series only in order to keep a constant current.