



CO
CO

ARKOSLIGHT



Compacte et puissante

Une nouvelle génération LED avec **154 lm/W**
d'efficacité lumineuse. Le coco est un cylindre compact
en aluminium avec un **flux de 1340 lm**.



Liberté de mouvement

Rotation à **360°** et inclinaison à **90°**.



COCO / COCO M



20° / 32°



34° / 43°



48° / 53°

COCO / COCO M TUNABLE WHITE



28° / 28°



42° / 41°



54° / 55°

Liberté d'éclairage

Avec trois angles d'ouverture, **spot** / **medium** / **flood** + version **Super spot 12° / 13°**.
Le coco couvre de nombreux besoins : éclairage d'accentuation, général...



Coco Super Spot

Hautement technique (**Faisceau 12° / 13°**). LED et lentilles de haute qualité soigneusement sélectionnées. Il maintient un flux lumineux uniforme et des niveaux de glare confortables.

Option DIM intégrée

Une intégration parfaite pour les systèmes 48V.
Cette option permet de réguler de **0** à **100** l'intensité
de chaque luminaire de manière indépendante.



Accessoires


A disposition différents accessoires :
anti-glare honeycomb et **anti-glare screen**,
qui réduisent l'éblouissement et
favorisent le confort visuel.



COCO ANTI-GLARE SCREEN



COCO ANTI-GLARE
HONEYCOMB LOUVER

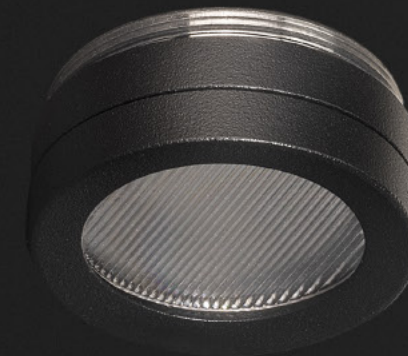





Linear Filter

Ce filtre transforme le faisceau lumineux circulaire en une **forme linéaire**. Idéal pour les applications nécessitant une distribution précise et linéaire de la lumière.



MAGNETIC 24V COCO

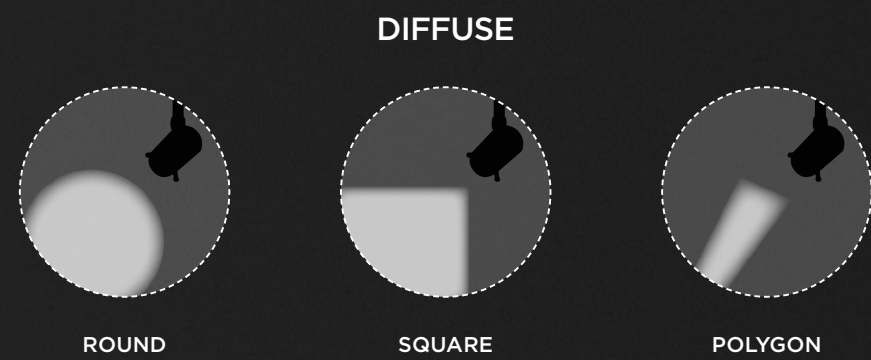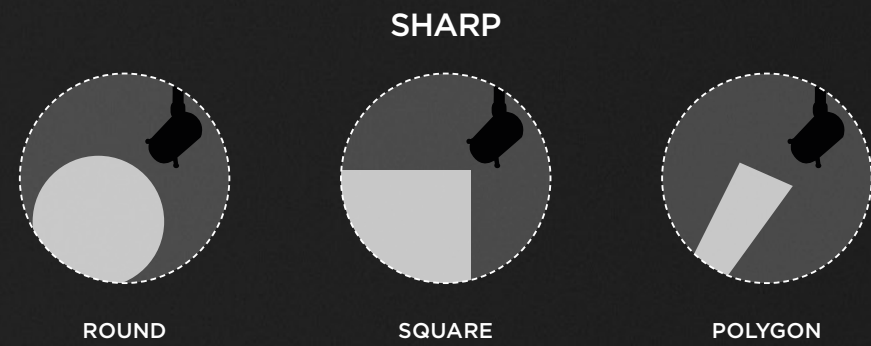

Coco Shaper

Crée des scénographies uniques en projetant le contour géométrique souhaité: des cercles, des polygones quadrilatères ou triangulaires.



8:20h · 3700K



12:00h · 5000K



17:00h · 2700K

Tunable white


Version disponible pour Coco 48V. Très apprécié dans les environnements domestiques, l'hôtellerie, les bureaux, etc.

COCO
SPÉCIFICATIONS
TECHNIQUES





MAGNETIC 24V COCO



OPTIONAL ACCESSORIES				
COCO Anti-glare Honeycomb Louver**				
A498-90-00-	WT	NT		
			NOT SOLD SEPARATELY	
				
COCO Anti-glare Screen**				
A498-90-01-	WT	NT		
			NOT SOLD SEPARATELY	
				
COCO Linear Filter**				
A498-90-02-	WT	NT		
			SUITABLE FOR BEAM $\leq 34^\circ$ NOT SOLD SEPARATELY	
COCO High Chromatic Led**				
NOT SOLD SEPARATELY				
TRIMLESS TOOL D16 X D34mm				
A478-00-00				

		P	CCT	Beam	Flux	LOR
MAGNETIC 24V COCO	A499-00-10- WT NT	8,7W	2700K	20°	1200 lm	87%
	A499-00-11- WT NT	8,7W	3000K	20°	1250 lm	87%
	A499-00-13- WT NT	8,7W	3500K	20°	1310 lm	87%
	A499-00-12- WT NT	8,7W	4000K	20°	1340 lm	87%
	A499-00-20- WT NT	8,7W	2700K	34°	1200 lm	89%
	A499-00-21- WT NT	8,7W	3000K	34°	1250 lm	89%
	A499-00-23- WT NT	8,7W	3500K	34°	1310 lm	89%
	A499-00-22- WT NT	8,7W	4000K	34°	1340 lm	89%
	A499-00-30- WT NT	8,7W	2700K	48°	1200 lm	86%
	A499-00-31- WT NT	8,7W	3000K	48°	1250 lm	86%
	A499-00-33- WT NT	8,7W	3500K	48°	1310 lm	86%
	A499-00-32- WT NT	8,7W	4000K	48°	1340 lm	86%

24 V | IP20 | CRI>90 | L80B10 > 66.000 h

MacAdam Step 2 EXCL* 360° 90° 20° / 34° / 48°



		P	CCT	Beam	Flux	LOR
MAGNETIC 24V COCO Super Spot	A499-00-00- WT NT	6 W	2700K	12°	750 lm	66 %
	A499-00-01- WT NT	6 W	3000K	12°	800 lm	66 %
	A499-00-03- WT NT	6 W	3500K	12°	830 lm	66 %
	A499-00-02- WT NT	6 W	4000K	12°	850 lm	66 %

24 V | IP20 | CRI>90 | L80B10 > 55.000 h

MacAdam Step 2 EXCL* 360° 90° 12°


MAGNETIC 24V CONNECTOR A435-01-00 | W | N |

* MANDATORY FOR INSTALLATION

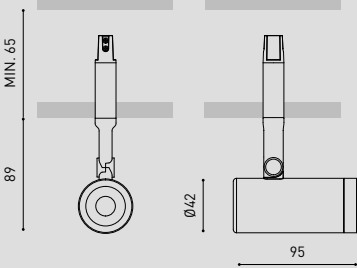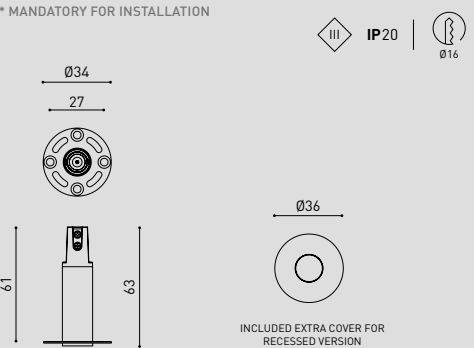


		P	V	D (A x B x C)
24V POWER SUPPLY	0434-01-37	60W	24V	180 x 52 x 30mm
	0433-10-22	100W	24V	295 x 43 x 30mm

220-240 V~ | MANDATORY FOR INSTALLATION | MUST BE PLACED ON REMOTE



24V DIMMER	0433-01-32	DALI / Push	24V	181 x 42 x 20mm
	0433-01-35	CASAMBI	24V	72,6 x 30 x 18mm

24 V | MUST BE PLACED ON REMOTE
OTHER DIM OPTIONS PLEASE CONSULT DROP VOLTAGE » 367



COLOUR | WT | NT | MATERIAL | AL | PC/PMMA | PLEASE CONSULT »

OTHER CCT OPTIONS PLEASE CONSULT
** AFFECTS THE LIGHTING PARAMETERS



OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COCO Anti-glare Honeycomb Louver

A498-90-00- | WT | NT |



COCO Anti-glare Screen

A498-90-01- | WT | NT |



COCO Linear Filter

A498-90-02- | WT | NT |



SUITABLE FOR BEAM ≤ 34°

COCO High Chromatic Led

COCO RECESSED

		P	CCT	Beam	I	Flux	LOR**
COCO Recessed	A530-0- ⌘ -10- WT NT	8,7W	2700K	20°	500mA	1200 lm	87%
	A530-0- ⌘ -11- WT NT	8,7W	3000K	20°	500mA	1250 lm	87%
	A530-0- ⌘ -13- WT NT	8,7W	3500K	20°	500mA	1310 lm	87%
	A530-0- ⌘ -12- WT NT	8,7W	4000K	20°	500mA	1340 lm	87%
	A530-0- ⌘ -20- WT NT	8,7W	2700K	34°	500mA	1200 lm	89%
	A530-0- ⌘ -21- WT NT	8,7W	3000K	34°	500mA	1250 lm	89%
	A530-0- ⌘ -23- WT NT	8,7W	3500K	34°	500mA	1310 lm	89%
	A530-0- ⌘ -22- WT NT	8,7W	4000K	34°	500mA	1340 lm	89%
	A530-0- ⌘ -30- WT NT	8,7W	2700K	48°	500mA	1200 lm	86%
	A530-0- ⌘ -31- WT NT	8,7W	3000K	48°	500mA	1250 lm	86%
	A530-0- ⌘ -33- WT NT	8,7W	3500K	48°	500mA	1310 lm	86%
	A530-0- ⌘ -32- WT NT	8,7W	4000K	48°	500mA	1340 lm	86%

220
240

V~



IP20

|

CRI>90

|

L80B10

> 66.000 h



MacAdam
Step 2



OPTIONS*



INCL



Ø50



350°

90°

20° / 34° / 48°

COCO Recessed Super Spot	A530-0- ⌘ -00- WT NT	6W	2700K	12°	500mA	750 lm	66%
	A530-0- ⌘ -01- WT NT	6W	3000K	12°	500mA	800 lm	66%
	A530-0- ⌘ -03- WT NT	6W	3500K	12°	500mA	830 lm	66%
	A530-0- ⌘ -02- WT NT	6W	4000K	12°	500mA	850 lm	66%

220
240

V~



IP20

|

CRI>90

|

L80B10

> 55.000 h



MacAdam
Step 2



OPTIONS*



INCL



Ø50



350°

90°

12°

COCO Recessed Tunable White	A530-12-17- WT NT	8,5W	1800-4000K	28°	500mA	850 lm	85%
	A530-12-18- WT NT	8,5W	2700-5000K	28°	500mA	1010 lm	85%
	A530-12-27- WT NT	8,5W	1800-4000K	42°	500mA	850 lm	87%
	A530-12-28- WT NT	8,5W	2700-5000K	42°	500mA	1010 lm	87%
	A530-12-37- WT NT	8,5W	1800-4000K	54°	500mA	850 lm	84%
	A530-12-38- WT NT	8,5W	2700-5000K	54°	500mA	1010 lm	84%

220
240

V~



IP20

|

CRI>90

|

L80B10

> 55.000 h



MacAdam
Step 3



DALI*



INCL



Ø50



350°

90°

28° / 42° / 54°



⌘ *OPTIONS

2	DIM DALI
5	DIM Phase Cut
7	DIM On Board

MIN. 70 (DIM PHASE CUT)

MIN. 85 (DIM ON BOARD)

MIN. 110 (DIM DALI)



COLOUR | WT □ | NT ■ |

MATERIAL | AL | PC/PMMA |

PLEASE CONSULT »

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
OTHER CCT & DIM OPTIONS PLEASE CONSULT



OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COCO M Anti-glare Honeycomb Louver

A553-90-00- | WT | NT |



COCO M Anti-glare Screen

A553-90-01- | WT | NT |



COCO M Linear Filter

A553-90-02- | WT | NT |



COCO M High Chromatic Led

COCO M RECESSED

		P	CCT	Beam	I	Flux	LOR
COCO M Recessed	A555-0- Ⓢ -10- WT NT	11,6W	2700K	32°	350mA	2080 lm	81%
	A555-0- Ⓢ -11- WT NT	11,6W	3000K	32°	350mA	2160 lm	81%
	A555-0- Ⓢ -13- WT NT	11,6W	3500K	32°	350mA	2190 lm	81%
	A555-0- Ⓢ -12- WT NT	11,6W	4000K	32°	350mA	2200 lm	81%
	A555-0- Ⓢ -20- WT NT	11,6W	2700K	43°	350mA	2080 lm	86%
	A555-0- Ⓢ -21- WT NT	11,6W	3000K	43°	350mA	2160 lm	86%
	A555-0- Ⓢ -23- WT NT	11,6W	3500K	43°	350mA	2190 lm	86%
	A555-0- Ⓢ -22- WT NT	11,6W	4000K	43°	350mA	2200 lm	86%
	A555-0- Ⓢ -30- WT NT	11,6W	2700K	53°	350mA	2080 lm	86%
	A555-0- Ⓢ -31- WT NT	11,6W	3000K	53°	350mA	2160 lm	86%
	A555-0- Ⓢ -33- WT NT	11,6W	3500K	53°	350mA	2190 lm	86%
	A555-0- Ⓢ -32- WT NT	11,6W	4000K	53°	350mA	2200 lm	86%

220
240 V~ |  IP20 | CRI>90 | L80B10
>66.000 h

 MacAdam
Step 2

 OPTIONS*

 INCL

 Ø62

 350°

 90°

 32° / 43° / 53°

		P	CCT	Beam	I	Flux	LOR
COCO M Recessed Super Spot	A555-0- Ⓢ -00- WT NT	8,7W	2700K	13°	500mA	1230 lm	67%
	A555-0- Ⓢ -01- WT NT	8,7W	3000K	13°	500mA	1300 lm	67%
	A555-0- Ⓢ -03- WT NT	8,7W	3500K	13°	500mA	1360 lm	67%
	A555-0- Ⓢ -02- WT NT	8,7W	4000K	13°	500mA	1400 lm	67%

220
240 V~ |  IP20 | CRI>90 | L80B10
>66.000 h

 MacAdam
Step 2

 OPTIONS*

 INCL

 Ø62

 350°

 90°

 13°

		P	CCT	Beam	I	Flux	LOR
COCO M Recessed Tunable White	A555-12-17- WT NT	11,3W	1800-4000K	28°	350mA	1250 lm	84%
	A555-12-18- WT NT	11,3W	2700-5000K	28°	350mA	1510 lm	84%
	A555-12-27- WT NT	11,3W	1800-4000K	41°	350mA	1250 lm	90%
	A555-12-28- WT NT	11,3W	2700-5000K	41°	350mA	1510 lm	90%
	A555-12-37- WT NT	11,3W	1800-4000K	55°	350mA	1250 lm	89%
	A555-12-38- WT NT	11,3W	2700-5000K	55°	350mA	1510 lm	89%

220
240 V~ |  IP20 | CRI>90 | L80B10
>95.000 h

 MacAdam
Step 3

 DALI+

 INCL

 Ø62


 350°

 90°

 28° / 41° / 55°

Ⓢ	*OPTIONS
2	DIM DALI
5	DIM Phase Cut

OTHER DIM OPTIONS PLEASE CONSULT

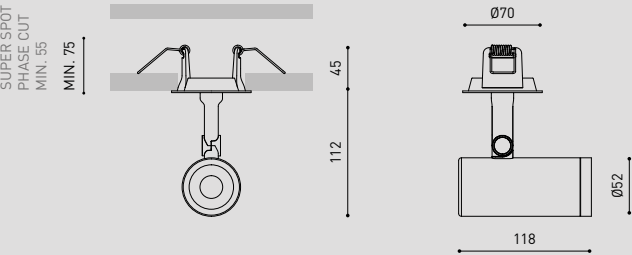

COLOUR | WT  | NT  | MATERIAL |  AL |  PC/PMMA | PLEASE CONSULT » 

OTHER CCT PLEASE CONSULT



COCO SURFACE

OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COCO Anti-glare Honeycomb Louver

A498-90-00- | WT | NT |




COCO Anti-glare Screen

A498-90-01- | WT | NT |



COCO Linear Filter

A498-90-02- | WT | NT |



SUITABLE FOR BEAM ≤ 34°

COCO High Chromatic Led

		P	CCT	Beam	I	Flux	LOR
COCO Surface	A536-0- Ⓞ -10- WT NT	8,7W	2700K	20°	500mA	1200 lm	87%
	A536-0- Ⓞ -11- WT NT	8,7W	3000K	20°	500mA	1250 lm	87%
	A536-0- Ⓞ -13- WT NT	8,7W	3500K	20°	500mA	1310 lm	87%
	A536-0- Ⓞ -12- WT NT	8,7W	4000K	20°	500mA	1340 lm	87%
	A536-0- Ⓞ -20- WT NT	8,7W	2700K	34°	500mA	1200 lm	89%
	A536-0- Ⓞ -21- WT NT	8,7W	3000K	34°	500mA	1250 lm	89%
	A536-0- Ⓞ -23- WT NT	8,7W	3500K	34°	500mA	1310 lm	89%
	A536-0- Ⓞ -22- WT NT	8,7W	4000K	34°	500mA	1340 lm	89%
	A536-0- Ⓞ -30- WT NT	8,7W	2700K	48°	500mA	1200 lm	86%
	A536-0- Ⓞ -31- WT NT	8,7W	3000K	48°	500mA	1250 lm	86%
	A536-0- Ⓞ -33- WT NT	8,7W	3500K	48°	500mA	1310 lm	86%
	A536-0- Ⓞ -32- WT NT	8,7W	4000K	48°	500mA	1340 lm	86%

220
240

V~

IP20

|

CRI>90

|

L80B10
>66.000h

MacAdam
Step 2

OPTIONS*

REMOTE

350°

90°

20° / 34° / 48°

		P	CCT	Beam	I	Flux	LOR
COCO Surface Super Spot	A536-0- Ⓞ -00- WT NT	6W	2700K	12°	500mA	750 lm	66%
	A536-0- Ⓞ -01- WT NT	6W	3000K	12°	500mA	800 lm	66%
	A536-0- Ⓞ -03- WT NT	6W	3500K	12°	500mA	830 lm	66%
	A536-0- Ⓞ -02- WT NT	6W	4000K	12°	500mA	850 lm	66%

220
240

V~

IP20

|

CRI>90

|

L80B10
>55.000h

MacAdam
Step 2

OPTIONS*


REMOTE

350°

90°

12°

Ⓞ	*OPTIONS
2	DIM DALI
5	DIM Phase Cut
7	DIM On Board

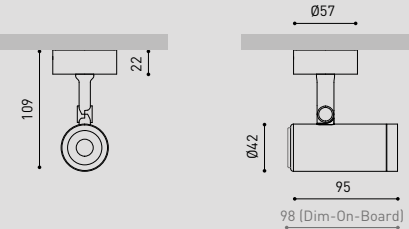



COCO M SURFACE

OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COCO M Anti-glare Honeycomb Louver

A553-90-00- | WT | NT |



COCO M Anti-glare Screen

A553-90-01- | WT | NT |



COCO M Linear Filter

A553-90-02- | WT | NT |



SIUTABLE FOR BEAM ≤ 32°

COCO M High Chromatic Led

		P	CCT	Beam	I	Flux	LOR
COCO M Surface	A556-0- Ⓢ -10- WT NT	11,6W	2700K	32°	350mA	2080 lm	81%
	A556-0- Ⓢ -11- WT NT	11,6W	3000K	32°	350mA	2160 lm	81%
	A556-0- Ⓢ -13- WT NT	11,6W	3500K	32°	350mA	2190 lm	81%
	A556-0- Ⓢ -12- WT NT	11,6W	4000K	32°	350mA	2200 lm	81%
	A556-0- Ⓢ -20- WT NT	11,6W	2700K	43°	350mA	2080 lm	86%
	A556-0- Ⓢ -21- WT NT	11,6W	3000K	43°	350mA	2160 lm	86%
	A556-0- Ⓢ -23- WT NT	11,6W	3500K	43°	350mA	2190 lm	86%
	A556-0- Ⓢ -22- WT NT	11,6W	4000K	43°	350mA	2200 lm	86%
	A556-0- Ⓢ -30- WT NT	11,6W	2700K	53°	350mA	2080 lm	86%
	A556-0- Ⓢ -31- WT NT	11,6W	3000K	53°	350mA	2160 lm	86%
	A556-0- Ⓢ -33- WT NT	11,6W	3500K	53°	350mA	2190 lm	86%
	A556-0- Ⓢ -32- WT NT	11,6W	4000K	53°	350mA	2200 lm	86%

220
240

V~



IP20

CRI>90

L80B10
>66.000 h



MacAdam
Step 2



OPTIONS*



REMOTE



350°



90°



32° / 43° / 53°

		P	CCT	Beam	I	Flux	LOR
COCO M Surface Super Spot	A556-0- Ⓢ -00- WT NT	8,7W	2700K	13°	500mA	1230 lm	67%
	A556-0- Ⓢ -01- WT NT	8,7W	3000K	13°	500mA	1300 lm	67%
	A556-0- Ⓢ -03- WT NT	8,7W	3500K	13°	500mA	1360 lm	67%
	A556-0- Ⓢ -02- WT NT	8,7W	4000K	13°	500mA	1400 lm	67%

220
240

V~



IP20

CRI>90

L80B10
>66.000 h



MacAdam
Step 2



OPTIONS*



REMOTE



350°



90°




13°

Ⓢ *OPTIONS

2 DIM DALI

5 DIM Phase Cut

OTHER DIM OPTIONS PLEASE CONSULT

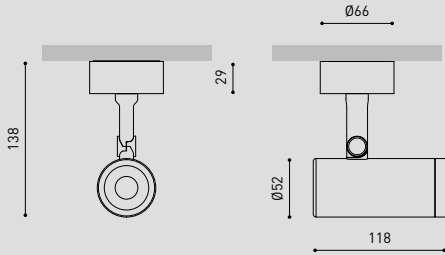

COLOUR | WT □ | NT ■ |

MATERIAL | AL | PC/PMMA |

PLEASE CONSULT »

OTHER CCT OPTIONS PLEASE CONSULT



OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COCO Anti-glare Honeycomb Louver

A498-90-00- | WT | NT |



COCO Anti-glare Screen

A498-90-01- | WT | NT |



COCO Linear Filter

A498-90-02- | WT | NT |



SIUTABLE FOR BEAM ≤ 34°

COCO High Chromatic Led

FINISHING	Lamp	Adaptor
WT	WT □ N ■	
NT	NT ■ N ■	
WTW	WT □ W □	
NTW	NT ■ W □	

COCO 48V

COCO 48V	+RE	P	CCT	Beam	Flux	LOR
A498-0- ② -10- WT NT WTW NTW -S		8,7W	2700K	20°	1200 lm	87%
A498-0- ② -11- WT NT WTW NTW -S		8,7W	3000K	20°	1250 lm	87%
A498-0- ② -13- WT NT WTW NTW -S		8,7W	3500K	20°	1310 lm	87%
A498-0- ② -12- WT NT WTW NTW -S		8,7W	4000K	20°	1340 lm	87%
A498-0- ② -20- WT NT WTW NTW -S		8,7W	2700K	34°	1200 lm	89%
A498-0- ② -21- WT NT WTW NTW -S		8,7W	3000K	34°	1250 lm	89%
A498-0- ② -23- WT NT WTW NTW -S		8,7W	3500K	34°	1310 lm	89%
A498-0- ② -22- WT NT WTW NTW -S		8,7W	4000K	34°	1340 lm	89%
A498-0- ② -30- WT NT WTW NTW -S		8,7W	2700K	48°	1200 lm	86%
A498-0- ② -31- WT NT WTW NTW -S		8,7W	3000K	48°	1250 lm	86%
A498-0- ② -33- WT NT WTW NTW -S		8,7W	3500K	48°	1310 lm	86%
A498-0- ② -32- WT NT WTW NTW -S		8,7W	4000K	48°	1340 lm	86%

48 V | ③ IP20 | CRI>90 | L80B10 > 66.000 h



COCO 48V Super Spot

A498-0- ② -00- WT NT WTW NTW -S	6W	2700K	12°	750 lm	66%
A498-0- ② -01- WT NT WTW NTW -S	6W	3000K	12°	800 lm	66%
A498-0- ② -03- WT NT WTW NTW -S	6W	3500K	12°	830 lm	66%
A498-0- ② -02- WT NT WTW NTW -S	6W	4000K	12°	850 lm	66%

48 V | ③ IP20 | CRI>90 | L80B10 > 55.000 h



COCO 48V Tunable White

A498-12-17- WT NT WTW NTW -S	8,5W	1800-4000K	28°	850 lm	85%
A498-12-18- WT NT WTW NTW -S	8,5W	2700-5000K	28°	1010 lm	85%
A498-12-27- WT NT WTW NTW -S	8,5W	1800-4000K	42°	850 lm	87%
A498-12-28- WT NT WTW NTW -S	8,5W	2700-5000K	42°	1010 lm	87%
A498-12-37- WT NT WTW NTW -S	8,5W	1800-4000K	54°	850 lm	84%
A498-12-38- WT NT WTW NTW -S	8,5W	2700-5000K	54°	1010 lm	84%


48 V | ③ IP20 | CRI>90 | L80B10 > 55.000 h



②	*OPTIONS
1	No DIM
2	DIM DALI
7	DIM ON BOARD

OTHER DIM OPTIONS PLEASE CONSULT

+RE	REF. ENDING	EXAMPLE
Ø	Track 48V	A4980110WT
-S	Track 48V Short	A4980110WT-S

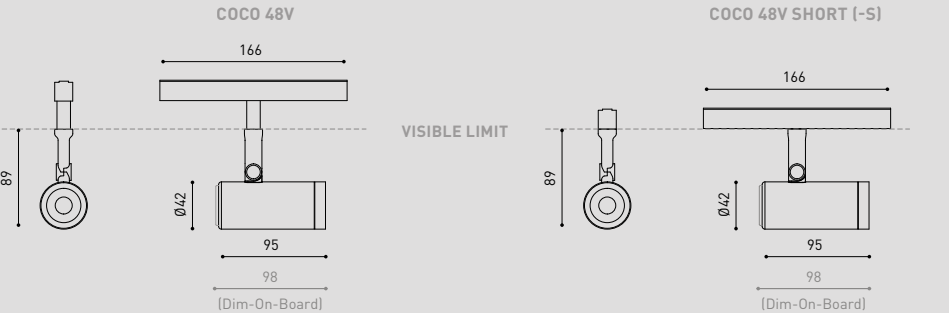

MATERIAL | ④ AL | ⑤ PC/PMMA |

PLEASE CONSULT » ⑥

OTHER CCT PLEASE CONSULT
*RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE
(AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).



COCO M 48V

OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COCO M Anti-glare Honeycomb Louver

A553-90-00- | WT | NT |



COCO M Anti-glare Screen

A553-90-01- | WT | NT |



COCO M Linear Filter

A553-90-02- | WT | NT |



SIUTABLE FOR BEAM ≤ 32°

COCO M High Chromatic Led

FINISHING Lamp Adaptor

WT	WT □ N ■
NT	NT ■ N ■
WTW	WT □ W □
NTW	NT ■ W □

COCO M 48V	+RE	P	CCT	Beam	Flux	LOR
A553-0- ② -10- WT NT WTW NTW -S		11,6W	2700K	32°	2080 lm	81%
A553-0- ② -11- WT NT WTW NTW -S		11,6W	3000K	32°	2160 lm	81%
A553-0- ② -13- WT NT WTW NTW -S		11,6W	3500K	32°	2190 lm	81%
A553-0- ② -12- WT NT WTW NTW -S		11,6W	4000K	32°	2200 lm	81%
A553-0- ② -20- WT NT WTW NTW -S		11,6W	2700K	43°	2080 lm	86%
A553-0- ② -21- WT NT WTW NTW -S		11,6W	3000K	43°	2160 lm	86%
A553-0- ② -23- WT NT WTW NTW -S		11,6W	3500K	43°	2190 lm	86%
A553-0- ② -22- WT NT WTW NTW -S		11,6W	4000K	43°	2200 lm	86%
A553-0- ② -30- WT NT WTW NTW -S		11,6W	2700K	53°	2080 lm	86%
A553-0- ② -31- WT NT WTW NTW -S		11,6W	3000K	53°	2160 lm	86%
A553-0- ② -33- WT NT WTW NTW -S		11,6W	3500K	53°	2190 lm	86%
A553-0- ② -32- WT NT WTW NTW -S		11,6W	4000K	53°	2200 lm	86%

48 V | IP20 | CRI>90 | L80B10 > 66.000 h



COCO M 48V Super Spot

A553-0- ② -00- WT NT WTW NTW -S	8,7W	2700K	13°	1230 lm	67%
A553-0- ② -01- WT NT WTW NTW -S	8,7W	3000K	13°	1300 lm	67%
A553-0- ② -03- WT NT WTW NTW -S	8,7W	3500K	13°	1360 lm	67%
A553-0- ② -02- WT NT WTW NTW -S	8,7W	4000K	13°	1400 lm	67%

48 V | IP20 | CRI>90 | L80B10 > 66.000 h



COCO M 48V Tunable White

A553-12-17- WT NT WTW NTW -S	11,3W	1800-4000K	28°	1250 lm	84%
A553-12-18- WT NT WTW NTW -S	11,3W	2700-5000K	28°	1510 lm	84%
A553-12-27- WT NT WTW NTW -S	11,3W	1800-4000K	41°	1250 lm	90%
A553-12-28- WT NT WTW NTW -S	11,3W	2700-5000K	41°	1510 lm	90%
A553-12-37- WT NT WTW NTW -S	11,3W	1800-4000K	55°	1250 lm	89%
A553-12-38- WT NT WTW NTW -S	11,3W	2700-5000K	55°	1510 lm	89%

48 V | IP20 | CRI>90 | L80B10 > 55.000 h




*OPTIONS

1	No DIM
2	DIM DALI

OTHER DIM OPTIONS PLEASE CONSULT

+RE REF. ENDING EXAMPLE

Ø	Track 48V	A5530110WT
-S	Track 48V Short	A5530110WT-S

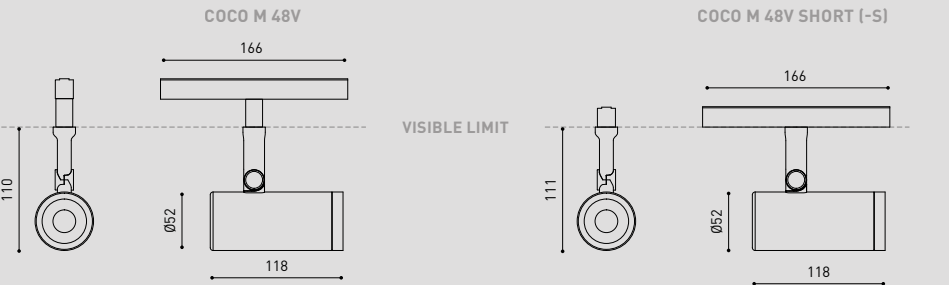

MATERIAL | AL | PC/PMMA |

PLEASE CONSULT »

OTHER CCT PLEASE CONSULT
*RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE
(AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).



COCO M 3L

OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COCO M Anti-glare Honeycomb Louver

A553-90-00- | WT | NT |



COCO M Anti-glare Screen

A553-90-01- | WT | NT |



COCO M Linear Filter

A553-90-02- | WT | NT |



SIUTABLE FOR BEAM ≤ 32°

COCO M High Chromatic Led

		P	CCT	Beam	I	Flux	LOR
COCO M 3L	A554-0- ☯ -10- WT NT	11,6W	2700K	32°	350mA	2080 lm	81%
	A554-0- ☯ -11- WT NT	11,6W	3000K	32°	350mA	2160 lm	81%
	A554-0- ☯ -13- WT NT	11,6W	3500K	32°	350mA	2190 lm	81%
	A554-0- ☯ -12- WT NT	11,6W	4000K	32°	350mA	2200 lm	81%
	A554-0- ☯ -20- WT NT	11,6W	2700K	43°	350mA	2080 lm	86%
	A554-0- ☯ -21- WT NT	11,6W	3000K	43°	350mA	2160 lm	86%
	A554-0- ☯ -23- WT NT	11,6W	3500K	43°	350mA	2190 lm	86%
	A554-0- ☯ -22- WT NT	11,6W	4000K	43°	350mA	2200 lm	86%
	A554-0- ☯ -30- WT NT	11,6W	2700K	53°	350mA	2080 lm	86%
	A554-0- ☯ -31- WT NT	11,6W	3000K	53°	350mA	2160 lm	86%
	A554-0- ☯ -33- WT NT	11,6W	3500K	53°	350mA	2190 lm	86%
	A554-0- ☯ -32- WT NT	11,6W	4000K	53°	350mA	2200 lm	86%

220
240 V~ | ☐ IP20 | CRI>90 | L80B10
> 66.000 h



		P	CCT	Beam	I	Flux	LOR
COCO M 3L Super Spot	A554-0- ☯ -00- WT NT	8,7W	2700K	13°	500mA	1230 lm	67%
	A554-0- ☯ -01- WT NT	8,7W	3000K	13°	500mA	1300 lm	67%
	A554-0- ☯ -03- WT NT	8,7W	3500K	13°	500mA	1360 lm	67%
	A554-0- ☯ -02- WT NT	8,7W	4000K	13°	500mA	1400 lm	67%


220
240 V~ | ☐ IP20 | CRI>90 | L80B10
> 66.000 h



☯ *OPTIONS

1	No DIM
2	DIM DALI

OTHER DIM OPTIONS PLEASE CONSULT

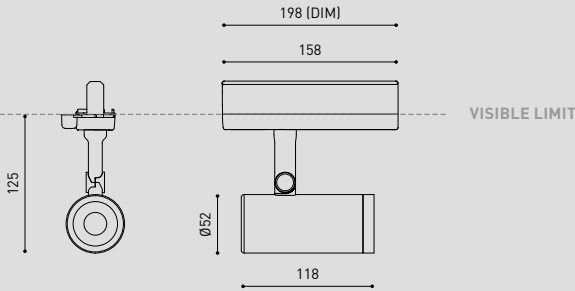

COLOUR | WT ☐ | NT ■ |

MATERIAL | ☐ AL | ☐ PC/PMMA |

PLEASE CONSULT » ☎

OTHER CCT OPTIONS PLEASE CONSULT

OPTIONAL ACCESSORIES



COCO



COCO SUPER SPOT



COCO ANTI-GLARE HONEYCOMB LOUVER



COCO LINEAR FILTER



COCO ANTI-GLARE SCREEN

FINISHINGS




NT



WT



NTW



WTW



NT



WT



NT SUPER SPOT



WT SUPER SPOT



NT



WT



NT SUPER SPOT



WT SUPER SPOT



COCO SHAPER RECESSED

		P	CCT	Beam	I	Flux	LOR
COCO SHAPER Recessed	A519-1- ☯ -00- NT	6W	2700K	20°-33°	500mA	650 lm	40-38%
	A519-1- ☯ -01- NT	6W	3000K	20°-33°	500mA	680 lm	40-38%
	A519-1- ☯ -02- NT	6W	4000K	20°-33°	500mA	730 lm	40-38%
	A519-1- ☯ -10- NT	6W	2700K	53°	500mA	650 lm	37%
	A519-1- ☯ -11- NT	6W	3000K	53°	500mA	680 lm	37%
	A519-1- ☯ -12- NT	6W	4000K	53°	500mA	730 lm	37%


220
240 V~ |  IP20 | CRI>90 | L80B10
>60.000 h



☯ *OPTIONS

1	No DIM
2	DIM DALI

OTHER DIM OPTIONS
PLEASE CONSULT

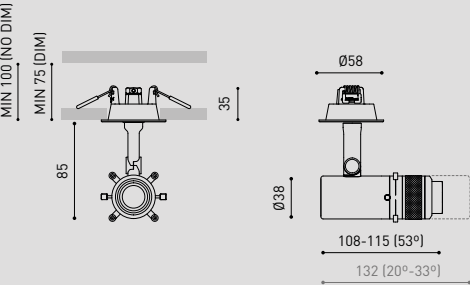

COLOUR | NT ■ | MATERIAL |  AL |  OPTICAL GLASS |

PLEASE CONSULT » 

OTHER CCT PLEASE CONSULT
CUSTOM GOBO PLEASE CONSULT



COCO SHAPER SURFACE

		P	CCT	Beam	I	Flux	LOR
COCO SHAPER Surface	A537-0- Ⓞ -00- NT	6W	2700K	20°-33°	500mA	650 lm	40-38%
	A537-0- Ⓞ -01- NT	6W	3000K	20°-33°	500mA	680 lm	40-38%
	A537-0- Ⓞ -02- NT	6W	4000K	20°-33°	500mA	730 lm	40-38%
	A537-0- Ⓞ -10- NT	6W	2700K	53°	500mA	650 lm	37%
	A537-0- Ⓞ -11- NT	6W	3000K	53°	500mA	680 lm	37%
	A537-0- Ⓞ -12- NT	6W	4000K	53°	500mA	730 lm	37%

220
240 V~ |  IP20 | CRI>90 | L80B10
>60.000 h



OPTIONS*



350°


90°

20° - 33° / 53°

Ⓞ *OPTIONS

1	No DIM
2	DIM DALI

OTHER DIM OPTIONS
PLEASE CONSULT

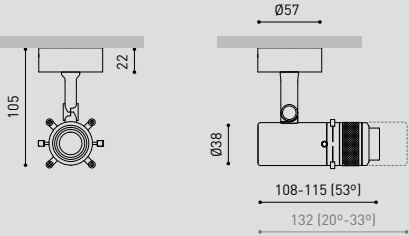

COLOUR | NT ■ | MATERIAL |  AL |  OPTICAL GLASS |

OTHER CCT PLEASE CONSULT
CUSTOM GOBO PLEASE CONSULT

PLEASE CONSULT » 

COCO SHAPER 48V




COCO SHAPER 48V							+RE	P	CCT	Beam	I	Flux	LOR	
A519-0-	⊙	-00-		NT		NTW		-S	6W	2700K	20°-33°	500mA	650 lm	40-38%
A519-0-	⊙	-01-		NT		NTW		-S	6W	3000K	20°-33°	500mA	680 lm	40-38%
A519-0-	⊙	-02-		NT		NTW		-S	6W	4000K	20°-33°	500mA	730 lm	40-38%
A519-0-	⊙	-10-		NT		NTW		-S	6W	2700K	53°	500mA	650 lm	37%
A519-0-	⊙	-11-		NT		NTW		-S	6W	3000K	53°	500mA	680 lm	37%
A519-0-	⊙	-12-		NT		NTW		-S	6W	4000K	53°	500mA	730 lm	37%

48 V |  IP20 | CRI>90 | L80B10 >60.000 h



⊙	*OPTIONS	+RE	REF. ENDING	EXAMPLE	FINISHING	Lamp	Adaptor
1	No DIM	Ø	Track 48V	A5190110NT	NT	NT 	N 
2	DIM DALI	-S	Track 48V Short	A5190110NT-S	NTW	NT 	W 

OTHER DIM OPTIONS
PLEASE CONSULT

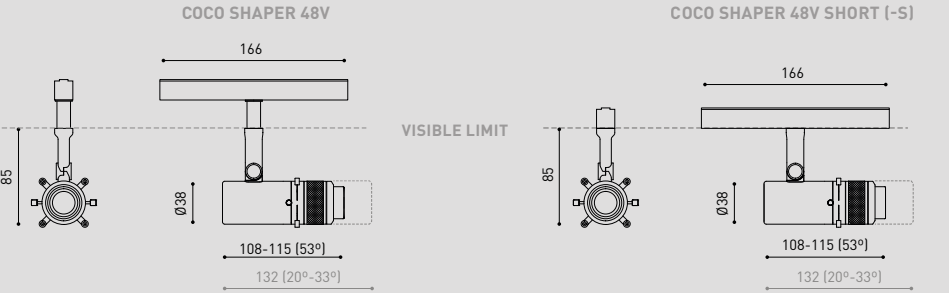

COLOUR | NT  | MATERIAL |  AL |  OPTICAL GLASS | PLEASE CONSULT » 

OTHER CCT PLEASE CONSULT
*RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE
(AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).
CUSTOM GOBO PLEASE CONSULT

BEAM & FINISHINGS



53° | NT



20°- 33° | NT



53° | NT



20°- 33° | NT



53° | NTW



20°- 33° | NTW

CO
CO

by ARKOSLIGHT