



CO
CO

ARKOSLIGHT



Compatto e performante

Nuova generazione LED. Fino **154 lm/W**
di efficacia luminosa. Un cilindro compatto in alluminio
con un **flusso lordo che arriva fino i 1340 lm.**



Libertà di movimento

Rotazione a **360°** e inclinazione a **90°**.



COCO / COCO M



20° / 32°



34° / 43°



48° / 53°

COCO / COCO M TUNABLE WHITE



28° / 28°



42° / 41°



54° / 55°

Libertà di applicazioni

Tre fasci di luce **Spot** / **Medium** / **Flood** + versione **Super Spot 12° / 13°**.
Copre molteplici esigenze: illuminazione d'accento, generale...



Coco Super Spot

Altamente scenografico (**Beam 12° / 13°**). LED e lenti di alta qualità accuratamente selezionate. Mantiene un flusso uniforme e livelli confortevoli di luminanza.

Opzione DIM on board

Integrazione perfetta per sistemi 48V.
Consente di regolare da **0** a **100** l'intensità
di ogni singolo apparecchio.



Accessori

Dispone de diversi accessori:
anti-glare honeycomb e **anti-glare screen**,
che riducono l'abbagliamento e
favoriscono il comfort visivo.



COCO ANTI-GLARE SCREEN



COCO ANTI-GLARE
HONEYCOMB LOUVER







Linear Filter

Trasforma il fascio di luce circolare in una **forma lineare**.
Ideale per applicazioni dove è necessaria una distribuzione
precisa e lineare della luce.



MAGNETIC 24V COCO

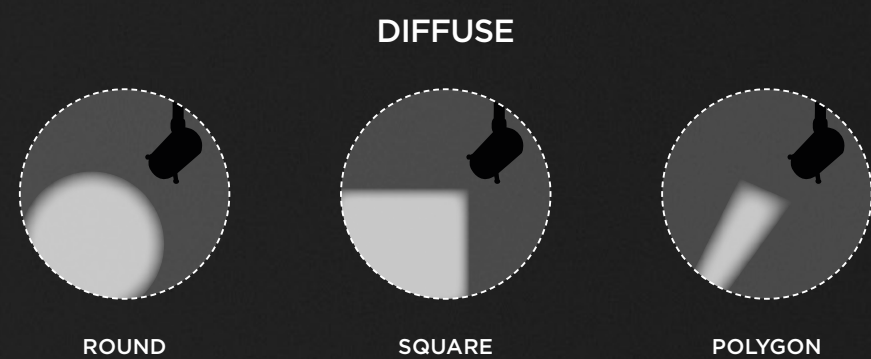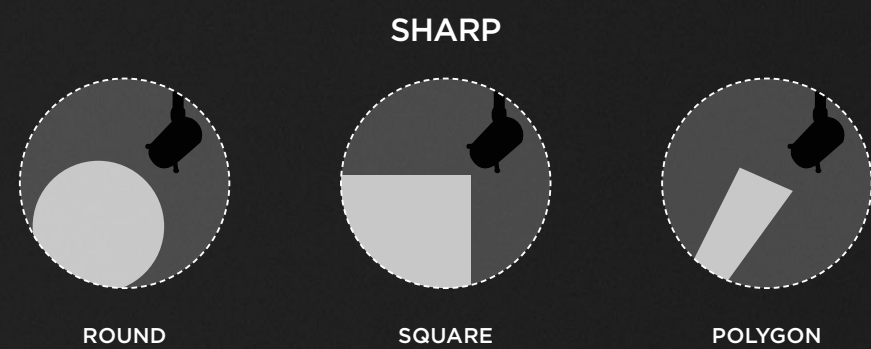

Coco Shaper

Crea delle scenografie uniche proiettando il contorno geometrico desiderato: circonferenze, poligoni quadrilateri o triangolari.



8:20h · 3700K



12:00h · 5000K



17:00h · 2700K

Tunable white


Versione disponibile per Coco 48V. Molto apprezzato in ambienti domestici, Hospitality, Uffici, ecc.

COCO
SPECIFICHE
TECNICHE





MAGNETIC 24V COCO



OPTIONAL ACCESSORIES				
COCO Anti-glare Honeycomb Louver**				
A498-90-00-	WT	NT		
			NOT SOLD SEPARATELY	
COCO Anti-glare Screen**				
A498-90-01-	WT	NT		
			NOT SOLD SEPARATELY	
COCO Linear Filter**				
A498-90-02-	WT	NT		
			SUITABLE FOR BEAM $\leq 34^\circ$ NOT SOLD SEPARATELY	
COCO High Chromatic Led**				
NOT SOLD SEPARATELY				
TRIMLESS TOOL D16 X D34mm				
A478-00-00				

		P	CCT	Beam	Flux	LOR
MAGNETIC 24V COCO	A499-00-10- WT NT	8,7W	2700K	20°	1200 lm	87%
	A499-00-11- WT NT	8,7W	3000K	20°	1250 lm	87%
	A499-00-13- WT NT	8,7W	3500K	20°	1310 lm	87%
	A499-00-12- WT NT	8,7W	4000K	20°	1340 lm	87%
	A499-00-20- WT NT	8,7W	2700K	34°	1200 lm	89%
	A499-00-21- WT NT	8,7W	3000K	34°	1250 lm	89%
	A499-00-23- WT NT	8,7W	3500K	34°	1310 lm	89%
	A499-00-22- WT NT	8,7W	4000K	34°	1340 lm	89%
	A499-00-30- WT NT	8,7W	2700K	48°	1200 lm	86%
	A499-00-31- WT NT	8,7W	3000K	48°	1250 lm	86%
	A499-00-33- WT NT	8,7W	3500K	48°	1310 lm	86%
	A499-00-32- WT NT	8,7W	4000K	48°	1340 lm	86%

24 V | IP20 | CRI>90 | L80B10 > 66.000 h

MacAdam Step 2 EXCL* 360° 90° 20° / 34° / 48°



		P	CCT	Beam	Flux	LOR
MAGNETIC 24V COCO Super Spot	A499-00-00- WT NT	6 W	2700K	12°	750 lm	66 %
	A499-00-01- WT NT	6 W	3000K	12°	800 lm	66 %
	A499-00-03- WT NT	6 W	3500K	12°	830 lm	66 %
	A499-00-02- WT NT	6 W	4000K	12°	850 lm	66 %

24 V | IP20 | CRI>90 | L80B10 > 55.000 h

MacAdam Step 2 EXCL* 360° 90° 12°


MAGNETIC 24V CONNECTOR A435-01-00 | W | N |

* MANDATORY FOR INSTALLATION

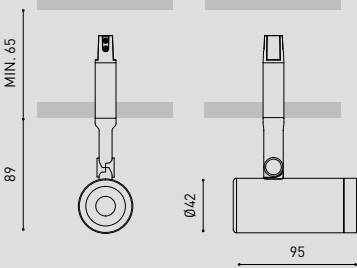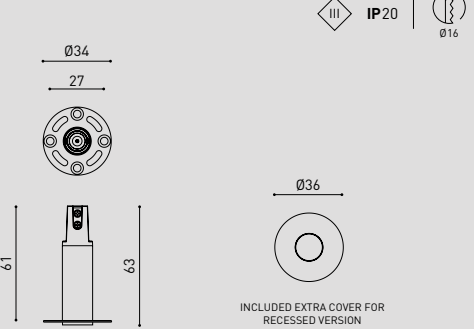


		P	V	D (A x B x C)
24V POWER SUPPLY	0434-01-37	60W	24V	180 x 52 x 30mm
	0433-10-22	100W	24V	295 x 43 x 30mm

220-240 V~ | MANDATORY FOR INSTALLATION | MUST BE PLACED ON REMOTE



24V DIMMER	0433-01-32	DALI / Push	24V	181 x 42 x 20mm
	0433-01-35	CASAMBI	24V	72,6 x 30 x 18mm

24 V | MUST BE PLACED ON REMOTE
OTHER DIM OPTIONS PLEASE CONSULT DROP VOLTAGE » 367



COLOUR | WT | NT | MATERIAL | AL | PC/PMMA | PLEASE CONSULT »

OTHER CCT OPTIONS PLEASE CONSULT
** AFFECTS THE LIGHTING PARAMETERS



OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COCO Anti-glare Honeycomb Louver

A498-90-00- | WT | NT |



COCO Anti-glare Screen

A498-90-01- | WT | NT |



COCO Linear Filter

A498-90-02- | WT | NT |



SUITABLE FOR BEAM ≤ 34°

COCO High Chromatic Led

COCO RECESSED

		P	CCT	Beam	I	Flux	LOR**
COCO Recessed	A530-0- Ⓞ -10- WT NT	8,7W	2700K	20°	500mA	1200 lm	87%
	A530-0- Ⓞ -11- WT NT	8,7W	3000K	20°	500mA	1250 lm	87%
	A530-0- Ⓞ -13- WT NT	8,7W	3500K	20°	500mA	1310 lm	87%
	A530-0- Ⓞ -12- WT NT	8,7W	4000K	20°	500mA	1340 lm	87%
	A530-0- Ⓞ -20- WT NT	8,7W	2700K	34°	500mA	1200 lm	89%
	A530-0- Ⓞ -21- WT NT	8,7W	3000K	34°	500mA	1250 lm	89%
	A530-0- Ⓞ -23- WT NT	8,7W	3500K	34°	500mA	1310 lm	89%
	A530-0- Ⓞ -22- WT NT	8,7W	4000K	34°	500mA	1340 lm	89%
	A530-0- Ⓞ -30- WT NT	8,7W	2700K	48°	500mA	1200 lm	86%
	A530-0- Ⓞ -31- WT NT	8,7W	3000K	48°	500mA	1250 lm	86%
	A530-0- Ⓞ -33- WT NT	8,7W	3500K	48°	500mA	1310 lm	86%
	A530-0- Ⓞ -32- WT NT	8,7W	4000K	48°	500mA	1340 lm	86%

220
240

V~



IP20

|

CRI>90

|

L80B10
> 66.000 h



MacAdam
Step 2



OPTIONS*



INCL



Ø50



350°



90°



20° / 34° / 48°

COCO Recessed Super Spot	A530-0- Ⓞ -00- WT NT	6W	2700K	12°	500mA	750 lm	66%
	A530-0- Ⓞ -01- WT NT	6W	3000K	12°	500mA	800 lm	66%
	A530-0- Ⓞ -03- WT NT	6W	3500K	12°	500mA	830 lm	66%
	A530-0- Ⓞ -02- WT NT	6W	4000K	12°	500mA	850 lm	66%

220
240

V~



IP20

|

CRI>90

|

L80B10
> 55.000 h



MacAdam
Step 2



OPTIONS*



INCL



Ø50



350°



90°



12°

COCO Recessed Tunable White	A530-12-17- WT NT	8,5W	1800-4000K	28°	500mA	850 lm	85%
	A530-12-18- WT NT	8,5W	2700-5000K	28°	500mA	1010 lm	85%
	A530-12-27- WT NT	8,5W	1800-4000K	42°	500mA	850 lm	87%
	A530-12-28- WT NT	8,5W	2700-5000K	42°	500mA	1010 lm	87%
	A530-12-37- WT NT	8,5W	1800-4000K	54°	500mA	850 lm	84%
	A530-12-38- WT NT	8,5W	2700-5000K	54°	500mA	1010 lm	84%

220
240

V~



IP20

|

CRI>90

|

L80B10
> 55.000 h



MacAdam
Step 3



DALI*



INCL



Ø50



350°



90°



28° / 42° / 54°



Ⓞ *OPTIONS

2	DIM DALI
5	DIM Phase Cut
7	DIM On Board

MIN. 70 (DIM PHASE CUT)

MIN. 85 (DIM ON BOARD)

MIN. 110 (DIM DALI)



COLOUR | WT □ | NT ■ |

MATERIAL | AL | PC/PMMA |

PLEASE CONSULT » (Ⓞ)

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
OTHER CCT & DIM OPTIONS PLEASE CONSULT



OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COCO M Anti-glare Honeycomb Louver

A553-90-00- | WT | NT |




COCO M Anti-glare Screen

A553-90-01- | WT | NT |



COCO M Linear Filter

A553-90-02- | WT | NT |



COCO M High Chromatic Led

COCO M RECESSED

		P	CCT	Beam	I	Flux	LOR
COCO M Recessed	A555-0- Ⓞ -10- WT NT	11,6W	2700K	32°	350mA	2080 lm	81%
	A555-0- Ⓞ -11- WT NT	11,6W	3000K	32°	350mA	2160 lm	81%
	A555-0- Ⓞ -13- WT NT	11,6W	3500K	32°	350mA	2190 lm	81%
	A555-0- Ⓞ -12- WT NT	11,6W	4000K	32°	350mA	2200 lm	81%
	A555-0- Ⓞ -20- WT NT	11,6W	2700K	43°	350mA	2080 lm	86%
	A555-0- Ⓞ -21- WT NT	11,6W	3000K	43°	350mA	2160 lm	86%
	A555-0- Ⓞ -23- WT NT	11,6W	3500K	43°	350mA	2190 lm	86%
	A555-0- Ⓞ -22- WT NT	11,6W	4000K	43°	350mA	2200 lm	86%
	A555-0- Ⓞ -30- WT NT	11,6W	2700K	53°	350mA	2080 lm	86%
	A555-0- Ⓞ -31- WT NT	11,6W	3000K	53°	350mA	2160 lm	86%
	A555-0- Ⓞ -33- WT NT	11,6W	3500K	53°	350mA	2190 lm	86%
	A555-0- Ⓞ -32- WT NT	11,6W	4000K	53°	350mA	2200 lm	86%

220
240 V~ |  IP20 | CRI>90 | L80B10
>66.000 h

 MacAdam
Step 2

 OPTIONS*

 INCL

 Ø62

 350°

 90°

 32° / 43° / 53°

		P	CCT	Beam	I	Flux	LOR
COCO M Recessed Super Spot	A555-0- Ⓞ -00- WT NT	8,7W	2700K	13°	500mA	1230 lm	67%
	A555-0- Ⓞ -01- WT NT	8,7W	3000K	13°	500mA	1300 lm	67%
	A555-0- Ⓞ -03- WT NT	8,7W	3500K	13°	500mA	1360 lm	67%
	A555-0- Ⓞ -02- WT NT	8,7W	4000K	13°	500mA	1400 lm	67%

220
240 V~ |  IP20 | CRI>90 | L80B10
>66.000 h

 MacAdam
Step 2

 OPTIONS*

 INCL

 Ø62

 350°

 90°

 13°

		P	CCT	Beam	I	Flux	LOR
COCO M Recessed Tunable White	A555-12-17- WT NT	11,3W	1800-4000K	28°	350mA	1250 lm	84%
	A555-12-18- WT NT	11,3W	2700-5000K	28°	350mA	1510 lm	84%
	A555-12-27- WT NT	11,3W	1800-4000K	41°	350mA	1250 lm	90%
	A555-12-28- WT NT	11,3W	2700-5000K	41°	350mA	1510 lm	90%
	A555-12-37- WT NT	11,3W	1800-4000K	55°	350mA	1250 lm	89%
	A555-12-38- WT NT	11,3W	2700-5000K	55°	350mA	1510 lm	89%

220
240 V~ |  IP20 | CRI>90 | L80B10
>95.000 h

 MacAdam
Step 3

 DALI+

 INCL

 Ø62


 350°

 90°

 28° / 41° / 55°

Ⓞ	*OPTIONS
2	DIM DALI
5	DIM Phase Cut

OTHER DIM OPTIONS PLEASE CONSULT

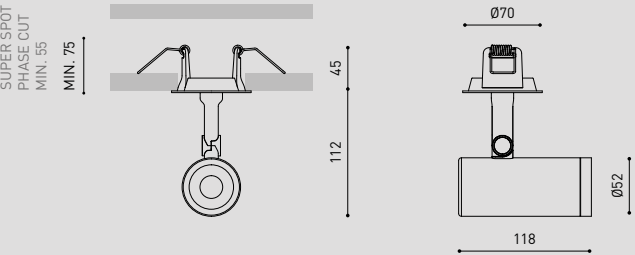

COLOUR | WT  | NT  | MATERIAL |  AL |  PC/PMMA | PLEASE CONSULT » 

OTHER CCT PLEASE CONSULT



COCO SURFACE

OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COCO Anti-glare Honeycomb Louver

A498-90-00- | WT | NT |



COCO Anti-glare Screen

A498-90-01- | WT | NT |



COCO Linear Filter

A498-90-02- | WT | NT |



SUITABLE FOR BEAM ≤ 34°

COCO High Chromatic Led

		P	CCT	Beam	I	Flux	LOR
COCO Surface	A536-0- Ⓞ -10- WT NT	8,7W	2700K	20°	500mA	1200 lm	87%
	A536-0- Ⓞ -11- WT NT	8,7W	3000K	20°	500mA	1250 lm	87%
	A536-0- Ⓞ -13- WT NT	8,7W	3500K	20°	500mA	1310 lm	87%
	A536-0- Ⓞ -12- WT NT	8,7W	4000K	20°	500mA	1340 lm	87%
	A536-0- Ⓞ -20- WT NT	8,7W	2700K	34°	500mA	1200 lm	89%
	A536-0- Ⓞ -21- WT NT	8,7W	3000K	34°	500mA	1250 lm	89%
	A536-0- Ⓞ -23- WT NT	8,7W	3500K	34°	500mA	1310 lm	89%
	A536-0- Ⓞ -22- WT NT	8,7W	4000K	34°	500mA	1340 lm	89%
	A536-0- Ⓞ -30- WT NT	8,7W	2700K	48°	500mA	1200 lm	86%
	A536-0- Ⓞ -31- WT NT	8,7W	3000K	48°	500mA	1250 lm	86%
	A536-0- Ⓞ -33- WT NT	8,7W	3500K	48°	500mA	1310 lm	86%
	A536-0- Ⓞ -32- WT NT	8,7W	4000K	48°	500mA	1340 lm	86%

220
240

V~



IP20

|

CRI>90

|

L80B10

>66.000h

MacAdam

Step 2

|

OPTIONS*

|

REMOTE

|

350°

|

90°

|

20° / 34° / 48°

		P	CCT	Beam	I	Flux	LOR
COCO Surface Super Spot	A536-0- Ⓞ -00- WT NT	6W	2700K	12°	500mA	750 lm	66%
	A536-0- Ⓞ -01- WT NT	6W	3000K	12°	500mA	800 lm	66%
	A536-0- Ⓞ -03- WT NT	6W	3500K	12°	500mA	830 lm	66%
	A536-0- Ⓞ -02- WT NT	6W	4000K	12°	500mA	850 lm	66%

220
240

V~



IP20

|

CRI>90

|

L80B10

>55.000h

MacAdam

Step 2

|

OPTIONS*

|

REMOTE

|

350°

|

90°

|

12°

Ⓞ *OPTIONS

2


DIM DALI

5

DIM Phase Cut

7

DIM On Board

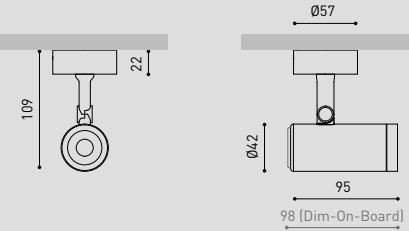

COLOUR | WT □ | NT ■ |

MATERIAL | AL | PC/PMMA |

PLEASE CONSULT »

OTHER CCT & DIM OPTIONS PLEASE CONSULT



OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COCO M Anti-glare Honeycomb Louver

A553-90-00- | WT | NT |



COCO M Anti-glare Screen

A553-90-01- | WT | NT |



COCO M Linear Filter

A553-90-02- | WT | NT |



SIUTABLE FOR BEAM ≤ 32°

COCO M High Chromatic Led

COCO M SURFACE

		P	CCT	Beam	I	Flux	LOR
COCO M Surface	A556-0- Ⓞ -10- WT NT	11,6W	2700K	32°	350mA	2080 lm	81%
	A556-0- Ⓞ -11- WT NT	11,6W	3000K	32°	350mA	2160 lm	81%
	A556-0- Ⓞ -13- WT NT	11,6W	3500K	32°	350mA	2190 lm	81%
	A556-0- Ⓞ -12- WT NT	11,6W	4000K	32°	350mA	2200 lm	81%
	A556-0- Ⓞ -20- WT NT	11,6W	2700K	43°	350mA	2080 lm	86%
	A556-0- Ⓞ -21- WT NT	11,6W	3000K	43°	350mA	2160 lm	86%
	A556-0- Ⓞ -23- WT NT	11,6W	3500K	43°	350mA	2190 lm	86%
	A556-0- Ⓞ -22- WT NT	11,6W	4000K	43°	350mA	2200 lm	86%
	A556-0- Ⓞ -30- WT NT	11,6W	2700K	53°	350mA	2080 lm	86%
	A556-0- Ⓞ -31- WT NT	11,6W	3000K	53°	350mA	2160 lm	86%
	A556-0- Ⓞ -33- WT NT	11,6W	3500K	53°	350mA	2190 lm	86%
	A556-0- Ⓞ -32- WT NT	11,6W	4000K	53°	350mA	2200 lm	86%

220
240

V~



IP20

CRI>90

L80B10
>66.000 h



OPTIONS*

REMOTE

350°

90°

32° / 43° / 53°

		P	CCT	Beam	I	Flux	LOR
COCO M Surface Super Spot	A556-0- Ⓞ -00- WT NT	8,7W	2700K	13°	500mA	1230 lm	67%
	A556-0- Ⓞ -01- WT NT	8,7W	3000K	13°	500mA	1300 lm	67%
	A556-0- Ⓞ -03- WT NT	8,7W	3500K	13°	500mA	1360 lm	67%
	A556-0- Ⓞ -02- WT NT	8,7W	4000K	13°	500mA	1400 lm	67%

220
240

V~



IP20

CRI>90

L80B10
>66.000 h



OPTIONS*

REMOTE

350°

90°


13°

Ⓞ *OPTIONS

2 DIM DALI

5 DIM Phase Cut

OTHER DIM OPTIONS PLEASE CONSULT

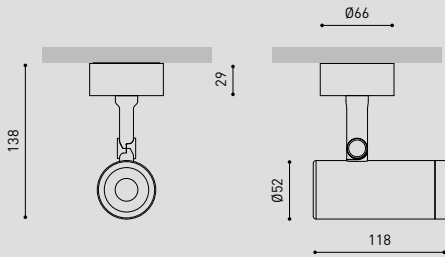

COLOUR | WT □ | NT ■ |

MATERIAL | AL | PC/PMMA |

PLEASE CONSULT »

OTHER CCT OPTIONS PLEASE CONSULT



OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COCO Anti-glare Honeycomb Louver

A498-90-00- | WT | NT |



COCO Anti-glare Screen

A498-90-01- | WT | NT |



COCO Linear Filter

A498-90-02- | WT | NT |



SIUTABLE FOR BEAM ≤ 34°

COCO High Chromatic Led

FINISHING	Lamp	Adaptor
WT	WT □ N ■	
NT	NT ■ N ■	
WTW	WT □ W □	
NTW	NT ■ W □	

COCO 48V

COCO 48V	+RE	P	CCT	Beam	Flux	LOR
A498-0- ② -10- WT NT WTW NTW -S		8,7W	2700K	20°	1200 lm	87%
A498-0- ② -11- WT NT WTW NTW -S		8,7W	3000K	20°	1250 lm	87%
A498-0- ② -13- WT NT WTW NTW -S		8,7W	3500K	20°	1310 lm	87%
A498-0- ② -12- WT NT WTW NTW -S		8,7W	4000K	20°	1340 lm	87%
A498-0- ② -20- WT NT WTW NTW -S		8,7W	2700K	34°	1200 lm	89%
A498-0- ② -21- WT NT WTW NTW -S		8,7W	3000K	34°	1250 lm	89%
A498-0- ② -23- WT NT WTW NTW -S		8,7W	3500K	34°	1310 lm	89%
A498-0- ② -22- WT NT WTW NTW -S		8,7W	4000K	34°	1340 lm	89%
A498-0- ② -30- WT NT WTW NTW -S		8,7W	2700K	48°	1200 lm	86%
A498-0- ② -31- WT NT WTW NTW -S		8,7W	3000K	48°	1250 lm	86%
A498-0- ② -33- WT NT WTW NTW -S		8,7W	3500K	48°	1310 lm	86%
A498-0- ② -32- WT NT WTW NTW -S		8,7W	4000K	48°	1340 lm	86%

48 V | ③ IP20 | CRI>90 | L80B10 > 66.000 h



COCO 48V Super Spot

A498-0- ② -00- WT NT WTW NTW -S	6W	2700K	12°	750 lm	66%
A498-0- ② -01- WT NT WTW NTW -S	6W	3000K	12°	800 lm	66%
A498-0- ② -03- WT NT WTW NTW -S	6W	3500K	12°	830 lm	66%
A498-0- ② -02- WT NT WTW NTW -S	6W	4000K	12°	850 lm	66%

48 V | ③ IP20 | CRI>90 | L80B10 > 55.000 h



COCO 48V Tunable White

A498-12-17- WT NT WTW NTW -S	8,5W	1800-4000K	28°	850 lm	85%
A498-12-18- WT NT WTW NTW -S	8,5W	2700-5000K	28°	1010 lm	85%
A498-12-27- WT NT WTW NTW -S	8,5W	1800-4000K	42°	850 lm	87%
A498-12-28- WT NT WTW NTW -S	8,5W	2700-5000K	42°	1010 lm	87%
A498-12-37- WT NT WTW NTW -S	8,5W	1800-4000K	54°	850 lm	84%
A498-12-38- WT NT WTW NTW -S	8,5W	2700-5000K	54°	1010 lm	84%


48 V | ③ IP20 | CRI>90 | L80B10 > 55.000 h



②	*OPTIONS
1	No DIM
2	DIM DALI
7	DIM ON BOARD

OTHER DIM OPTIONS PLEASE CONSULT

+RE	REF. ENDING	EXAMPLE
Ø	Track 48V	A4980110WT
-S	Track 48V Short	A4980110WT-S

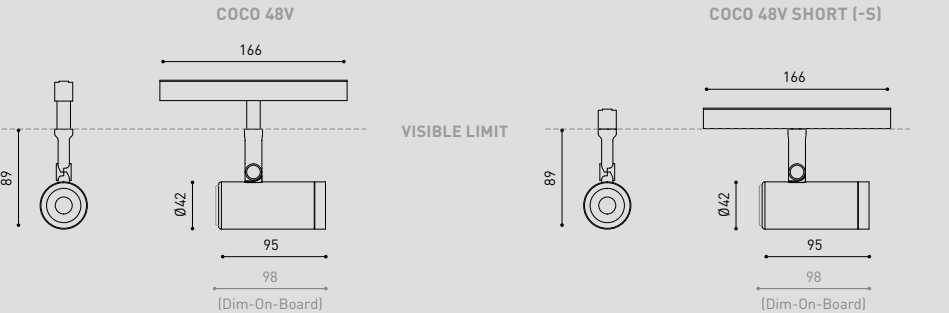

MATERIAL | ④ AL | ⑤ PC/PMMA |

PLEASE CONSULT » ⑥ ⑦ ⑧

OTHER CCT PLEASE CONSULT

*RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE
(AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).



COCO M 48V

OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COCO M Anti-glare Honeycomb Louver

A553-90-00- | WT | NT |



COCO M Anti-glare Screen

A553-90-01- | WT | NT |



COCO M Linear Filter

A553-90-02- | WT | NT |



SIUTABLE FOR BEAM ≤ 32°

COCO M High Chromatic Led

FINISHING	Lamp	Adaptor
WT	WT □ N ■	
NT	NT ■ N ■	
WTW	WT □ W □	
NTW	NT ■ W □	

COCO M 48V	+RE	P	CCT	Beam	Flux	LOR
A553-0- ② -10- WT NT WTW NTW -S		11,6W	2700K	32°	2080 lm	81%
A553-0- ② -11- WT NT WTW NTW -S		11,6W	3000K	32°	2160 lm	81%
A553-0- ② -13- WT NT WTW NTW -S		11,6W	3500K	32°	2190 lm	81%
A553-0- ② -12- WT NT WTW NTW -S		11,6W	4000K	32°	2200 lm	81%
A553-0- ② -20- WT NT WTW NTW -S		11,6W	2700K	43°	2080 lm	86%
A553-0- ② -21- WT NT WTW NTW -S		11,6W	3000K	43°	2160 lm	86%
A553-0- ② -23- WT NT WTW NTW -S		11,6W	3500K	43°	2190 lm	86%
A553-0- ② -22- WT NT WTW NTW -S		11,6W	4000K	43°	2200 lm	86%
A553-0- ② -30- WT NT WTW NTW -S		11,6W	2700K	53°	2080 lm	86%
A553-0- ② -31- WT NT WTW NTW -S		11,6W	3000K	53°	2160 lm	86%
A553-0- ② -33- WT NT WTW NTW -S		11,6W	3500K	53°	2190 lm	86%
A553-0- ② -32- WT NT WTW NTW -S		11,6W	4000K	53°	2200 lm	86%

48 V | ③ IP20 | CRI>90 | L80B10 > 66.000 h



COCO M 48V Super Spot

A553-0- ② -00- WT NT WTW NTW -S	8,7W	2700K	13°	1230 lm	67%
A553-0- ② -01- WT NT WTW NTW -S	8,7W	3000K	13°	1300 lm	67%
A553-0- ② -03- WT NT WTW NTW -S	8,7W	3500K	13°	1360 lm	67%
A553-0- ② -02- WT NT WTW NTW -S	8,7W	4000K	13°	1400 lm	67%

48 V | ③ IP20 | CRI>90 | L80B10 > 66.000 h



COCO M 48V Tunable White

A553-12-17- WT NT WTW NTW -S	11,3W	1800-4000K	28°	1250 lm	84%
A553-12-18- WT NT WTW NTW -S	11,3W	2700-5000K	28°	1510 lm	84%
A553-12-27- WT NT WTW NTW -S	11,3W	1800-4000K	41°	1250 lm	90%
A553-12-28- WT NT WTW NTW -S	11,3W	2700-5000K	41°	1510 lm	90%
A553-12-37- WT NT WTW NTW -S	11,3W	1800-4000K	55°	1250 lm	89%
A553-12-38- WT NT WTW NTW -S	11,3W	2700-5000K	55°	1510 lm	89%


48 V | ③ IP20 | CRI>90 | L80B10 > 55.000 h



②	*OPTIONS
1	No DIM
2	DIM DALI

OTHER DIM OPTIONS PLEASE CONSULT

+RE	REF. ENDING	EXAMPLE
Ø	Track 48V	A5530110WT
-S	Track 48V Short	A5530110WT-S

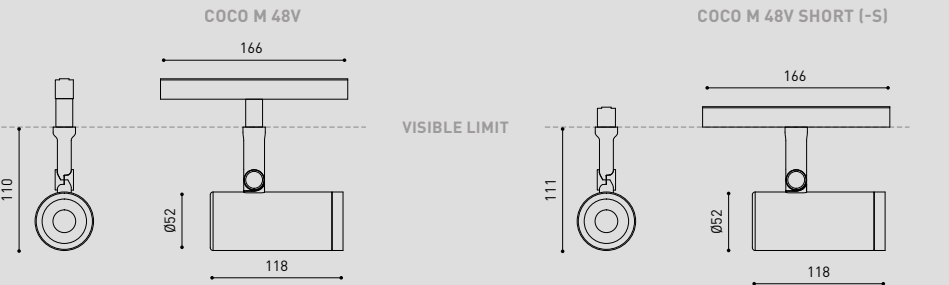

MATERIAL | ④ AL | ⑤ PC/PMMA |

PLEASE CONSULT » ⑥ ⑦ ⑧

OTHER CCT PLEASE CONSULT

*RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE
(AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).



OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COCO M Anti-glare Honeycomb Louver

A553-90-00- | WT | NT |



COCO M Anti-glare Screen

A553-90-01- | WT | NT |



COCO M Linear Filter

A553-90-02- | WT | NT |



SIUTABLE FOR BEAM ≤ 32°

COCO M High Chromatic Led

COCO M 3L

		P	CCT	Beam	I	Flux	LOR
COCO M 3L	A554-0- ☯ -10- WT NT	11,6W	2700K	32°	350mA	2080 lm	81%
	A554-0- ☯ -11- WT NT	11,6W	3000K	32°	350mA	2160 lm	81%
	A554-0- ☯ -13- WT NT	11,6W	3500K	32°	350mA	2190 lm	81%
	A554-0- ☯ -12- WT NT	11,6W	4000K	32°	350mA	2200 lm	81%
	A554-0- ☯ -20- WT NT	11,6W	2700K	43°	350mA	2080 lm	86%
	A554-0- ☯ -21- WT NT	11,6W	3000K	43°	350mA	2160 lm	86%
	A554-0- ☯ -23- WT NT	11,6W	3500K	43°	350mA	2190 lm	86%
	A554-0- ☯ -22- WT NT	11,6W	4000K	43°	350mA	2200 lm	86%
	A554-0- ☯ -30- WT NT	11,6W	2700K	53°	350mA	2080 lm	86%
	A554-0- ☯ -31- WT NT	11,6W	3000K	53°	350mA	2160 lm	86%
	A554-0- ☯ -33- WT NT	11,6W	3500K	53°	350mA	2190 lm	86%
	A554-0- ☯ -32- WT NT	11,6W	4000K	53°	350mA	2200 lm	86%

220
240 V~ | ☐ IP20 | CRI>90 | L80B10
> 66.000 h



		P	CCT	Beam	I	Flux	LOR
COCO M 3L Super Spot	A554-0- ☯ -00- WT NT	8,7W	2700K	13°	500mA	1230 lm	67%
	A554-0- ☯ -01- WT NT	8,7W	3000K	13°	500mA	1300 lm	67%
	A554-0- ☯ -03- WT NT	8,7W	3500K	13°	500mA	1360 lm	67%
	A554-0- ☯ -02- WT NT	8,7W	4000K	13°	500mA	1400 lm	67%


220
240 V~ | ☐ IP20 | CRI>90 | L80B10
> 66.000 h



☯ *OPTIONS

1	No DIM
2	DIM DALI

OTHER DIM OPTIONS PLEASE CONSULT

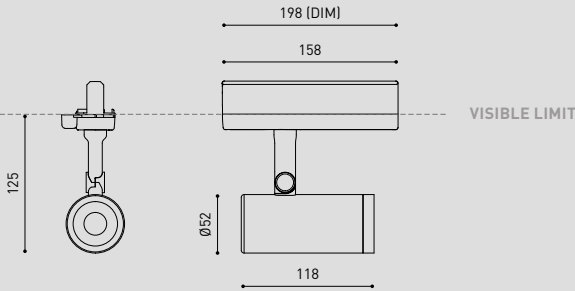

COLOUR | WT ☐ | NT ■ |

MATERIAL | ☐ AL | ☐ PC/PMMA |

PLEASE CONSULT » ☎

OTHER CCT OPTIONS PLEASE CONSULT

OPTIONAL ACCESSORIES



COCO



COCO SUPER SPOT



COCO ANTI-GLARE HONEYCOMB LOUVER



COCO LINEAR FILTER



COCO ANTI-GLARE SCREEN

FINISHINGS




NT



WT



NTW



WTW



NT



WT



NT SUPER SPOT



WT SUPER SPOT



NT



WT



NT SUPER SPOT



WT SUPER SPOT



COCO SHAPER RECESSED

		P	CCT	Beam	I	Flux	LOR
COCO SHAPER Recessed	A519-1- ☯ -00- NT	6W	2700K	20°-33°	500mA	650 lm	40-38%
	A519-1- ☯ -01- NT	6W	3000K	20°-33°	500mA	680 lm	40-38%
	A519-1- ☯ -02- NT	6W	4000K	20°-33°	500mA	730 lm	40-38%
	A519-1- ☯ -10- NT	6W	2700K	53°	500mA	650 lm	37%
	A519-1- ☯ -11- NT	6W	3000K	53°	500mA	680 lm	37%
	A519-1- ☯ -12- NT	6W	4000K	53°	500mA	730 lm	37%


220
240 V~ |  IP20 | CRI>90 | L80B10
>60.000 h



☯ *OPTIONS

1	No DIM
2	DIM DALI

OTHER DIM OPTIONS
PLEASE CONSULT

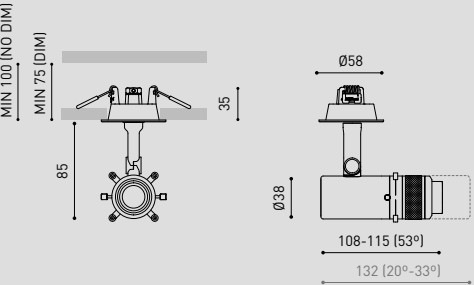

COLOUR | NT ■ | MATERIAL |  AL |  OPTICAL GLASS |

PLEASE CONSULT » 

OTHER CCT PLEASE CONSULT
CUSTOM GOBO PLEASE CONSULT



COCO SHAPER SURFACE

			P	CCT	Beam	I	Flux	LOR
COCO SHAPER Surface	A537-0-	⊗ -00- NT	6W	2700K	20°-33°	500mA	650 lm	40-38%
	A537-0-	⊗ -01- NT	6W	3000K	20°-33°	500mA	680 lm	40-38%
	A537-0-	⊗ -02- NT	6W	4000K	20°-33°	500mA	730 lm	40-38%
	A537-0-	⊗ -10- NT	6W	2700K	53°	500mA	650 lm	37%
	A537-0-	⊗ -11- NT	6W	3000K	53°	500mA	680 lm	37%
	A537-0-	⊗ -12- NT	6W	4000K	53°	500mA	730 lm	37%

220
240 V~ |  IP20 | CRI>90 | L80B10
>60.000 h

 MacAdam
Step 2

 OPTIONS*

 REMOTE


 350°

 90°

 20° - 33° / 53°

⊗	*OPTIONS
1	No DIM
2	DIM DALI

OTHER DIM OPTIONS
PLEASE CONSULT

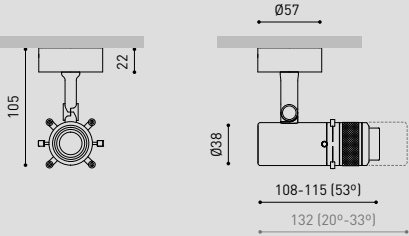

COLOUR | NT ■ | MATERIAL |  AL |  OPTICAL GLASS |

PLEASE CONSULT » 

OTHER CCT PLEASE CONSULT
CUSTOM GOBO PLEASE CONSULT

COCO SHAPER 48V



COCO SHAPER 48V							+RE	P	CCT	Beam	I	Flux	LOR	
A519-0-	⊙	-00-		NT		NTW		-S	6W	2700K	20°-33°	500mA	650 lm	40-38%
A519-0-	⊙	-01-		NT		NTW		-S	6W	3000K	20°-33°	500mA	680 lm	40-38%
A519-0-	⊙	-02-		NT		NTW		-S	6W	4000K	20°-33°	500mA	730 lm	40-38%
A519-0-	⊙	-10-		NT		NTW		-S	6W	2700K	53°	500mA	650 lm	37%
A519-0-	⊙	-11-		NT		NTW		-S	6W	3000K	53°	500mA	680 lm	37%
A519-0-	⊙	-12-		NT		NTW		-S	6W	4000K	53°	500mA	730 lm	37%

48 V | IP20 | CRI>90 | L80B10 >60.000 h

MacAdam Step 2

OPTIONS*

INCL

TRACK 48V


360°

90°

20° - 33° / 53°

⊙	*OPTIONS	+RE	REF. ENDING	EXAMPLE	FINISHING	Lamp	Adaptor
1	No DIM	Ø	Track 48V	A5190110NT	NT	NT ■ N ■	
2	DIM DALI	-S	Track 48V Short	A5190110NT-S	NTW	NT ■ W □	

OTHER DIM OPTIONS
PLEASE CONSULT

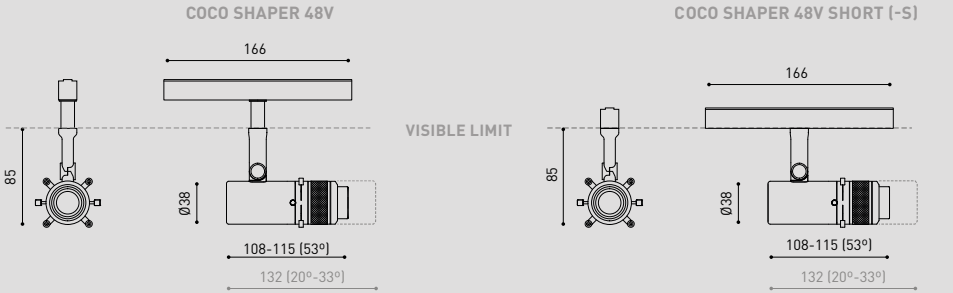

COLOUR | NT ■ | MATERIAL | AL | OPTICAL GLASS | PLEASE CONSULT »

OTHER CCT PLEASE CONSULT
*RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE
(AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).
CUSTOM GOBO PLEASE CONSULT

BEAM & FINISHINGS



53° | NT



20°- 33° | NT



53° | NT



20°- 33° | NT



53° | NTW



20°- 33° | NTW

CO
CO

by ARKOSLIGHT