





DIMENSIONS




| | |
|-----------------------------|-------------------------------------|
| PRODUCT | |
| Name | REC 2700K WT |
| Reference | A2560010WT |
| Color | Textured white |
| RAL | 9016 |
| Category | WALL & FLOOR LIGHTS |
| LIGHTING INFORMATION | |
| Light source | LED |
| Gross luminous flux | 5200 Lm |
| Power | 39,5 W |
| Power values of the system | 42,93 W |
| Colour temperature | 2700 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | Mac Adam Step 2 |
| Lighting efficiency | 85% |
| Efficacy | 132 Lm/W |
| Current intensity | 400 mA |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | ⊕ |
| Voltage | 220 V/240 V |
| Frequency | 50/60 Hz |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tc=80°C) >60.000h |
| OTHER DATA | |
| Ingress Protection | IP20 |
| Weight | 1830 g. |
| Packaged weight | 1983,8 g. |
| Packaging dimensions | 384 × 180 × 44 mm. |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |



Rec is a LED appliance that is especially ideal to carry out indirect lighting functions. This is a luminaire that perfectly fits into projects that prioritise the comfort given by indirect lighting but also require a high volume of light. Formally, Rec is expressed in a slender cuboid with pure lines and a minimalist design.

POLAR DIAGRAM

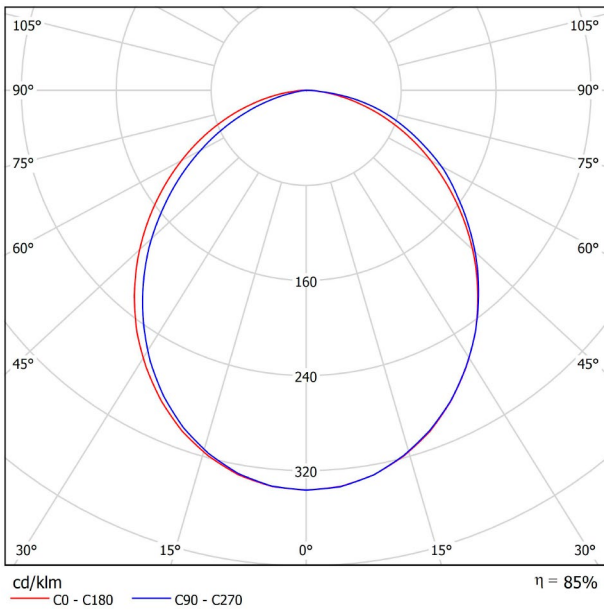

CONICAL DIAGRAM

