


## DIMENSIONS



Name	FIFTY H0 RECESSED 120 DIM DALI/PUSH 4000K NT
Reference	A2910222NT
Color	Textured black
Power of the system	9005
Category	CEILING RECESSED

## PRODUCT

## LIGHTING INFORMATION

LED

4400 Lm

30,8 W

35 W

4000 K

CRI&gt;90

Mac Adam Step 2

102°

70%

143 Lm/W

900 mA

DALI / Push

Please Consult

Included



220 V/240 V

50/60 Hz

A+

L80B10 (Tc=80°C) &gt;60.000h

## OTHER DATA

IP20

1148 × 58 mm.

Yes

4730 g.

6440 g.

Ø168 × 1305 mm.

1

Aluminium / Polycarbonate




Light source	LED
Gross luminous flux	4400 Lm
Power	30,8 W
Power values of the system	35 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	102°
Lighting efficiency	70%
Efficacy	143 Lm/W
Current intensity	900 mA
Dimming	DALI / Push
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h

Ingress Protection	IP20
Recess measurements	1148 × 58 mm.
Diffuser included	Yes
Weight	4730 g.
Packaged weight	6440 g.
Packaging dimensions	Ø168 × 1305 mm.
Units per package	1
Materials	Aluminium / Polycarbonate

Fifty is the recessed LED profile of Arkoslight. Fifty, also available in trimless version, it's ideal for longitudinal lighting solutions, where its diffuser contributes to light up in a functional way. On the whole, this profile is capable of assuming the task of highlighting the different lines, volumes or lanes which are defined in the architecture of spaces.

POLAR DIAGRAM

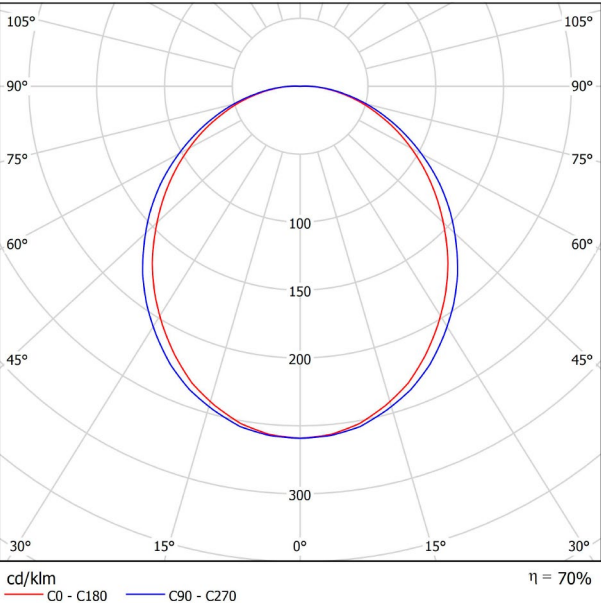

CONICAL DIAGRAM

