


DIMENSIONS



Name	FIFTY H0 RECESSED 150 DIM DALI/PUSH 3000K NT
Reference	A2910321NT
Color	Textured black
Power of the system	9005
Category	CEILING RECESSED

PRODUCT

LIGHTING INFORMATION

LED

5375 Lm

38,5 W

43,75 W

3000 K

CRI>90

Mac Adam Step 2

102°

70%

140 Lm/W

900 mA

DALI / Push

Please Consult

Included



220 V/240 V

50/60 Hz

A+

L80B10 (Tc=80°C) >60.000h

OTHER DATA

IP20

1432 x 58 mm.

Yes

5920 g.

8170 g.

Ø168 x 1590 mm.

1

Aluminium / Polycarbonate




Light source	LED
Gross luminous flux	5375 Lm
Power	38,5 W
Power values of the system	43,75 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	102°
Lighting efficiency	70%
Efficacy	140 Lm/W
Current intensity	900 mA
Dimming	DALI / Push
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h

Ingress Protection	IP20
Recess measurements	1432 x 58 mm.
Diffuser included	Yes
Weight	5920 g.
Packaged weight	8170 g.
Packaging dimensions	Ø168 x 1590 mm.
Units per package	1
Materials	Aluminium / Polycarbonate

Fifty is the recessed LED profile of Arkoslight. Fifty, also available in trimless version, it's ideal for longitudinal lighting solutions, where its diffuser contributes to light up in a functional way. On the whole, this profile is capable of assuming the task of highlighting the different lines, volumes or lanes which are defined in the architecture of spaces.

POLAR DIAGRAM

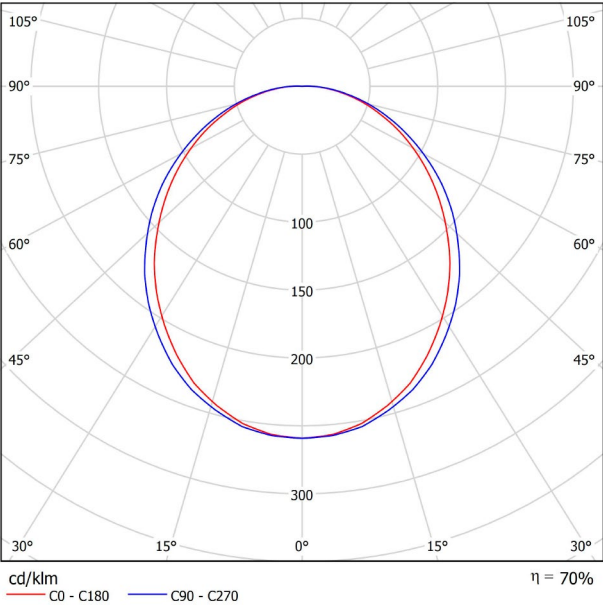

CONICAL DIAGRAM

