




DIMENSIONS



ACCESSORIES

CUSTOM ACCESSORIES
(MANDATORY)

Name	FIFTY H0 RECESSED CUSTOM 150 DIM DALI/PUSH 3000K NT
Reference	A2911321NT
Color	Textured black
Power of the system	9005
Category	CUSTOM SYSTEMS

PRODUCT

Name	FIFTY H0 RECESSED CUSTOM 150 DIM DALI/PUSH 3000K NT
Reference	A2911321NT
Color	Textured black
Power of the system	9005
Category	CUSTOM SYSTEMS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	5375 Lm
Power	38,5 W
Power values of the system	43,75 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	102°
Lighting efficiency	70%
Efficacy	140 Lm/W
Current intensity	900 mA
Dimming	DALI / Push
Control through bluetooth	Please Consult
Driver	Included - Fast Connect
Electrical insulation class	⏚
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	1432 × 58 mm.
Diffuser included	Yes
Weight	5920 g.
Packaged weight	8170 g.
Packaging dimensions	Ø168 × 1590 mm.
Units per package	1
Materials	Aluminium / Polycarbonate




Fifty Custom, is Arkoslight's profile solution for surface, recessed, suspension or wall applications for lighting projects where a very specific length is required. A tailored suit.

POLAR DIAGRAM

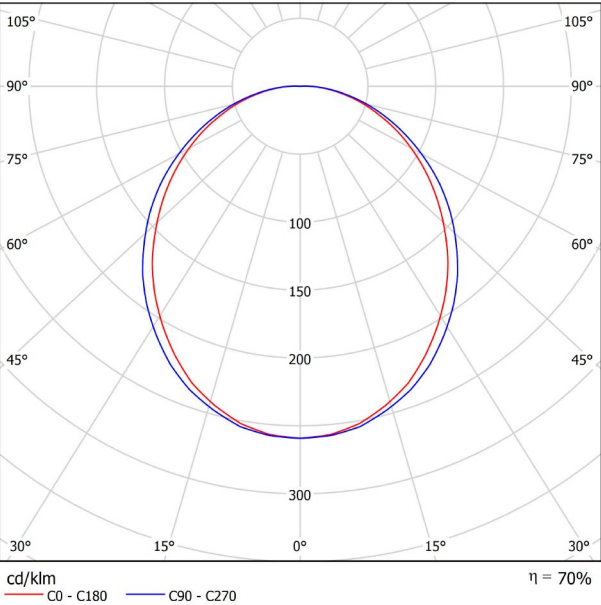


CONICAL DIAGRAM

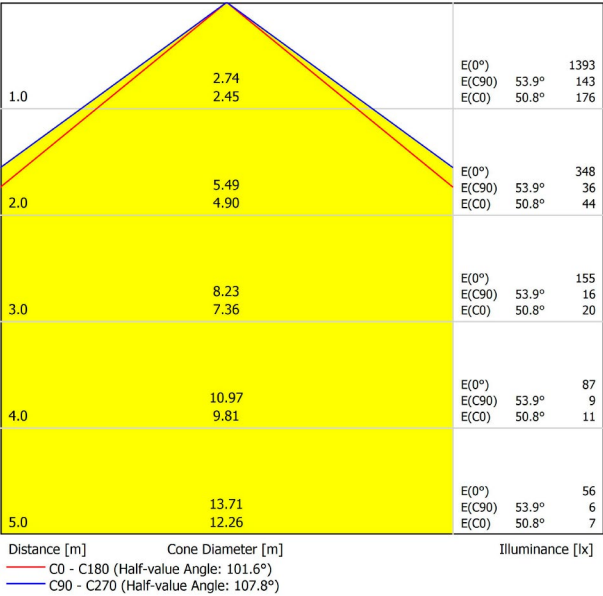

FIFTY 2 End Cap Kit Recessed 1050-00-20- | WT | NT |

FIFTY Straight Joiner 1050-01-80

FIFTY Power Line A231-00-00

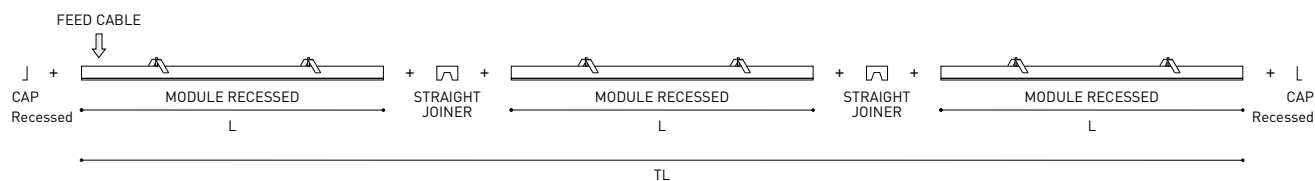

COLOUR | WT ☐ RAL 9016 | NT ☒ RAL 9005 |

MATERIAL |  AL |