


## DIMENSIONS




<b>PRODUCT</b>	
Name	REC MINI 3000K WT
Reference	A3080011WT
Color	Textured white
RAL	9016
Category	WALL & FLOOR LIGHTS
<b>LIGHTING INFORMATION</b>	
Light source	LED
Gross luminous flux	2650 Lm
Power	20 W
Power values of the system	23,53 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Lighting efficiency	75%
Efficacy	133 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h
<b>OTHER DATA</b>	
Ingress Protection	IP20
Weight	900 g.
Packaged weight	975 g.
Packaging dimensions	232 × 190 × 48 mm.
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate



Rec is a LED appliance that is especially ideal to carry out indirect lighting functions. This is a luminaire that perfectly fits into projects that prioritise the comfort given by indirect lighting but also require a high volume of light. Formally, Rec is expressed in a slender cuboid with pure lines and a minimalist design.


POLAR DIAGRAM

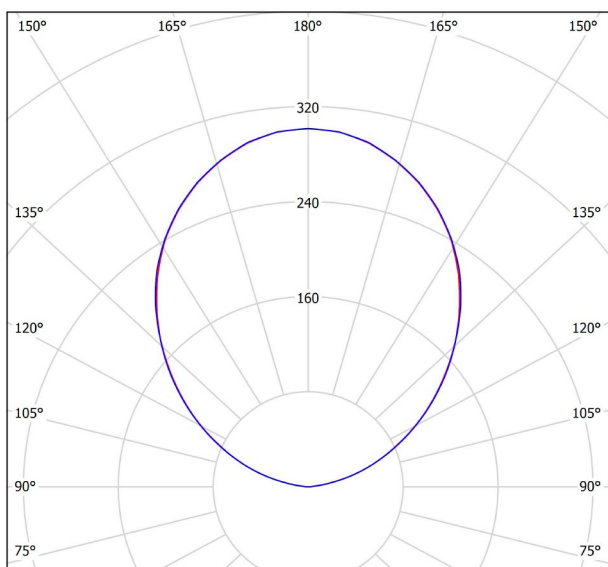

cd/klm  
 — C0 - C180 — C90 - C270

η = 75%

CONICAL DIAGRAM

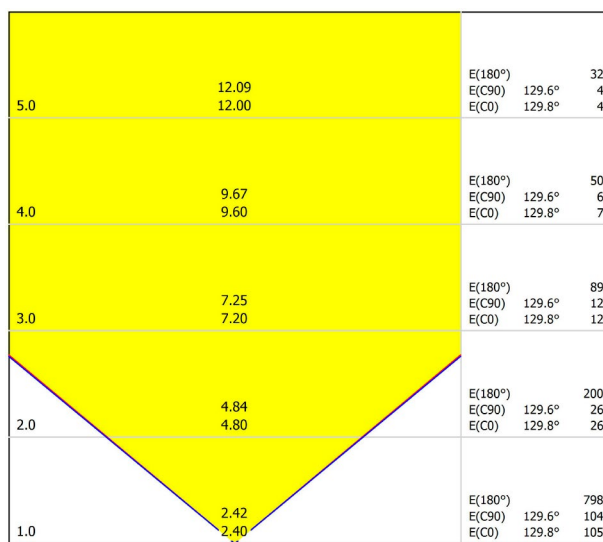

Distance [m]      Cone Diameter [m]      Illuminance [lx]  
 — C0 - C180 (Half-value Angle: 100.4°)  
 — C90 - C270 (Half-value Angle: 100.8°)