




DIMENSIONS




| | |
|-----------------------------|-------------------------------------|
| Name | REC DOUBLE 4000K NT |
| Reference | A3090012NT |
| Color | Textured black |
| RAL | 9005 |
| Category | WALL & FLOOR LIGHTS |
| PRODUCT | |
| Light source | LED |
| Gross luminous flux | 4560 Lm |
| Power | 29,5 W |
| Power values of the system | 32,78 W |
| Colour temperature | 4000 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | Mac Adam Step 2 |
| Lighting efficiency | 76% |
| Efficacy | 155 Lm/W |
| Current intensity | 900 mA |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | <input type="checkbox"/> |
| Voltage | 220 V/240 V |
| Frequency | 50/60 Hz |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tc=80°C) >60.000h |
| LIGHTING INFORMATION | |
| Ingress Protection | IP20 |
| Weight | 1970 g. |
| Packaged weight | 2095 g. |
| Packaging dimensions | 408 × 145 × 64 mm. |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |
| OTHER DATA | |



Rec is a LED appliance that is especially ideal to carry out indirect lighting functions. This is a luminaire that perfectly fits into projects that prioritise the comfort given by indirect lighting but also require a high volume of light. Formally, Rec is expressed in a slender cuboid with pure lines and a minimalist design.

POLAR DIAGRAM

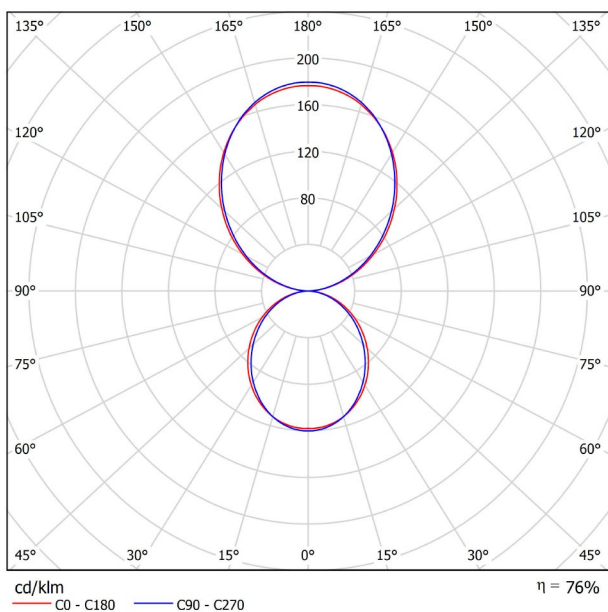

CONICAL DIAGRAM

