




## DIMENSIONS



## AWARDS

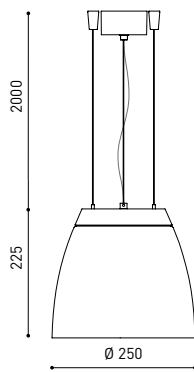

Name	SALT MINI 4000K WW
Reference	A2800012WW
Color	White-White
Power of the system	9016 & 9016
Category	SUSPENSION

## PRODUCT

SALT MINI 4000K WW

A2800012WW

White-White

9016 &amp; 9016

SUSPENSION

Light source	LED
Gross luminous flux	1425 Lm
Power	10 W
Power values of the system	13,33 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	80°
Lighting efficiency	67%
Efficacy	143 Lm/W
Current intensity	700 mA
Dimming	Phase Cut
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tc=80°C) >60.000h

## LIGHTING INFORMATION

LED

1425 Lm

10 W

13,33 W

4000 K

CRI&gt;90

Mac Adam Step 2

80°

67%

143 Lm/W

700 mA

Phase Cut

Please Consult

Included

220 V/240 V

50/60 Hz

A

L80B10 (Tc=80°C) &gt;60.000h

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	1920 g.
Packaged weight	2437 g.
Packaging dimensions	289 × 289 × 290 mm.
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate

## OTHER DATA

IP20

2 m

Yes

1920 g.

2437 g.

289 × 289 × 290 mm.


1

Aluminium / Polymethyl Methacrylate



High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffuser covering the light source.

POLAR DIAGRAM

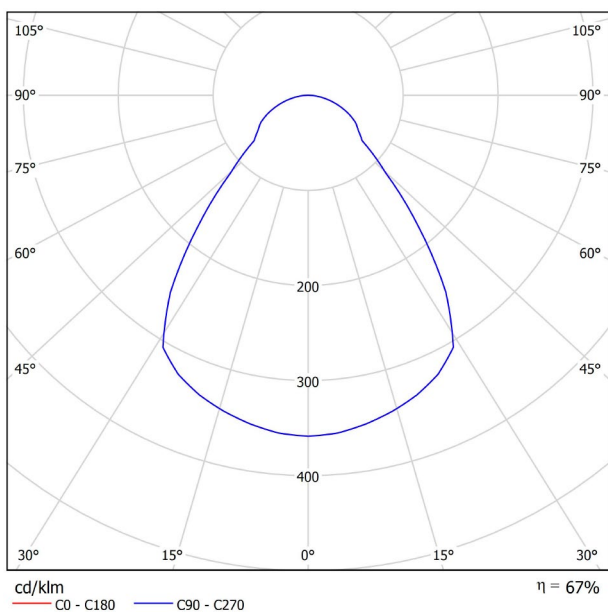

CONICAL DIAGRAM

